


Articulated feet sanitizable (stainless steel base) ø 120 - Part. PO16
Piedi sanificabili snodati (base in acciaio inox) ø 120 - Part. PO16

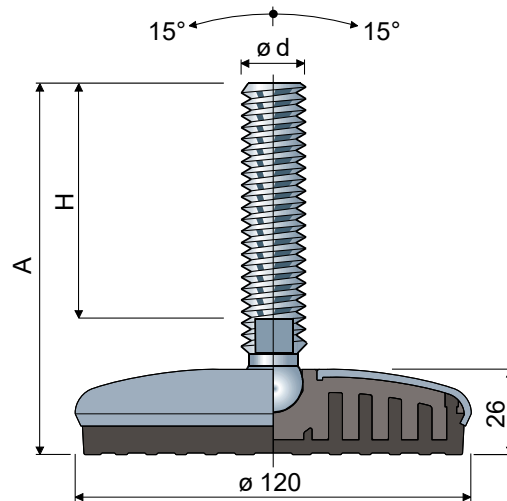

Spindle measures in mm / Misure stelo in mm

| ød | A | H | Wrench Chiave | Spindle and base in stainless steel AISI 304 Stelo e base in acciaio inox AISI 304 | | Max static load Carico statico (N) |
|---------|-----|-----|------------------|---|-------------|--|
| | | | | Type/Tipo | Code/Codice | |
| M16x2 | 103 | 60 | 13 | PO16A | CP001451 | 25000 |
| | 133 | 90 | 13 | PO16B | CP001452 | |
| | 148 | 105 | 13 | PO16C | CP001453 | |
| | 168 | 125 | 13 | PO16D | CP001454 | |
| | 198 | 155 | 13 | PO16E | CP001455 | |
| | 208 | 165 | 13 | PO16F | CP001456 | |
| M20x2,5 | 248 | 205 | 13 | PO16G | CP001457 | 27000 |
| | 132 | 86 | 17 | PO16H | CP001458 | |
| | 162 | 116 | 17 | PO16I | CP001459 | |
| | 187 | 141 | 17 | PO16L | CP001460 | |
| | 207 | 161 | 17 | PO16J | CPA00952 | |
| M24x3 | 244 | 198 | 17 | PO16M | CP001461 | 29000 |
| | 142 | 96 | 19 | PO16N | CP001462 | |
| | 168 | 122 | 19 | PO16O | CP001463 | |
| | 198 | 152 | 19 | PO16P | CP001464 | |
| M30x3,5 | 228 | 182 | 19 | PO16Q | CP001465 | 31000 |
| | 346 | 300 | 19 | PO16R | CP001466 | |
| | 191 | 144 | 24 | PO16U | CPC01451 | |

Spindle measures in mm / Misure stelo in mm

| ød | A | H | Wrench Chiave | Spindle and base in stainless steel AISI 304 Stelo e base in acciaio inox AISI 304 | | Max static load Carico statico (N) |
|-------|-----|-----|------------------|---|-------------|--|
| | | | | Type/Tipo | Code/Codice | |
| M24x2 | 184 | 138 | 19 | PO16V | CPC01452 | 29000 |
| | 199 | 153 | 19 | PO16Z | CPC01453 | |
| | 257 | 211 | 19 | PO16W | CPC01454 | |
| | 302 | 256 | 19 | PO16X | CPC01455 | |

Spindle measures in inches / Misure stelo in pollici

| ød | A | H | Wrench Chiave | Spindle and base in stainless steel AISI 304 Stelo e base in acciaio inox AISI 304 | | Max static load Carico statico (N) |
|-------------|-------|----|------------------|---|-------------|--|
| | | | | Type/Tipo | Code/Codice | |
| 5/8"-11 UNC | 8,70" | 7" | 1/2" | PO16S | CP001467 | 25000 |
| 3/4"-10 UNC | 8,78" | 7" | 5/8" | PO16T | CP001468 | 27000 |

Washers/Rosette UNI 6592-69

| ø M | M16 | M20 | M24 | M30 |
|----------------|----------|----------|----------|----------|
| S mm | 3 | 3 | 4 | 4 |
| ø A mm | 30 | 37 | 44 | 56 |
| Code/Codice IN | CP007291 | CP007292 | CP007294 | CP007296 |

BASE MATERIAL: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.

FEATURES: Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

Nuts/Dadi UNI 5588-65

| ø d | M16 | M20 | M24 | M30 |
|----------------|----------|----------|----------|----------|
| S mm | 13 | 16 | 19 | 24 |
| Ch. mm | 24 | 30 | 36 | 46 |
| Code/Codice IN | CP007277 | CP007278 | CP007280 | CP007282 |

MATERIALE BASE: Anima interna in poliammide + FV; rivestimento esterno in acciaio inox AISI 304; antivibrante in gomma termoplastica 68 shore colore nero.

CARATTERISTICHE: L'antivibrante costampato consente una perfetta aderenza con la base in acciaio. La conseguente aderenza di cavità interne rende il piede estremamente sanificabile.