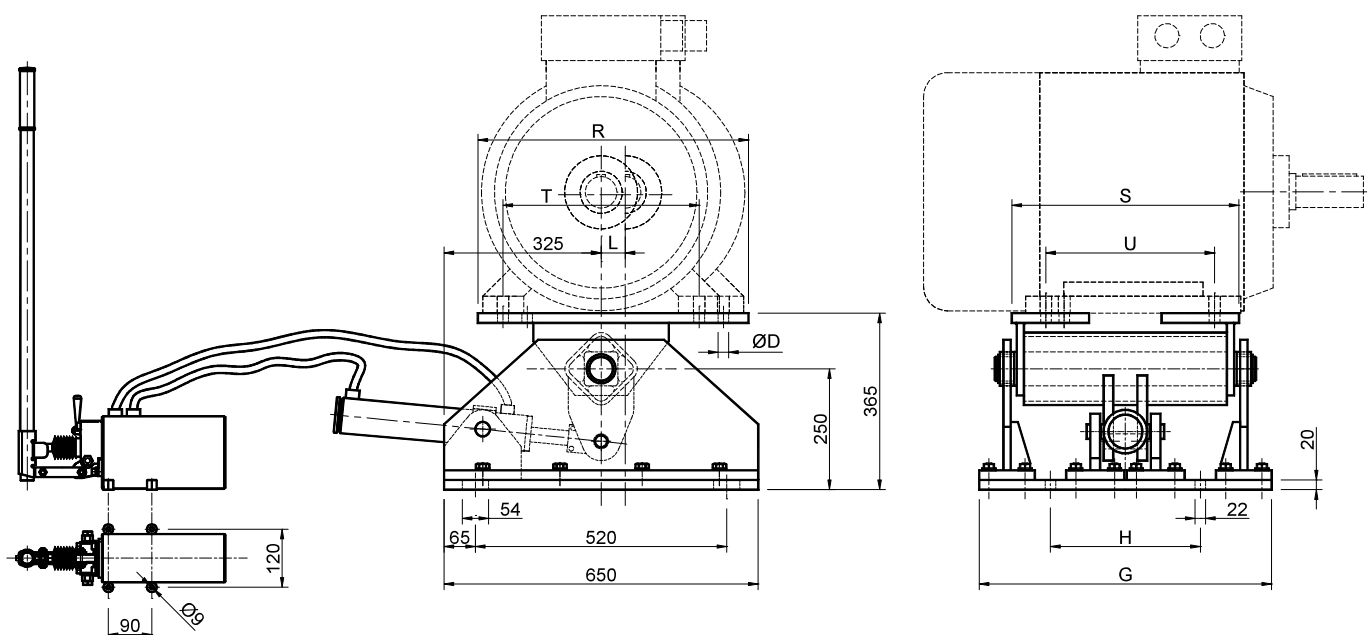


**Motorbase VIB Type: BM-H 90 / Base Motore VIB Tipo: BM-H 90**


**MATERIALS** All components are made of steel.  
**TREATMENTS** Oven painted. Bolts and nuts are galvanized.  
**USE** Belt transmission tensioner.  
 Working temperature from  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ .

**MATERIALI** Tutti i componenti sono in acciaio.  
**TRATTAMENTI** Verniciatura a forno. Bulloneria zincata.  
**IMPIEGO** Tensionamento di trasmissioni a cinghia.  
 Temperatura di lavoro da  $-40^{\circ}\text{C}$  a  $+80^{\circ}\text{C}$

Customer can install the motor in centered configuration on top of the axis or off-set configuration (measure L) if necessary for his application.

Il cliente può montare il motore in posizione centrata o in posizione "a sbalzo" (quota L) se necessario per la propria applicazione.

|                     |          |     |     |    |     |     | IEC                                       |            |            |          | NEMA                                      |            |            |          |                                |
|---------------------|----------|-----|-----|----|-----|-----|-------------------------------------------|------------|------------|----------|-------------------------------------------|------------|------------|----------|--------------------------------|
| Type<br><i>Tipo</i> | Cod. N°  | G   | H   | L  | R   | S   | Motor Size<br><i>Grandezza<br/>Motore</i> | T          | U          | D        | Motor Size<br><i>Grandezza<br/>Motore</i> | T          | U          | D        | Weight<br><i>Peso</i><br>in kg |
| BM-H 90x400         | RE022442 | 605 | 310 | 50 | 560 | 470 | 250M                                      | 406        | 349        | 22       | 404T                                      | 406        | 311        | 22       | 230                            |
| BM-H 90x550         | RE022457 | 735 | 375 | 50 | 640 | 600 | 280S<br>280M                              | 457<br>457 | 368<br>419 | 22<br>22 | 405T<br>444T                              | 406<br>507 | 349<br>368 | 22<br>22 | 250                            |
| BM-H 90x650         | RE022467 | 835 | 425 | 70 | 630 | 700 | 315S                                      | 508        | 406        | 26       | 445T                                      | 457        | 419        | 22       | 270                            |
| BM-H 90x800         | RE022471 | 985 | 500 | 70 | 730 | 850 | 315M<br>315L                              | 508<br>508 | 457<br>508 | 28<br>28 | 447T<br>449T                              | 457<br>457 | 508<br>635 | 22<br>22 | 300                            |



Fig. 1