


Oval flanged bearing supports - Series SFL/CXA LL and SXL/CXA LL
Supporti a flangia ovale - Serie SFL/CXA LL e SXL/CXA LL



External cover made out of stainless AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

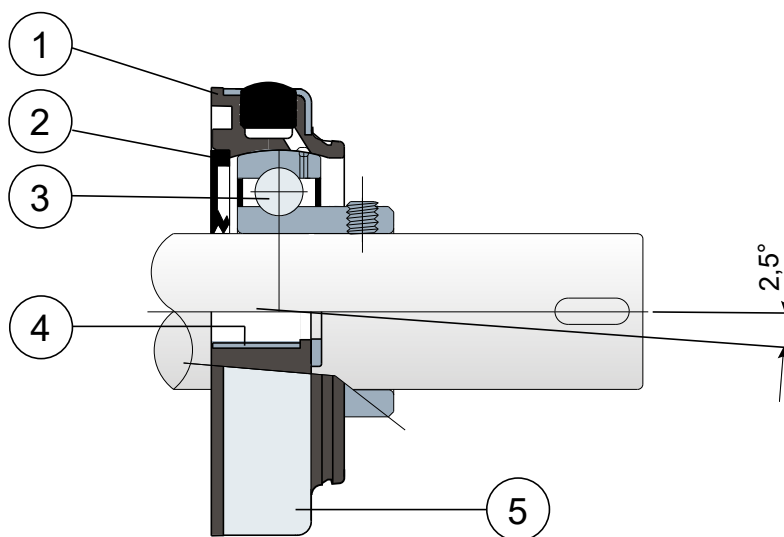

-  **1** - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2** - Back gasket made out of NBR rubber for turning shaft seal
- 3** - Chrome steel or stainless steel bearing AISI 440.
- 4** - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5** - External cover of support made out of AISI 304 stainless steel.

-  **1** - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2** - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3** - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4** - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5** - Copertura esterna supporto in acciaio inox AISI 304.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.


NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

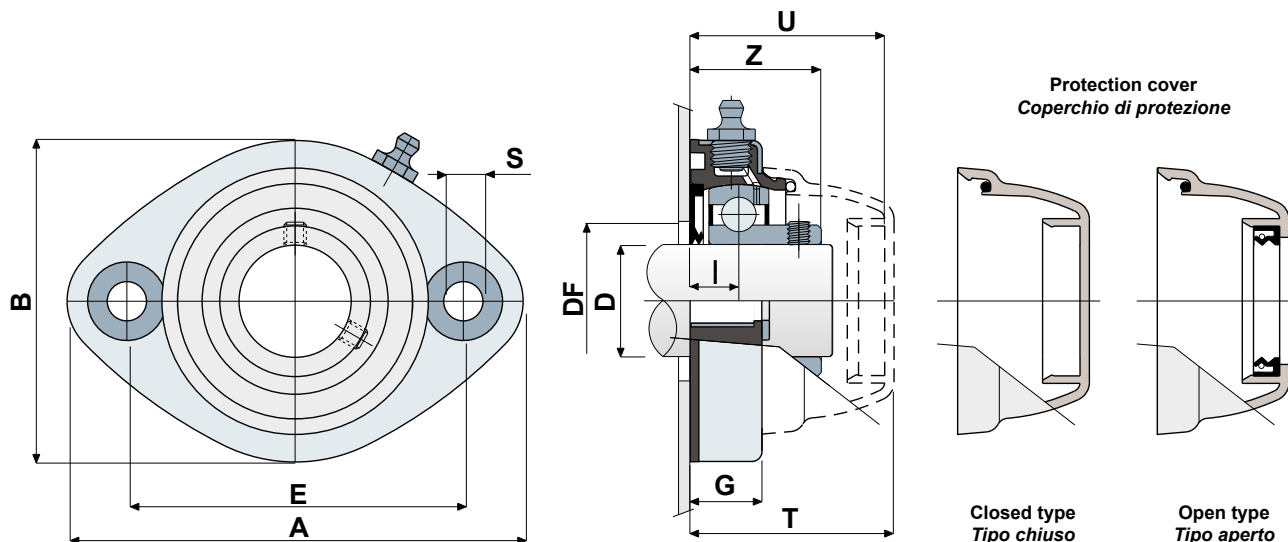

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	30	SFL/CXA 206 LL	CPB00915	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000
	35	SFL/CXA 207 LL	CPB00916	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000
	40	SFL/CXA 208 LL	CPB00917	117	147	112	11	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
 30	SXL/CXA 206 LL	CPB00918	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000	
 35	SXL/CXA 207 LL	CPB00919	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000	
 40	SXL/CXA 208 LL	CPB00920	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING/CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING/CUSCINETTO IN ACCIAIO AL CROMO																
D (inches)	SERIE	Support code <i>Codici supporto</i>	Dimensions/ <i>Dimensioni</i> (mm)											Bearing load <i>Carico cuscinetto</i> (N)		Bearing support load <i>Carico supporto</i>
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
1 1/4	SFL/CXA 206 LL	CPB00921	117	147	112	11	27	21	42	65.5	68	60	50	19500	11300	13000

COVER CODES/CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1" 1/4	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026