


Threaded bushing (for square tubes:sizes and threads in inches) - Part. TP5 Tappi filettati (per tubi quadri:dimensioni e filetti in pollici) - Part. TP5

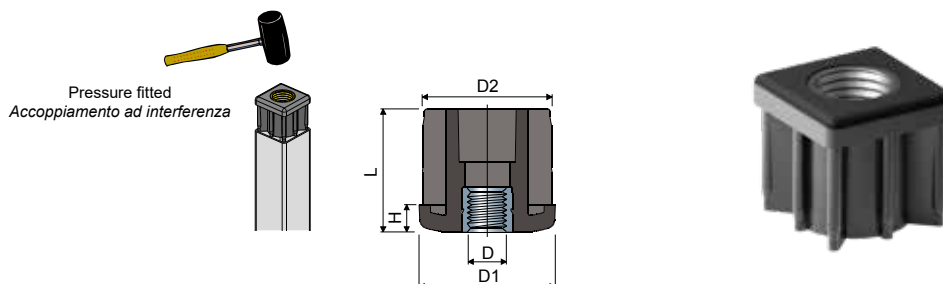


Tube dimensions/Dimensioni tubo											Type Tipo	Code Codice	Max static load Carico statico (N)
Outside Esterno		Thickness Spessore		Inside Interno	Thread Filetto D		D1	D2	H	L			
(inches)	(mm)	(inches)	(mm)		(UNC)	(mm)							
1 1/2	(38,1)	0,065"	(1,65)	34,8	3/8"-16	(9,52)	38	34,8	8	38	TP5A	CP001758	5000
					1/2"-13	(12,7)	38	34,8	8	38	TP5B	CP001759	5000
					5/8"-11	15,87)	38	34,8	8	38	TP5C	CP001760	6500
					3/4"-10	(19,05)	38	34,8	8	38	TP5D	CP001761	9000
		0,12"	(3,05)	32	3/8"-16	(9,52)	38	32	8	38	TP5E	CP001762	5000
					1/2"-13	(12,7)	38	32	8	38	TP5F	CP001763	5000
					5/8"-11	(15,87)	38	32	8	38	TP5G	CP001764	6500
					3/4"-10	(19,05)	38	32	8	38	TP5H	CP001765	9000
2"	(50,8)	0,065"	(1,65)	47,5	3/8"-16	(9,52)	50,6	47,5	10	45	TP5I	CP001766	5000
					1/2"-13	(12,7)	50,6	47,5	10	45	TP5L	CP001767	5000
					5/8"-11	(15,87)	50,6	47,5	10	45	TP5M	CP001768	6500
					3/4"-10	(19,05)	50,6	47,5	10	45	TP5N	CP001769	9000
		0,109"	(2,77)	45,26	3/8"-16	(9,52)	50,6	45,26	10	45	TP5O	CP001770	5000
					1/2"-13	(12,7)	50,6	45,26	10	45	TP5P	CP001771	5000
					5/8"-11	(15,87)	50,6	45,26	10	45	TP5Q	CP001772	6500
					3/4"-10	(19,05)	50,6	45,26	10	45	TP5R	CP001773	9000
		0,12"	(3,05)	44,7	3/8"-16	(9,52)	50,6	44,7	10	45	TP5S	CP001774	5000
					1/2"-13	(12,7)	50,6	44,7	10	45	TP5T	CP001775	5000
					5/8"-11	(15,87)	50,6	44,7	10	45	TP5U	CP001776	6500
					3/4"-10	(19,05)	50,6	44,7	10	45	TP5V	CP001777	9000

MATERIAL: Bush in reinforced polyamide black colour; threaded insert in nickel plated brass.

MATERIALI: Tappo in poliammide rinforzata colore nero, insertio filettato in ottone nichelato.

Threaded bushing (for square tubes) - Part. U30 Tappi filettati (per tubi quadri: a saldare) - Part. U30

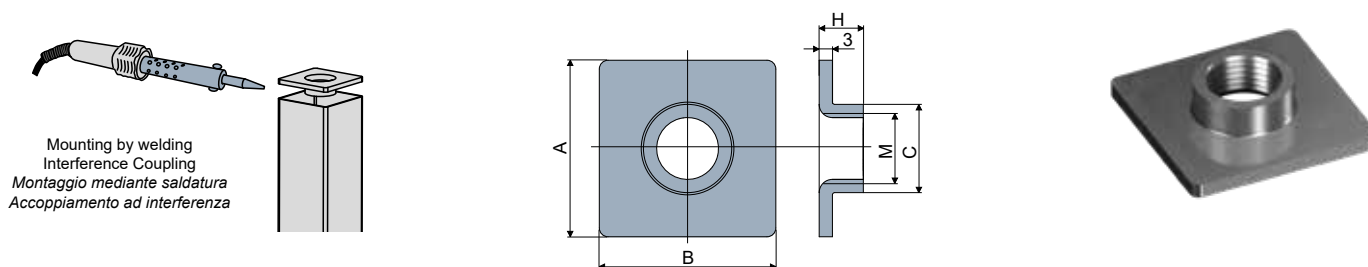

M (mm)	A (mm)	B (mm)	C (mm)	H (mm)	Type/Tipo	Code/Codice	Max Static Load Carico statico max (N)
M16	40	40	20	10	U30	CPB00029	20000
M16	50	50	20	11,5	U30A	CPB00030	20000
M20	40	40	23,5	10	U30B	CPB00031	20000
M20	50	50	23,5	11,5	U30C	CPB00032	20000

MATERIALS: Stainless steel cap.
FEATURES: Mounting by welding.

MATERIALI: Tappo in acciaio inox.
CARATTERISTICHE: Montaggio mediante saldatura.