


Waisted Bobbins - Type: **AT Hardness 55 SHORE** / *Antivibrante Sgolato - Tipo: AT Durezza 55 SHORE*

 Antivibration mounts made by rubber and steel parts
MATERIALS metal components are zinc plated. NR/SBR rubber compound.
HARDNESS 55 SHORE +/-5%
USE male-male

 *Antivibranti gomma-metallo*
MATERIALI parti metalliche sono zincate. Parti in gomma mescola NR/SBR.
DUREZZA 55 SHORE +/-5%
IMPIEGO maschio-maschio

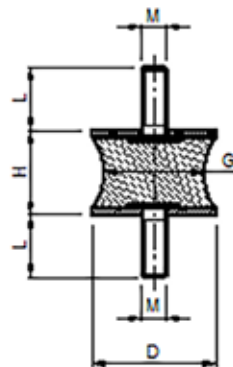


Type/Tipo	Cod. N°	D	H	G	L	M
AT 10-10	AV002288	10	10	8	10	M4
A2M 12-15	AV002292	12	15	7	10	M4
AT 20-15	AV002296	20	15	14	18	M6
AT 20-19	AV002297	20	19	14	15	M6
AT 20-30	AV002298	20	30	12	12	M6
AT 20-40	AV002299	20	40	15	12	M6
AT2M 25-20	AV002304	25	20	10	18	M6
AT2M 30-20	AV002310	30	20	20	20	M8
AT 30-25	AV002311	30	25	23	15	M8
AT 40-28	AV002318	40	28	35	28	M10

Type/Tipo	Cod. N°	D	H	G	L	M
AT2M 40-30	AV002319	40	30	19	20	M8
A2M 40-30-27	AV002320	40	30	27	20	M8
AT 40-48	AV002321	40	48	20	23	M8
AT 46-25	AV002325	46	25	40	20	M10
AT 50-30	AV002330	50	30	41	33	M10
AT 60-60	AV002335	60	60	49	28	M10
AT 75-40	AV002339	75	40	54	37	M12
AT 100-55	AV002344	100	55	80	43	M16
AT 100-75	AV002345	100	75	95	41	M16

Waisted Bobbins - Type: **BT Hardness 55 SHORE** / *Antivibrante Sgolato - Tipo: BT Durezza 55 SHORE*

 Antivibration mounts made by rubber and steel parts
MATERIALS metal components are zinc plated. NR/SBR rubber compound.
HARDNESS 55 SHORE +/-5%
USE female-male

 *Antivibranti gomma-metallo*
MATERIALI parti metalliche sono zincate. Parti in gomma mescola NR/SBR.
DUREZZA 55 SHORE +/-5%
IMPIEGO femmina-maschio



Type/Tipo	Cod. N°	D	H	G	L	T	M
BT 10-10	AV002402	10	10	8	10	4	M4
BT 15-15	AV002405	15	15	12	12	5	M6
BT 20-15	AV002408	20	15	14	18	6	M6
BT 20-19	AV002409	20	19	14	10	6	M6
BT 25-20	AV002412	25	20	18	18	6	M6
BT 30-20	AV002415	30	20	25	20	8	M8
BT 40-30-M8	AV002417	40	30	25	23	8	M8
BT 40-30-M10	AV002418	40	30	25	20	10	M10
BT 55-45	AV002421	55	45	46	28	10	M10
BT 60-60	AV002424	60	60	49	28	10	M10