


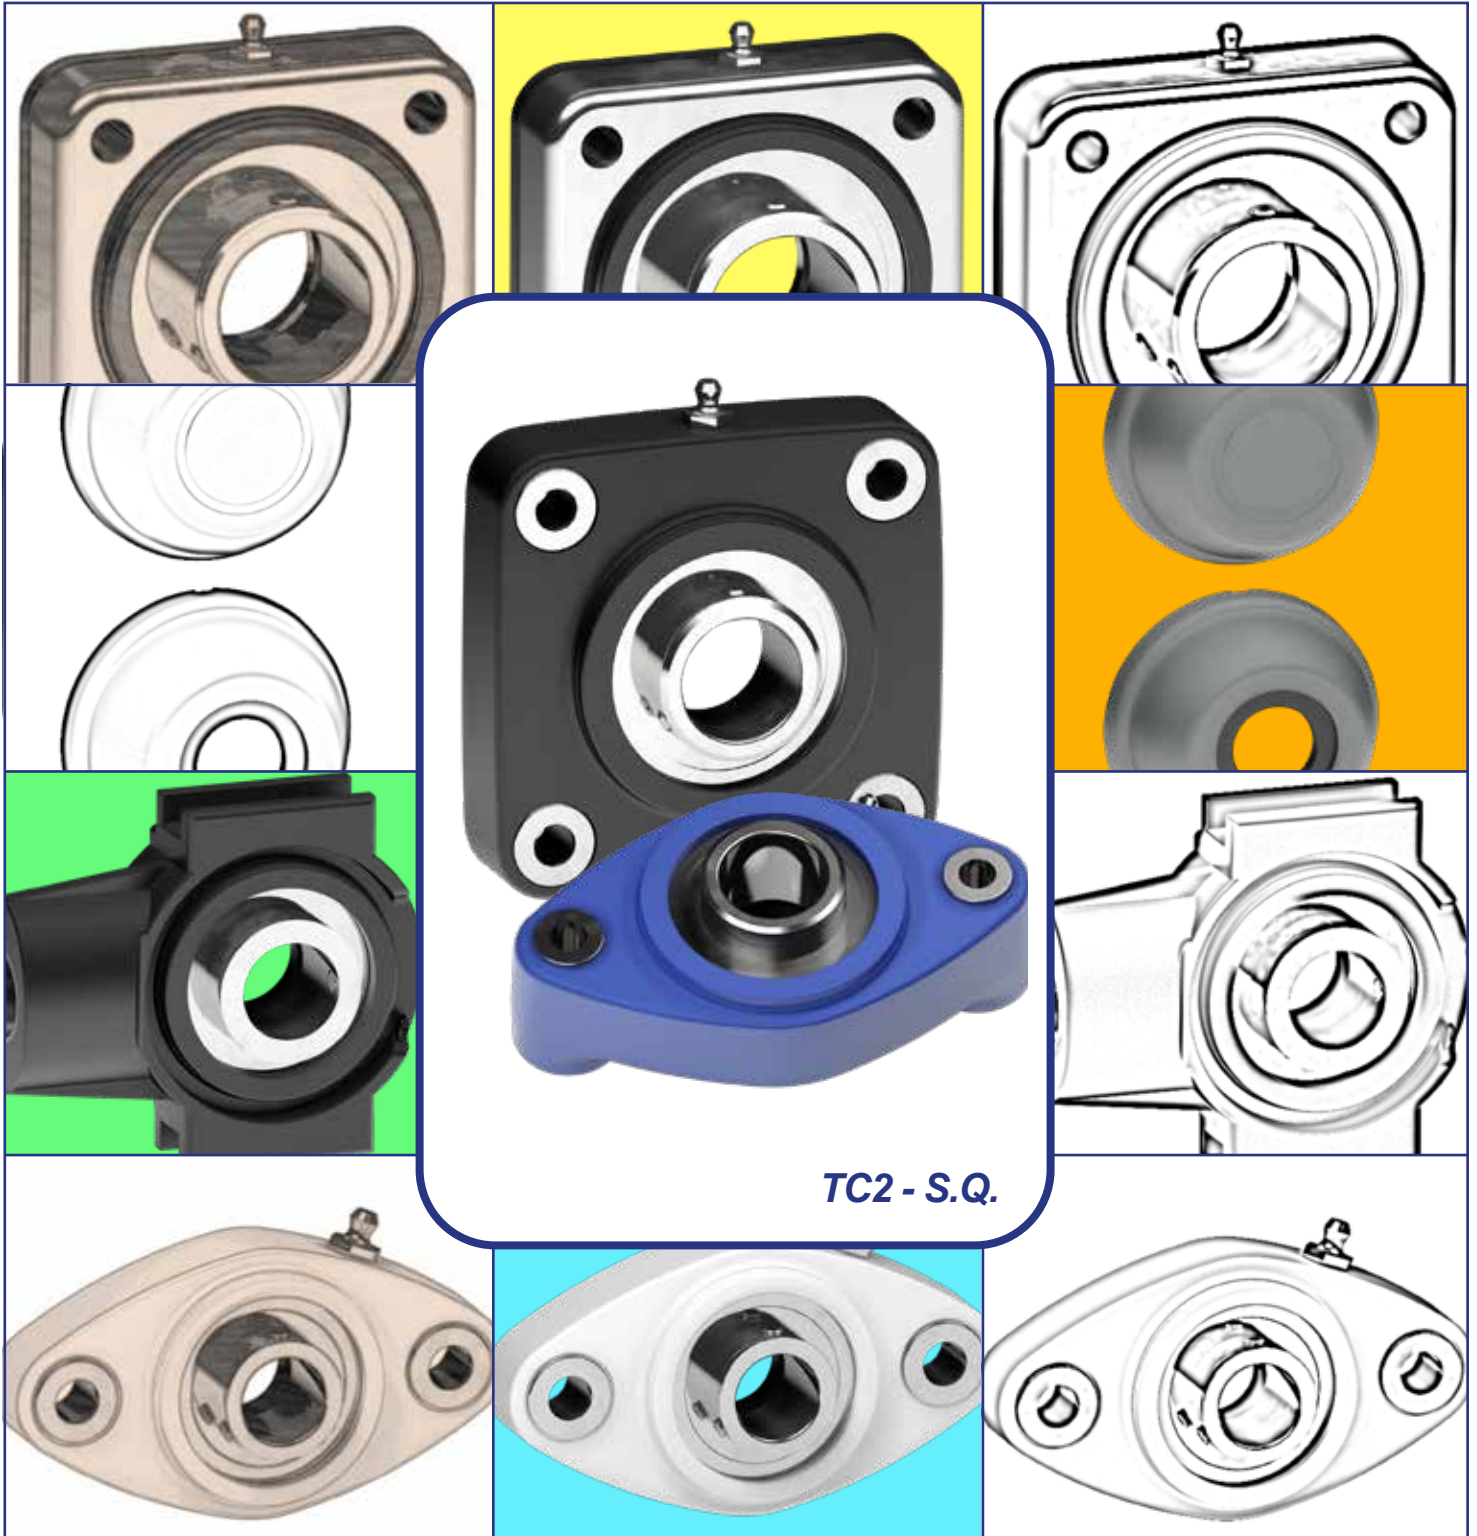

Series SF/CX	Series SF/CX EC	Series SF/CX LL	Series SF/CX EC LL
Pag.C-4	Pag.C-4A	Pag.C-4B	Pag.C-4C
Series SF/CX SOLID	Series SF/CX EC SOLID	Series SF	Series SF EC
Pag.C-4D	Pag.C-4E	Pag.C-6	Pag.C-6A
Series SF LL	Series SF EC LL	Series SF/CS	Series SF CS LL
Pag.C-6B	Pag.C-6C	Pag.C-8	Pag.C-8A
Series SF CXA	Series SF/CXA EC	Series SF/CXA LL	Series SF/CXA EC LL
Pag.C-10	Pag.C-10A	Pag.C-10B	Pag.C-10C
Series SFF	Series HSF/CX	Series HSF/CX EC	Series HSF/CX LL
Pag.C-12	Pag.C-12A	Pag.C-12B	Pag.C-12C
Series HSF/CX EC LL	Series SFL/CX	Series SFL/CX EC	Series SFL/CX LL
Pag.C-12D	Pag.C-14	Pag.C-14A	Pag.C-14B
Series SFL/CX EC LL	Series SFL/CX SOLID	Series SFL/CX EC SOLID	Series SFL
Pag.C-14C	Pag.C-14D	Pag.C-14E	Pag.C-16
Series SFL EC	Series SFL LL	Series SFL EC LL	Series SFL/CS
Pag.C-16A	Pag.C-16B	Pag.C-16C	Pag.C-18


			
Series SFL/CX LL Pag.C-18A	Series SFFL Pag.C-20	Series HSFL/CX Pag.C-22	Series HSFL/CX EC Pag.C-22A
			
Series HSFL/CX LL Pag.C-22B	Series HSFL/CX EC LL Pag.C-22C	Series SFL/CXA Pag.C-24	Series SFL/CXA EC Pag.C-24A
			
Series SFL/CXA LL Pag.C-24B	Series SFL/CXA EC LL Pag.C-24C	Series SFB/CX Pag.C-26	Series SFB/CX EC Pag.C-26A
			
Series SFB/CX LL Pag.C-26B	Series SFB/CX EC LL Pag.C-26C	Series SFB/CX SOLID Pag.C-26D	Series SFB/CX EC SOLID Pag.C-26E
			
Series SFB Pag.C-28	Series SFB EC Pag.C-28A	Series SFB LL Pag.C-28B	Series SFB EC LL Pag.C-28C
			
Series SP/CX Pag.C-30	Series SP/CX EC Pag.C-30A	Series SP/CX LL Pag.C-30B	Series SP/CX EC LL Pag.C-30C
			
Series SP Pag.C-32	Series SP EC Pag.C-32A	Series SP LL Pag.C-32B	Series SP EC LL Pag.C-32C
			
Series HSP/CX Pag.C-32D	Series HSP/CX EC Pag.C-32E	Series HSP/CX LL Pag.C-32F	Series HSP/CX EC LL Pag.C-32G

 Series SPA/CX Pag.C-34	 Series SPA/CX EC Pag.C-34A	 Series SPA/CX LL Pag.C-34B	 Series SPA CX EC LL Pag.C-34C
 Series SPA Pag.C-36	 Series SPA EC Pag.C-36A	 Series SPA LL Pag.C-36B	 Series SPA EC LL Pag.C-36C
 Series ST/CX Pag.C-38	 Series ST/CX EC Pag.C-38A	 Series ST/CX LL Pag.C-38B	 Series ST/CX EC LL Pag.C-38C
 Series ST Pag.C-40	 Series ST EC Pag.C-40A	 Series ST LL Pag.C-40B	 Series ST EC LL Pag.C-40C
 Series SFC/CX Pag.C-42	 Series SFC/CX EC Pag.C-42A	 Series SFC/CX LL Pag.C-42B	 Series SFC/CX EC LL Pag.C-42C
 Series SFC Pag.C-44	 Series SFC EC Pag.C-44A	 Series SFC LL Pag.C-44B	 Series SFC EC LL Pag.C-44C

Square flanged bearing supports - Series SF/CX (SX/CX) and MSF/CX (MSX/CX) Supporti a flangia quadra - Serie SF/CX (SX/CX) e MSF/CX (MSX/CX)



Without protection cover / Senza coperchio di protezione

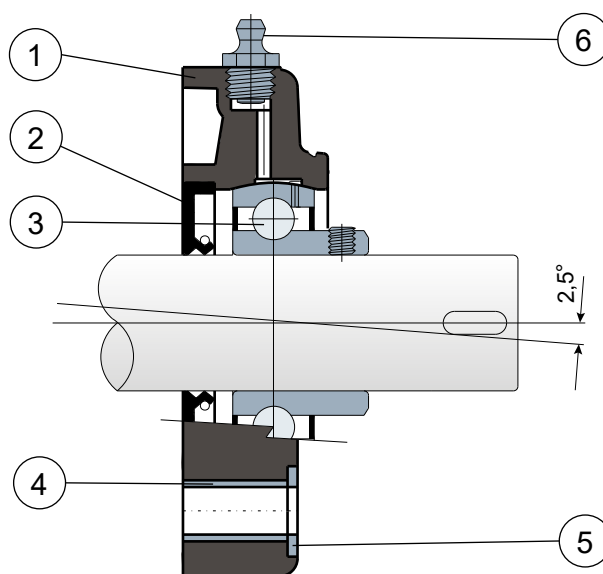

- | | |
|---|---|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel or stainless steel bearing AISI 440.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.</p> |
|---|---|

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

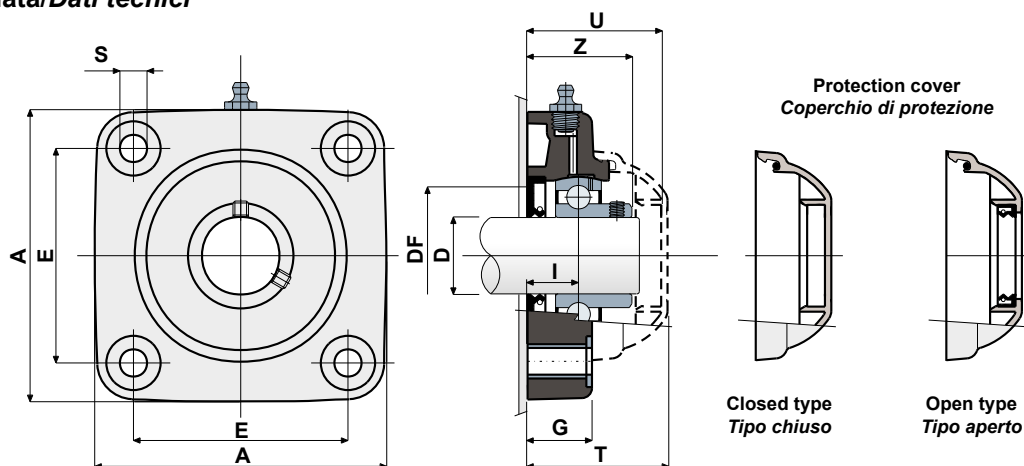

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																	
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	20	SF/CX 204	CP000572	CPA00544	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500
	25	SF/CX 205	CP000573	CPA00545	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
	30	SF/CX 206	CP000574	CPA00546	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
\$	30	MSF/CX 206	CPA00574	CPA00547	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500
	35	SF/CX 207	CP000575	CPA00548	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000
\$	35	MSF/CX 207	CP000576	CPA00549	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000
	40	SF/CX 208	CP000577	CPA00550	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000
\$	40	MSF/CX 208	CP000578	CPA00551	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	20	SX/CX 204	CP000579	CPA00552	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	16500
	25	SX/CX 205	CP000580	CPA00553	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000
	30	SX/CX 206	CP000581	CPA00554	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500
S	30	MSX/CX 206	CPA00581	CPA00555	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500
	35	SX/CX 207	CP000582	CPA00556	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000
S	35	MSX/CX 207	CP000583	CPA00557	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000
	40	SX/CX 208	CP000584	CPA00558	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000
S	40	MSX/CX 208	CP000585	CPA00559	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARINGS / CUSCINETTI IN ACCIAIO AL CROMO																
D (inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
1"	SF/CX 205	CPA00577	CPA00582	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
1 1/4	SF/CX 206	CPA00578	CPA00583	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
1 1/4	MSF/CX 206	CPA00579	CPA00584	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1 1/4"	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Square flanged bearing supports - Series SF/CX EC and MSF/CX EC Supporti a flangia quadra - Serie SF/CX EC e MSF/CX EC



Fixing with eccentric collar / Fissaggio con collare eccentrico

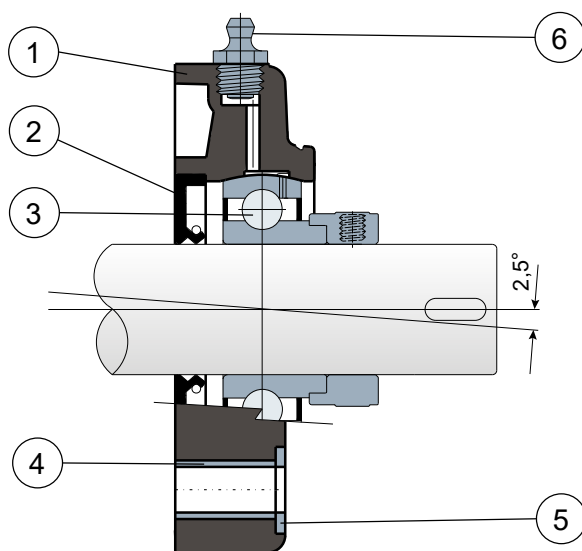

- | | |
|---|---|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel bearing.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.</p> |
|---|---|

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

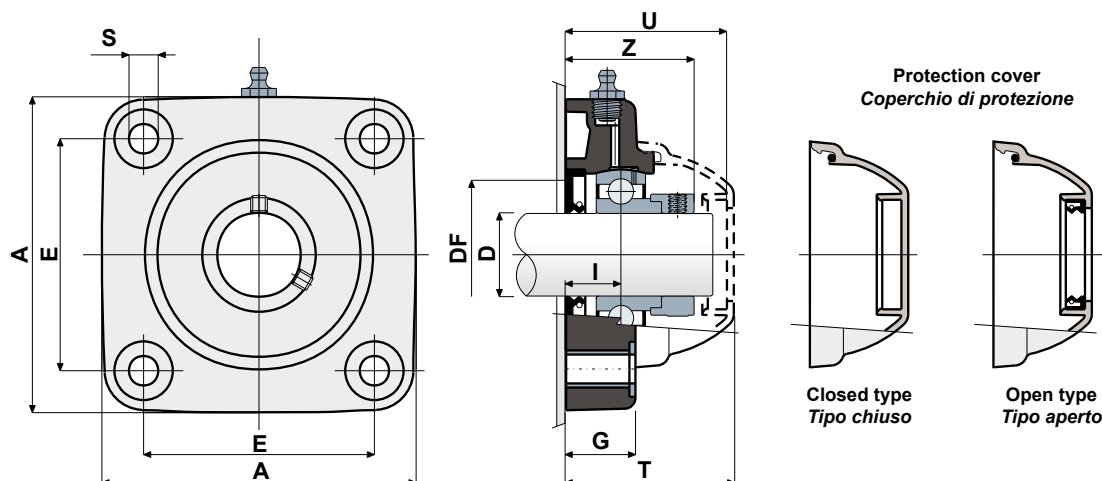

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
20	SF/CX 204 EC	CPC00579	CPC00587	63,5	90	10,5	19	15,5	39	51	53,5	45	40	12800	6600	16500
25	SF/CX 205 EC	CPC00580	CPC00588	70	99	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	17000
30	SF/CX 206 EC	CPC00581	CPC00589	83	113	10,5	26	20,7	47,4	59,4	61,9	60	50	19500	11300	17500
S 30	MSF/CX 206 EC	CPC00582	CPC00590	83	113	10,5	26	20,7	47,4	65	68	60	50	19500	11300	17500
35	SF/CX 207 EC	CPC00583	CPC00591	92	122	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	18000
S 35	MSF/CX 207 EC	CPC00584	CPC00592	83	113	10,5	26	20	49,3	65	68	70	55	25500	15300	18000
40	SF/CX 208 EC	CPC00585	CPC00593	102	133	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000
S 40	MSF/CX 208 EC	CPC00586	CPC00594	83	113	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF/CX LL and MSF/CX LL Supporti a flangia quadra - Serie SF/CX LL e MSF/CX LL



Without protection cover / Senza coperchio di protezione

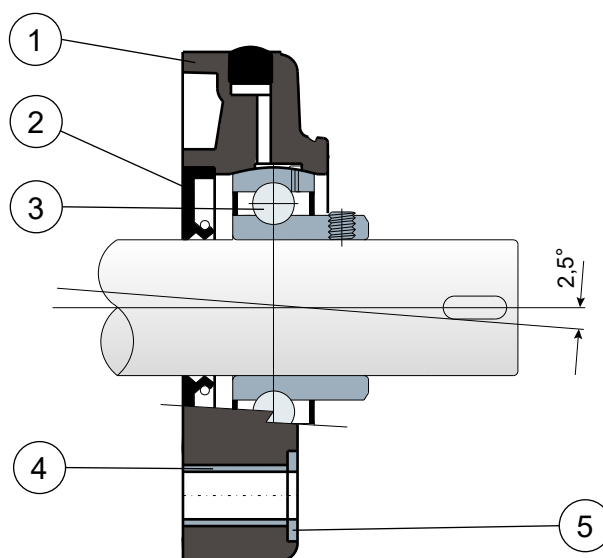

- | | |
|---|---|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel or stainless steel bearing AISI 440.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> |
|---|---|

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

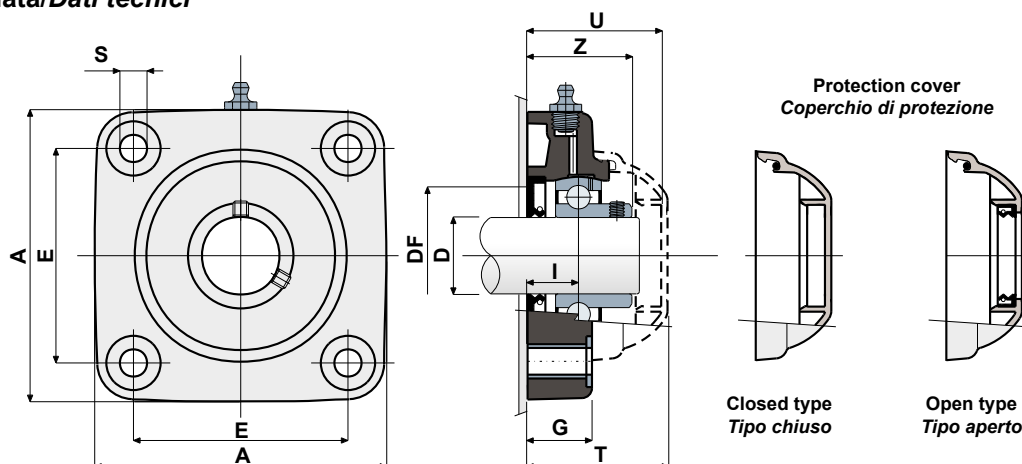

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																	
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
		LONG LIFE BEARINGS															
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	20	SF/CX 204 LL	CPC00958	CPC00966	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500
	25	SF/CX 205 LL	CPC00959	CPC00967	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
S	30	SF/CX 206 LL	CPC00960	CPC00968	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
	30	MSF/CX 206 LL	CPC00961	CPC00969	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500
S	35	SF/CX 207 LL	CPC00962	CPC00970	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000
	35	MSF/CX 207 LL	CPC00963	CPC00971	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000
S	40	SF/CX 208 LL	CPC00964	CPC00972	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000
	40	MSF/CX 208 LL	CPC00965	CPC00973	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BEARING AISI 440 C/SSINERVO IN ACCIAIO INOX AISI 440																	
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
		LONG LIFE BEARINGS															
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF Max Min		C	C0	(N)	
	20	SX/CX 204 LL	CPC00974	CPC00982	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	16500
	25	SX/CX 205 LL	CPC00975	CPC00983	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000
S	30	SX/CX 206 LL	CPC00976	CPC00984	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500
	30	MSX/CX 206 LL	CPC00977	CPC00985	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500
S	35	SX/CX 207 LL	CPC00978	CPC00986	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000
	35	MSX/CX 207 LL	CPC00979	CPC00987	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000
S	40	SX/CX 208 LL	CPC00980	CPC00988	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000
	40	MSX/CX 208 LL	CPC00981	CPC00989	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS															
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
1"	SF/CX 205 LL	CPC00990	CPC00993	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	
1 1/4"	SF/CXL 206 LL	CPC00991	CPC00994	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	
S 1 1/4"	MSF/CX 206 LL	CPC00992	CPC00995	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1 1/4"	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Square flanged bearing supports - Series SF/CX EC LL and MSF/CX EC LL Supporti a flangia quadra - Serie SF/CX EC LL e MSF/CX EC LL



Fixing with eccentric collar / Fissaggio con collare eccentrico

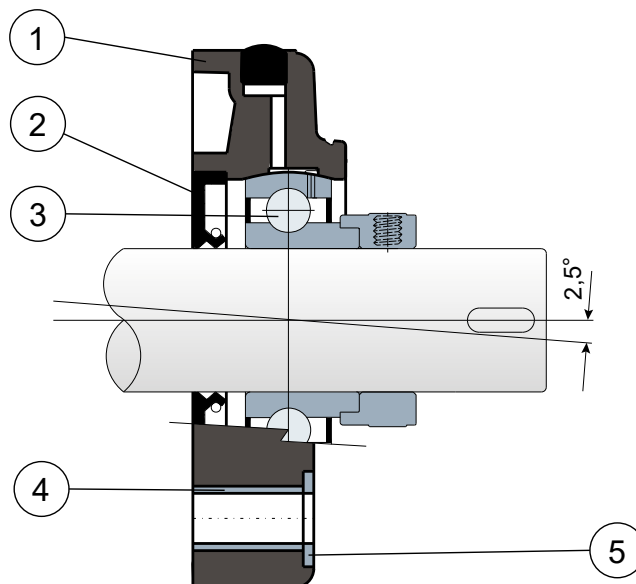

- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel bearing.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass (absent in the versions with LONG LIFE bearing).</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato (assente nelle versioni LONG LIFE).</p> |
|---|--|

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

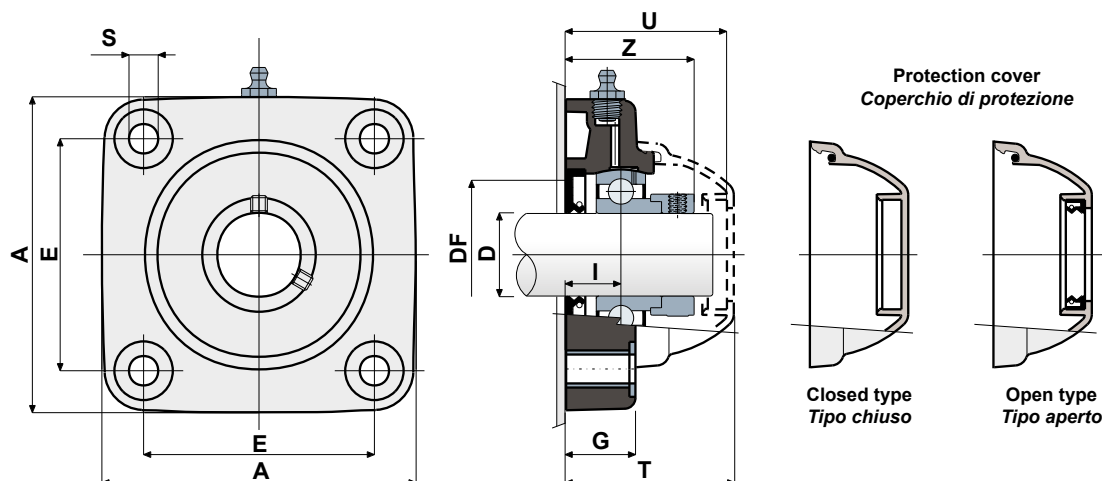

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
		LONG LIFE BEARINGS														
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	
20	SF/CX 204 EC LL	CPC00996	CPC01004	63,5	90	10,5	19	15,5	39	51	53,5	45	40	12800	6600	16500
25	SF/CX 205 EC LL	CPC00997	CPC01005	70	99	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	17000
30	SF/CX 206 EC LL	CPC00998	CPC01006	83	113	10,5	26	20,7	47,4	59,4	61,9	60	50	19500	11300	17500
S 30	MSF/CX 206 EC LL	CPC00999	CPC01007	83	113	10,5	26	20,7	47,4	65	68	60	50	19500	11300	17500
35	SF/CX 207 EC LL	CPC01000	CPC01008	92	122	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	18000
S 35	MSF/CX 207 EC LL	CPC01001	CPC01009	83	113	10,5	26	20	49,3	65	68	70	55	25500	15300	18000
40	SF/CX 208 EC LL	CPC01002	CPC01010	102	133	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000
S 40	MSF/CX 208 EC LL	CPC01003	CPC01011	83	113	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF/CX and MSF/CX (SOLID)
Supporti a flangia quadra - Serie SF/CX e MSF/CX (SOLID)



Without protection cover / Senza coperchio di protezione

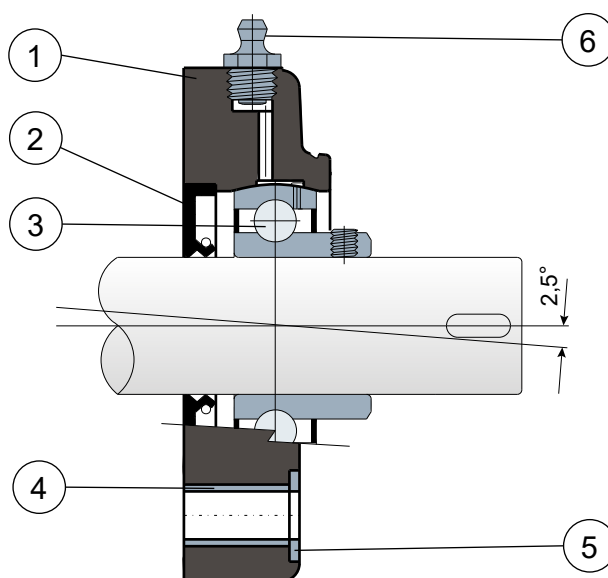

- 1** - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
2 - Back gasket made out of NBR rubber for turning shaft seal.
3 - Chrome steel or stainless steel bearing AISI 440.
4 - UNI 6592 support washer made out of stainless steel AISI 304.
5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303 (absent in the versions with LONG LIFE bearing).

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

- 1** - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303 (assente nelle versioni LONG LIFE).

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**


Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

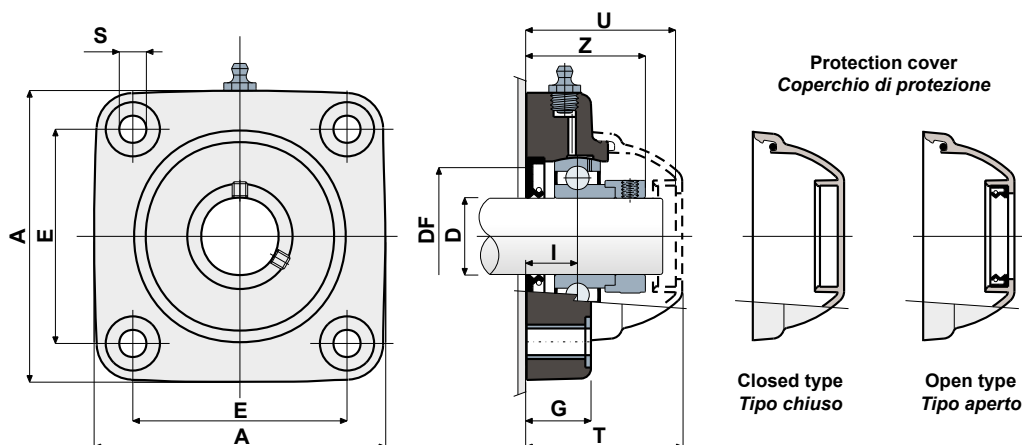

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005															
		Standard bearings	Long Life bearings	E	A	S	G	I	Z	U	T	DF			C	C0	(N)
20	SF/CX 204 SOLID	CPC01012	CPC01019	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600		16500
25	SF/CX 205 SOLID	CPC01013	CPC01020	70	99	10,5	22	17	36	47	49	50	45	14000	7800		17000
30	MSF/CX 206 SOLID	CPC01014	CPC01021	83	113	10,5	26	20	41	65	68	60	50	19500	11300		17500
35	SF/CX 207 SOLID	CPC01015	CPC01022	92	122	10,5	26	20	45	57	59	70	55	25500	15300		18000
35	MSF/CX 207 SOLID	CPC01016	CPC01023	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300		18000
40	SF/CX 208 SOLID	CPC01017	CPC01024	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800		18000
40	MSF/CX 208 SOLID	CPC01018	CPC01025	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800		18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005															
		Standard bearings	Long Life bearings	E	A	S	G	I	Z	U	T	DF			C	C0	(N)
20	SX/CX 204 SOLID	CPC01026	CPC01033	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600		16500
25	SX/CX 205 SOLID	CPC01027	CPC01034	70	99	10,5	22	17	36	47	49	50	45	9150	7800		17000
30	MSX/CX 206 SOLID	CPC01028	CPC01035	83	113	10,5	26	20	41	65	68	60	50	12500	11200		17500
35	SX/CX 207 SOLID	CPC01029	CPC01036	92	122	10,5	26	20	45	57	59	70	55	16600	15300		18000
35	MSX/CX 207 SOLID	CPC01030	CPC01037	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300		18000
40	SX/CX 208 SOLID	CPC01031	CPC01038	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000		18000
40	MSX/CX 208 SOLID	CPC01032	CPC01039	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000		18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005															
		Standard bearings	Long Life bearings	E	A	S	G	I	Z	U	T	DF			C	C0	(N)
1"	SF/CX 205 SOLID	CPC01040	CPC01042	70	99	10,5	22	17	36	47	49	50	45	14000	7800		17000
1 1/4"	MSF/CX 206 SOLID	CPC01041	CPC01043	83	113	10,5	26	20	41	65	68	60	50	19500	11300		17500


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Square flanged bearing supports - Series SF/CX EC and MSF/CX EC (SOLID) Supporti a flangia quadra - Serie SF/CX EC e MSF/CX EC (SOLID)



Fixing with eccentric collar / Fissaggio con collare eccentrico

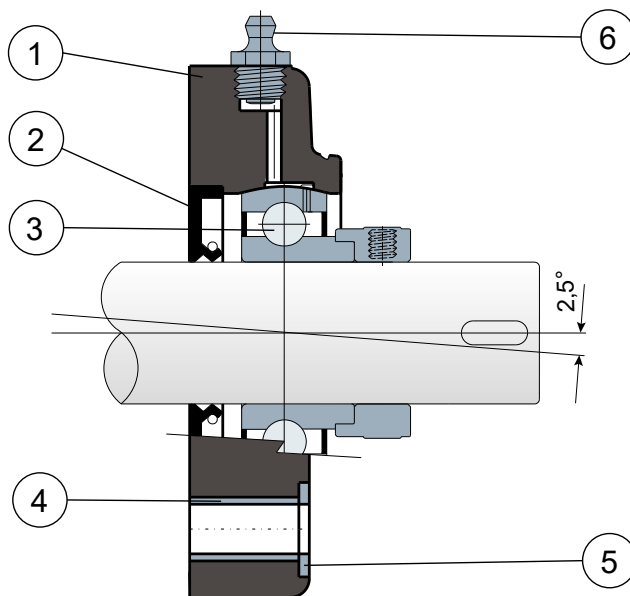


- 1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303 (absent in the versions with LONG LIFE bearing).

- 1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303 (assente nelle versioni LONG LIFE).

Support dimensions respect ISO 3228 set of rules
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

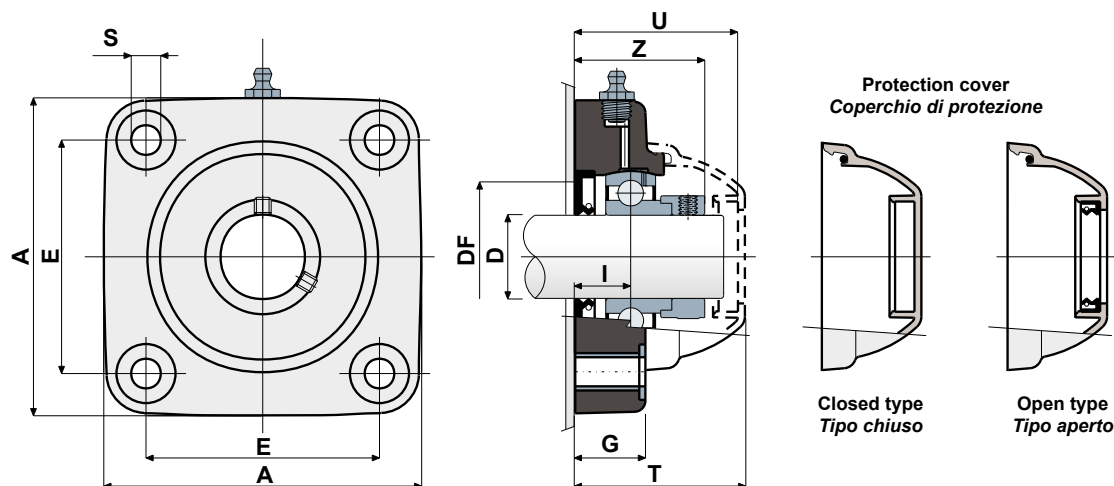

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005														
		Standard bearings	Long Life bearings	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
20	SF/CX 204 EC SOLID	CPC01044	CPC01051	63,5	90	10,5	19	15,5	39	51	53,5	45	40	12800	6600	16500
25	SF/CX 205 EC SOLID	CPC01045	CPC01052	70	99	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	17000
30	MSF/CX 206 EC SOLID	CPC01046	CPC01053	83	113	10,5	26	20,7	47,4	65	68	60	50	19500	11300	17500
35	SF/CX 207 EC SOLID	CPC01047	CPC01054	92	122	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	18000
35	MSF/CX 207 EC SOLID	CPC01048	CPC01055	83	113	10,5	26	20	49,3	65	68	70	55	25500	15300	18000
40	SF/CX 208 EC SOLID	CPC01049	CPC01056	102	133	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000
40	MSF/CX 208 EC SOLID	CPC01050	CPC01057	83	113	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF (SX) and MSF (MSX) Supporti a flangia quadra - Serie SF (SX) e MSF (MSX)



Without cover and back gasket / Senza coperchio e guarnizione posteriore

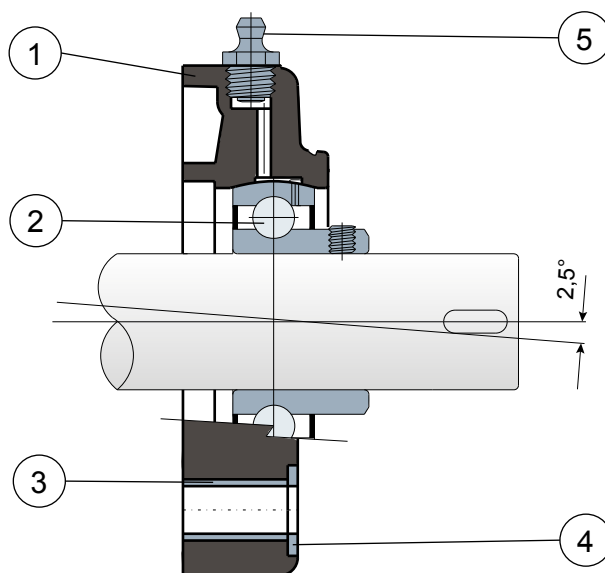

- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Chrome steel or stainless steel bearing AISI 440.</p> <p>3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>4 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>5 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>5 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.</p> |
|---|--|

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228


Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

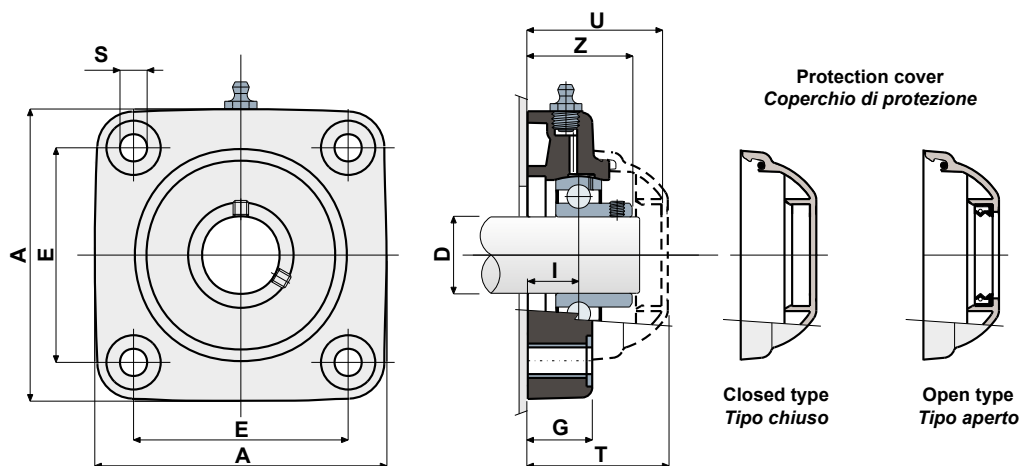

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	20	SF 204	CP000586	CPA00560	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500
	25	SF 205	CP000587	CPA00561	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
	30	SF 206	CP000588	CPA00562	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
\$	30	MSF 206	CPA00588	CPA00563	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500
	35	SF 207	CP000589	CPA00564	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000
\$	35	MSF 207	CP000590	CPA00565	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000
	40	SF 208	CP000591	CPA00566	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000
\$	40	MSF 208	CP000592	CPA00567	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	20	SX 204	CP000593	CPA00568	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	16500
	25	SX 205	CP000594	CPA00569	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000
	30	SX 206	CP000595	CPA00570	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500
§	30	MSX 206	CPA00595	CPA00571	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500
	35	SX 207	CP000596	CPA00572	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000
§	35	MSX 207	CP000597	CPA00573	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000
	40	SX 208	CP000598	CPA00575	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000
§	40	MSX 208	CP000599	CPA00576	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARINGS / CUSCINETTI IN ACCIAIO AL CROMO																
D (inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
1"	SF 205	CPA00585	CPA00589	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
1 1/4	SF 206	CPA00586	CPA00590	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
1 1/4	MSF 206	CPA00587	CPA00591	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1 1/4"	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Square flanged bearing supports - Series SF EC and MSF EC Supporti a flangia quadra - Serie SF EC e MSF EC



Without cover and back gasket / Senza coperchio e guarnizione posteriore

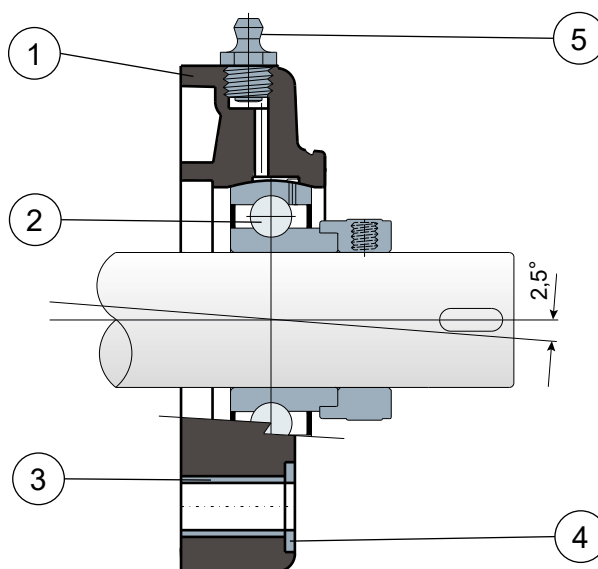


- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Chrome steel or stainless steel bearing AISI 440.</p> <p>3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>4 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>5 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>5 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.</p> |
|---|--|

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

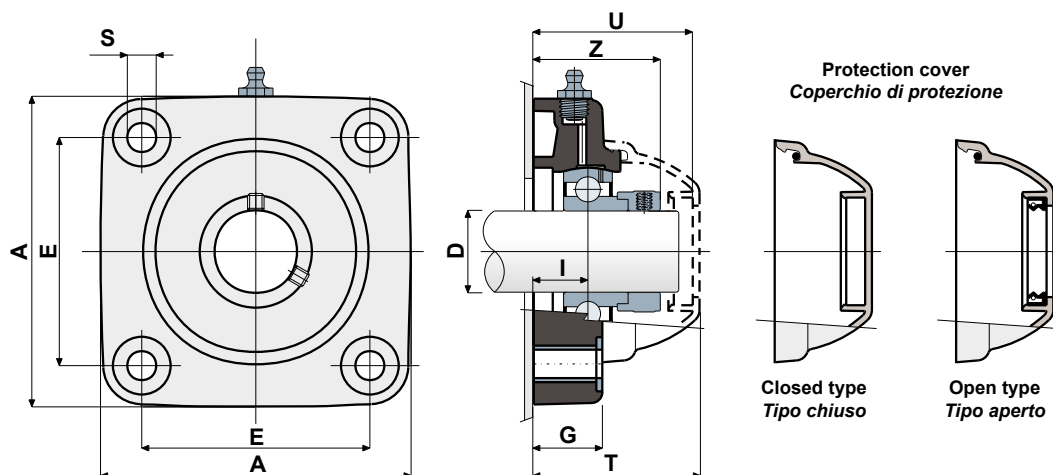

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
20	SF 204 EC	CPC01058	CPC01066	63,5	90	10,5	19	15,5	39	51	53,5	45	40	12800	6600	16500
25	SF 205 EC	CPC01059	CPC01067	70	99	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	17000
30	SF 206 EC	CPC01060	CPC01068	83	113	10,5	26	20,7	47,4	59,4	61,9	60	50	19500	11300	17500
S 30	MSF 206 EC	CPC01061	CPC01069	83	113	10,5	26	20,7	47,4	65	68	60	50	19500	11300	17500
S 35	SF 207 EC	CPC01062	CPC01070	92	122	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	18000
S 35	MSF 207 EC	CPC01063	CPC01071	83	113	10,5	26	20	49,3	65	68	70	55	25500	15300	18000
40	SF 208 EC	CPC01064	CPC01072	102	133	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000
S 40	MSF 208 EC	CPC01065	CPC01073	83	113	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF LL and MSF LL Supporti a flangia quadra - Serie SF LL e MSF LL



Without cover and back gasket / Senza coperchio e guarnizione posteriore

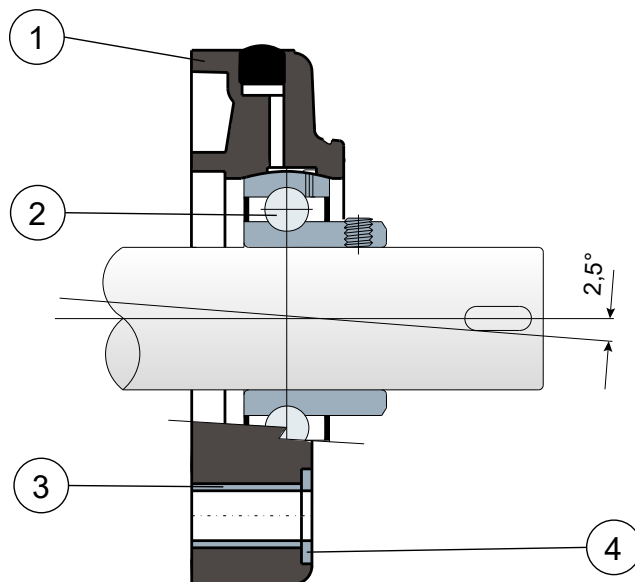

- | | |
|--|---|
| <p>1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Chrome steel or stainless steel bearing AISI 440.</p> <p>3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>4 - UNI 6592 support washer made out of stainless steel AISI 304.</p> | <p>1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> |
|--|---|

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**


Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

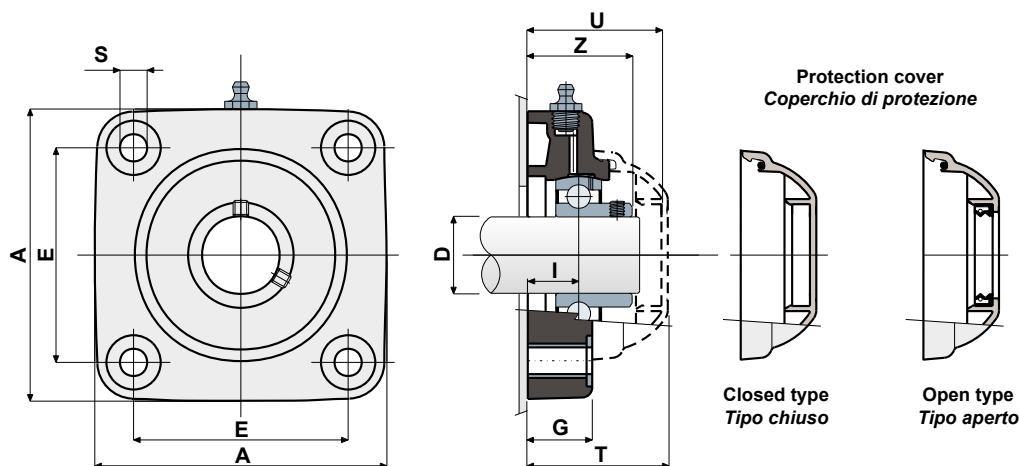

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
		LONG LIFE BEARINGS															
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF			C	C0	(N)
20	SF 204 LL	CPC01074	CPC01082	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40		12800	6600	16500
25	SF 205 LL	CPC01075	CPC01083	70	99	10,5	22	17	36	47	49	50	45		14000	7800	17000
30	SF 206 LL	CPC01076	CPC01084	83	113	10,5	26	20	41	54	56	60	50		19500	11300	17500
30	MSF 206 LL	CPC01077	CPC01085	83	113	10,5	26	20	41	65	68	60	50		19500	11300	17500
35	SF 207 LL	CPC01078	CPC01086	92	122	10,5	26	20	45	57	59	70	55		25500	15300	18000
35	MSF 207 LL	CPC01079	CPC01087	83	113	10,5	26	19,5	45	65	68	70	55		25500	15300	18000
40	SF 208 LL	CPC01080	CPC01088	102	133	10,5	26	19,5	48,5	65	68	78	65		32500	19800	18000
40	MSF 208 LL	CPC01081	CPC01089	83	113	10,5	26	19,5	48,5	65	68	78	65		32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
		LONG LIFE BEARINGS															
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF			C	C0	(N)
20	SX 204 LL	CPC01090	CPC01098	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40		8300	6600	16500
25	SX 205 LL	CPC01091	CPC01099	70	99	10,5	22	17	36	47	49	50	45		9150	7800	17000
30	SX 206 LL	CPC01092	CPC01100	83	113	10,5	26	20	41	54	56	60	50		12500	11200	17500
30	MSX 206 LL	CPC01093	CPC01101	83	113	10,5	26	20	41	65	68	60	50		12500	11200	17500
35	SX 207 LL	CPC01094	CPC01102	92	122	10,5	26	20	45	57	59	70	55		16600	15300	18000
35	MSX 207 LL	CPC01095	CPC01103	83	113	10,5	26	19,5	45	65	68	70	55		16600	15300	18000
40	SX 208 LL	CPC01096	CPC01104	102	133	10,5	26	19,5	48,5	65	68	78	65		20000	19000	18000
40	MSX 208 LL	CPC01097	CPC01105	83	113	10,5	26	19,5	48,5	65	68	78	65		20000	19000	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
		LONG LIFE BEARINGS															
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF			C	C0	(N)
1"	SF 205 LL	CPC01106	CPC01109	70	99	10,5	22	17	36	47	49	50	45		14000	7800	17000
1 1/4"	SF 206 LL	CPC01107	CPC01110	83	113	10,5	26	20	41	54	56	60	50		19500	11300	17500
1 1/4"	MSF 206 LL	CPC01108	CPC01111	83	113	10,5	26	20	41	65	68	60	50		19500	11300	17500


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1 1/4"	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Square flanged bearing supports - Series SF EC LL and MSF EC LL Supporti a flangia quadra - Serie SF EC LL e MSF EC LL



Without cover and back gasket / Senza coperchio e guarnizione posteriore

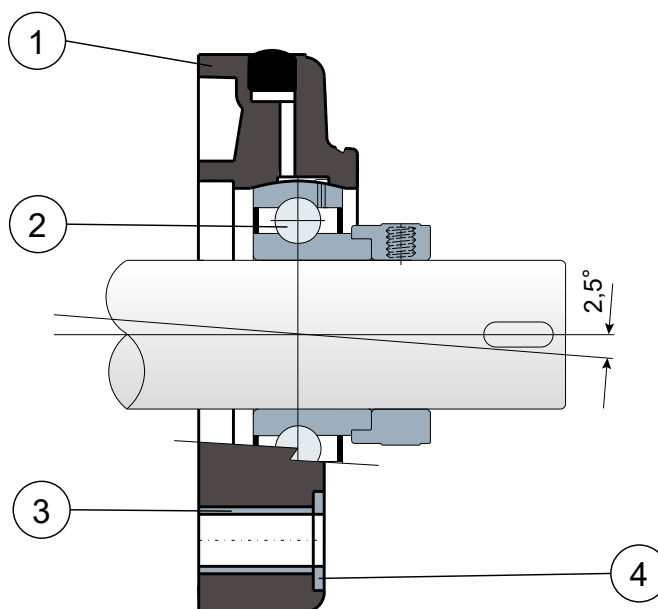


- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Chrome steel or stainless steel bearing AISI 440.</p> <p>3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>4 - UNI 6592 support washer made out of stainless steel AISI 304.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> |
|---|--|

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

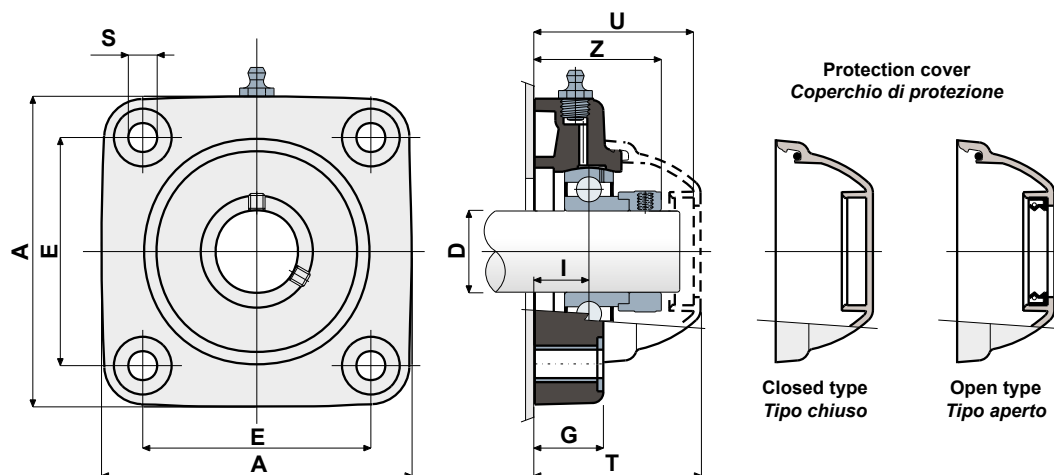

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS														
		BLACK NERO	WHITE BIANCO	E	A	S	G	I	Z	U	T	DF		C	C0	(N)
20	SF 204 EC LL	CPC01112	CPC01120	63,5	90	10,5	19	15,5	39	51	53,5	45	40	12800	6600	16500
25	SF 205 EC LL	CPC01113	CPC01121	70	99	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	17000
30	SF 206 EC LL	CPC01114	CPC01122	83	113	10,5	26	20,7	47,4	59,4	61,9	60	50	19500	11300	17500
S 30	MSF 206 EC LL	CPC01115	CPC01123	83	113	10,5	26	20,7	47,4	65	68	60	50	19500	11300	17500
35	SF 207 EC LL	CPC01116	CPC01124	92	122	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	18000
S 35	MSF 207 EC LL	CPC01117	CPC01125	83	113	10,5	26	20	49,3	65	68	70	55	25500	15300	18000
40	SF 208 EC LL	CPC01118	CPC01126	102	133	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000
S 40	MSF 208 EC LL	CPC01119	CPC01127	83	113	10,5	26	19,5	52,2	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF/CS (SX/CS) and MSF/CS (MSX/CS) Supporti a flangia quadra - Serie SF/CS (SX/CS) e MSF/CS (MSX/CS)



Back gasket for shouldered shaft / Guarnizione posteriore per albero con spallamento

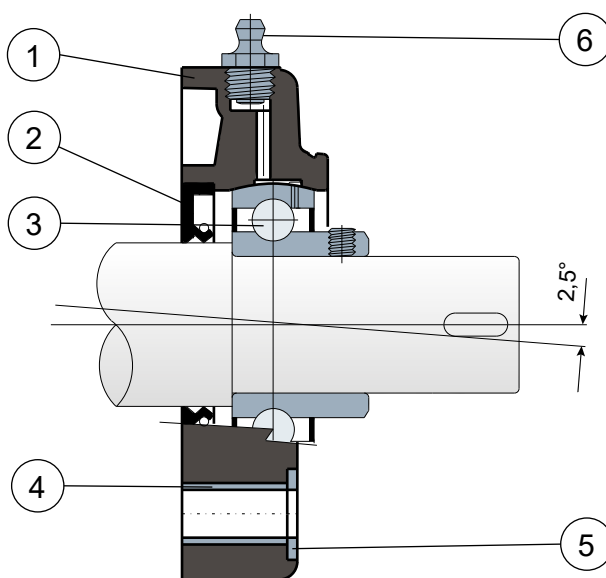

- 1 - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - UNI 6592 support washer made out of stainless steel AISI 304.
- 6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

- 1 - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

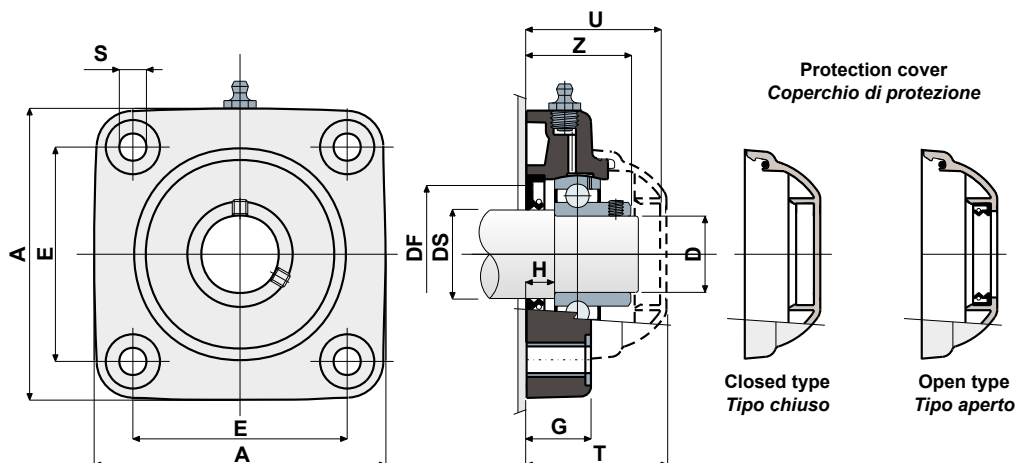

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			BLACK NERO	WHITE BIANCO	E	A	S	G	H	Z	U	T	DF		C	C0	
													Max	Min			
	25	SF/CS 204	CP000600	CPA00606	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500
	30	SF/CS 205	CP000601	CPA00607	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000
	35	SF/CS 206	CP000602	CPA00608	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500
S	35	MSF/CS 206	CPA00602	CPA00609	83	113	10,5	26	11,5	41	65	68	60	50	19500	11300	17500
	40	SF/CS 207	CP000603	CPA00610	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000
S	40	MSF/CS 207	CPA00603	CPA00611	83	122	10,5	26	10,5	45	65	68	70	55	25500	15300	18000
	45	SF/CF 208	CP000604	CPA00612	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000
S	45	MSF/CS 208	CP000605	CPA00613	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			BLACK NERO	WHITE BIANCO	E	A	S	G	H	Z	U	T	DF		C	C0	
													Max	Min			
	25	SX/CS 204	CPA00519	CPA00534	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500
	30	SX/CS 205	CPA00520	CPA00535	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000
	35	SX/CS 206	CPA00521	CPA00536	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500
S	35	MSX/CS 206	CPA00522	CPA00537	83	113	10,5	26	11,5	41	65	68	60	50	19500	11300	17500
	40	SX/CS 207	CPA00523	CPA00538	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000
S	40	MSX/CS 207	CPA00524	CPA00539	83	122	10,5	26	10,5	45	65	68	70	55	25500	15300	18000
	45	SX/CF 208	CPA00525	CPA00540	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000
S	45	MSX/CS 208	CPA00526	CPA00541	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000


COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
25	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
30	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
35	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
40	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
45	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
45	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

Square flanged bearing supports - Series SF/CS LL and MSF/CS LL Supporti a flangia quadra - Serie SF/CS LL e MSF/CS LL



Back gasket for shouldered shaft / Guarnizione posteriore per albero con spallamento

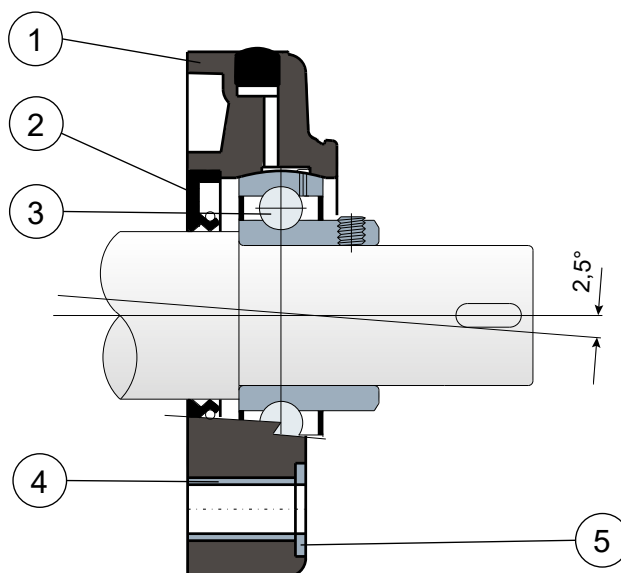

- 1 - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - UNI 6592 support washer made out of stainless steel AISI 304.

- 1 - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.


NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

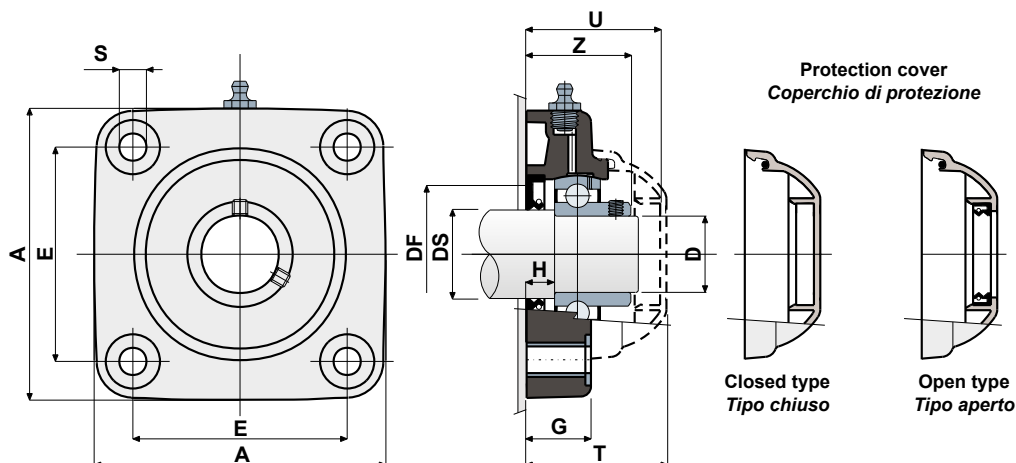

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			LONG LIFE BEARINGS		E	A	S	G	H	Z	U	T	DF		C	C0	
			BLACK NERO	WHITE BIANCO									Max	Min			
25	20	SF/CS 204 LL	CPC01128	CPC01136	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500
30	25	SF/CS 205 LL	CPC01129	CPC01137	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000
35	30	SF/CS 206 LL	CPC01130	CPC01138	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500
S 35	30	MSF/CS 206 LL	CPC01131	CPC01139	83	113	10,5	26	11,5	41	65	68	60	50	19500	11300	17500
40	35	SF/CS 207 LL	CPC01132	CPC01140	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000
S 40	35	MSF/CS 207 LL	CPC01133	CPC01141	83	122	10,5	26	10,5	45	65	68	70	55	25500	15300	18000
45	40	SF/CF 208 LL	CPC01134	CPC01142	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000
S 45	40	MSF/CS 208 LL	CPC01135	CPC01143	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			LONG LIFE BEARINGS		E	A	S	G	H	Z	U	T	DF		C	C0	
			BLACK NERO	WHITE BIANCO									Max	Min			
25	20	SX/CS 204 LL	CPC01144	CPC01152	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500
30	25	SX/CS 205 LL	CPC01145	CPC01153	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000
35	30	SX/CS 206 LL	CPC01146	CPC01154	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500
S 35	30	MSX/CS 206 LL	CPC01147	CPC01155	83	113	10,5	26	11,5	41	65	68	60	50	19500	11300	17500
40	35	SX/CS 207 LL	CPC01148	CPC01156	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000
S 40	35	MSX/CS 207 LL	CPC01149	CPC01157	83	122	10,5	26	10,5	45	65	68	70	55	25500	15300	18000
45	40	SX/CF 208 LL	CPC01150	CPC01158	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000
S 45	40	MSX/CS 208 LL	CPC01151	CPC01159	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
25	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
30	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
35	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
40	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
45	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
45	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF/CXA (SX/CXA)
Supporti a flangia quadra - Serie SF/CXA (SX/CXA)



External cover made out of stainless steel AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

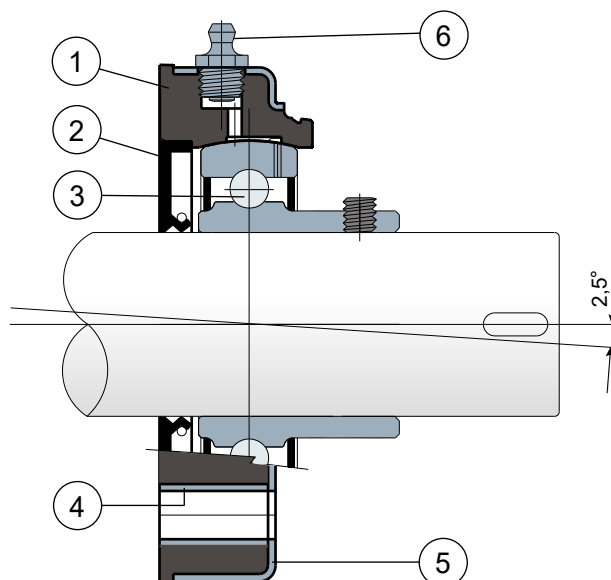

-  1 - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - External cover of support made out of AISI 304 stainless steel.
- 6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

-  1 - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Copertura esterna supporto in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**


Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

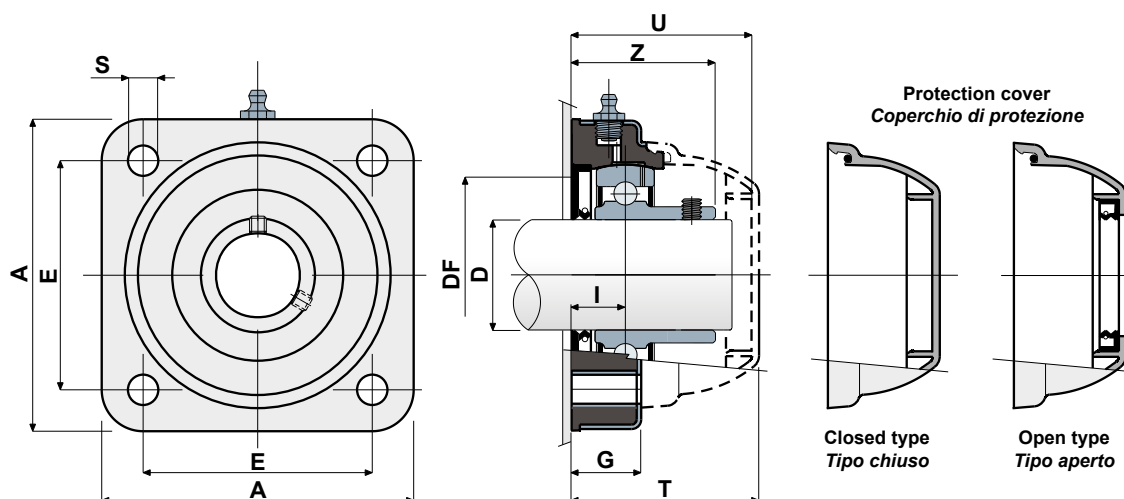

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO															
D	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			E	A	S	G	I	Z	U	T	DF		C	C0	
											Max	Min			
 30	SF/CXA 206	CP000618	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
 35	SF/CXA 207	CP000619	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
 40	SF/CXA 208	CP000620	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BEARING AISI 440 C - DIMENSIONS IN MILLIMETERS IN ASSIATO INOX AISI 440 C															
D	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			E	A	S	G	I	Z	U	T	DF		C	C0	
											Max	Min			
 30	SX/CXA 206	CP000621	83	113	11	27	20	41	65	68	60	50	12500	11200	17500
 35	SX/CXA 207	CP000622	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000
 40	SX/CXA 208	CP000623	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)
											Max	Min			
S 1 1/4	SX/CXA 206	CPA00618	83	113	11	27	20	41	65	68	60	50	19500	11300	17500


COVER CODES/CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1 1/4	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Square flanged bearing supports - Series SF/CXA EC Supporti a flangia quadra - Serie SF/CXA EC



External cover made out of stainless steel AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

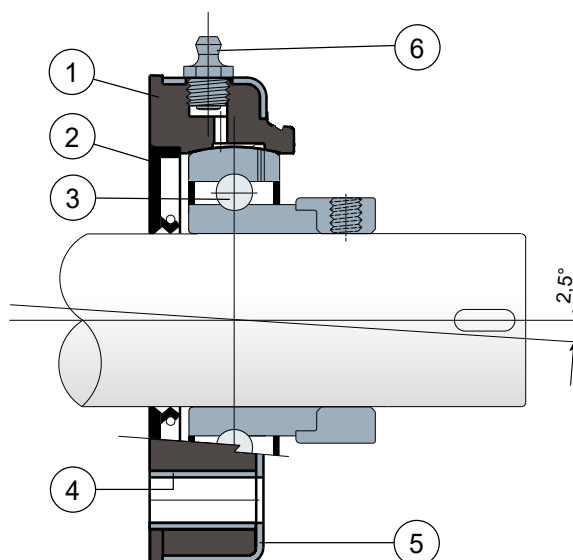

- 1** - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2** - Back gasket made out of NBR rubber for turning shaft seal.
- 3** - Chrome steel bearing.
- 4** - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5** - External cover of support made out of AISI 304 stainless steel.
- 6** - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

- 1** - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2** - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3** - Cuscinetto in acciaio al cromo.
- 4** - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5** - Copertura esterna supporto in acciaio inox AISI 304.
- 6** - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

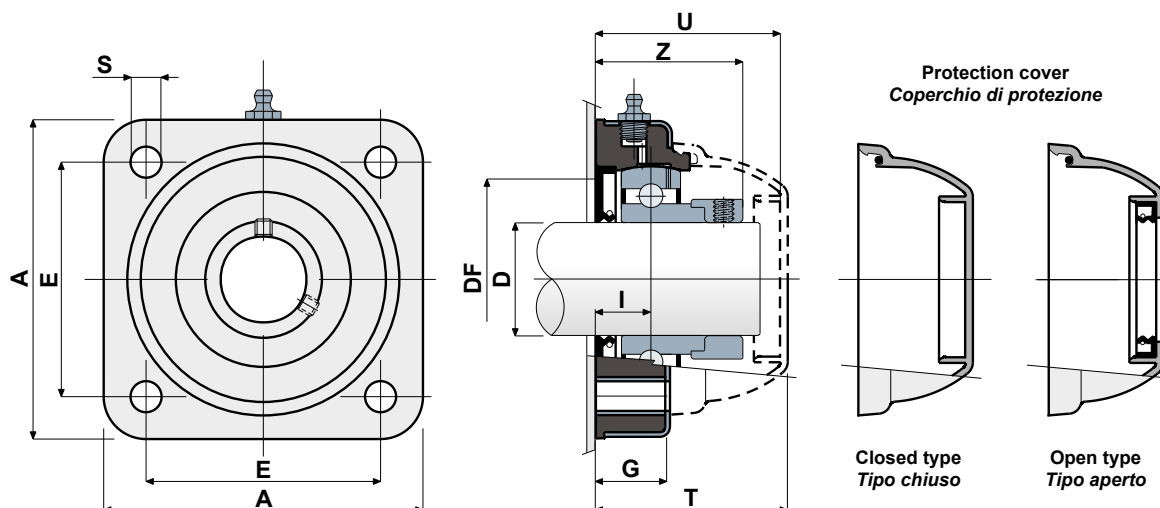

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO CROMATO															
D	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)
											Max	Min			
 30	SF/CXA 206 EC	CPC00830	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
 35	SF/CXA 207 EC	CPC00831	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
 40	SF/CXA 208 EC	CPC00832	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF/CXA LL
Supporti a flangia quadra - Serie SF/CXA LL



External cover made out of stainless steel AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

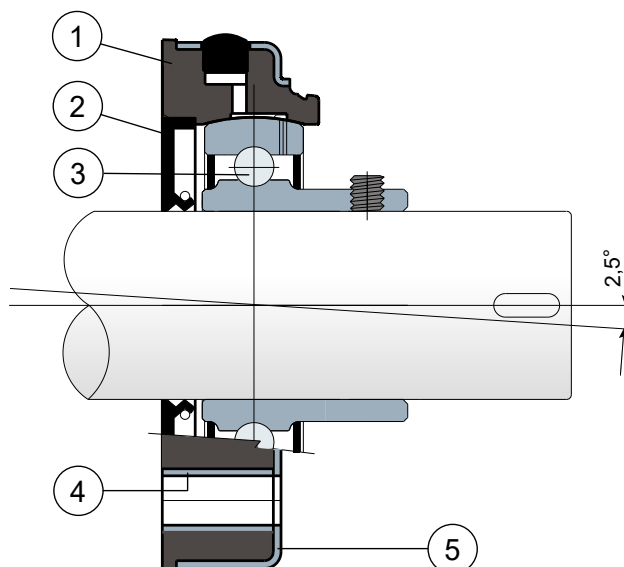

-  1 - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - External cover of support made out of AISI 304 stainless steel.

-  1 - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Copertura esterna supporto in acciaio inox AISI 304.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

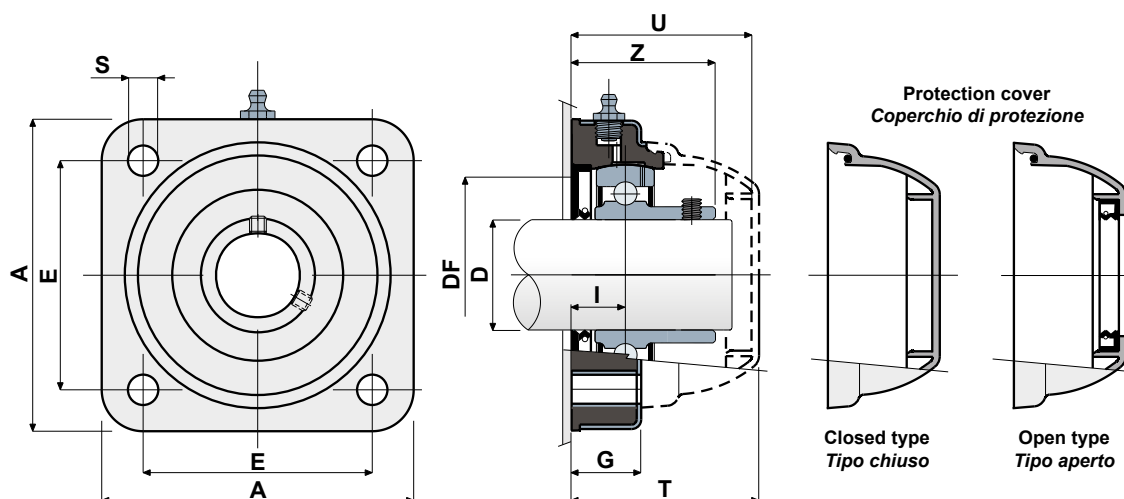

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO															
D	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			LONG LIFE BEARINGS	E	A	S	G	I	Z	U	T	DF		C	
		Max										Min			
 30	SF/CXA 206 LL	CPC01160	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
 35	SF/CXA 207 LL	CPC01161	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
 40	SF/CXA 208 LL	CPC01162	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Max									Min				
 30	SX/CXA 206 LL	CPC01163	83	113	11	27	20	41	65	68	60	50	12500	11200	17500
 35	SX/CXA 207 LL	CPC01164	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000
 40	SX/CXA 208 LL	CPC01165	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Max									Min				
S 1 1/4	SX/CXA 206 LL	CPC01166	83	113	11	27	20	41	65	68	60	50	19500	11300	17500

COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1 1/4	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SF/CXA EC LL
Supporti a flangia quadra - Serie SF/CXA EC LL



External cover made out of stainless steel AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

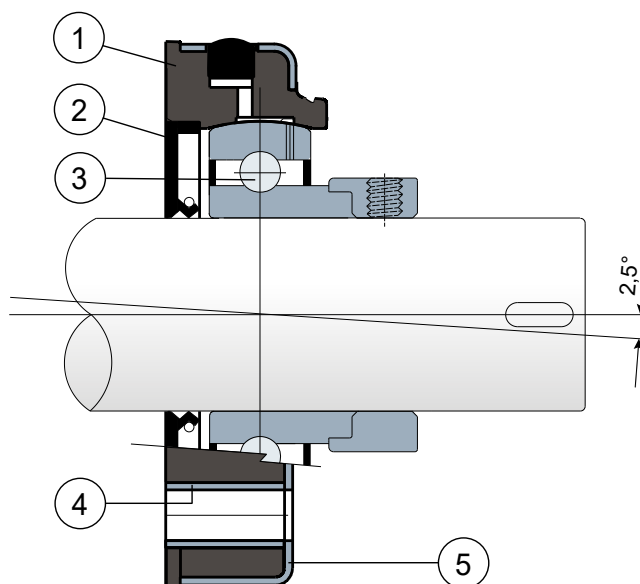

-  **1** - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2** - Back gasket made out of NBR rubber for turning shaft seal.
- 3** - Chrome steel bearing.
- 4** - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5** - External cover of support made out of AISI 304 stainless steel.

-  **1** - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2** - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3** - Cuscinetto in acciaio al cromo.
- 4** - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5** - Copertura esterna supporto in acciaio inox AISI 304.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

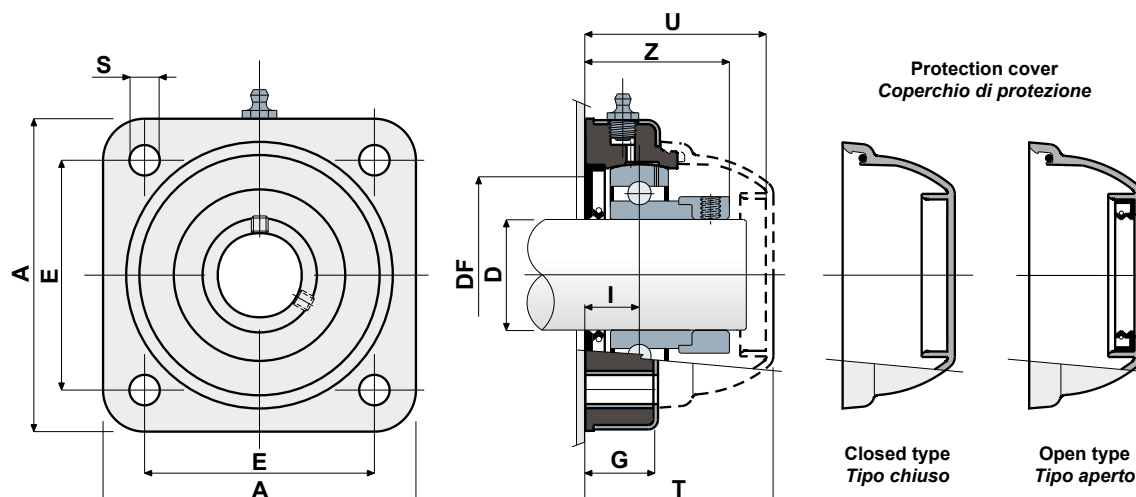

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/ Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
			E	A	S	G	I	Z	U	T	DF		C	C0	
		LONG LIFE BEARINGS									Max	Min			
30	SF/CXA 206 EC LL	CPC01167	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
35	SF/CXA 207 EC LL	CPC01168	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
40	SF/CXA 208 EC LL	CPC01169	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series SFF


Supporti a flangia quadra - Serie SFF



The bearing cover integrated into the body of the support guarantees maximum sanitation
La copertura del cuscinetto integrata nel corpo del supporto garantisce la massima sanificazione

Back gasket for shouldered shaft

Guarnizione posteriore per albero con spallamento

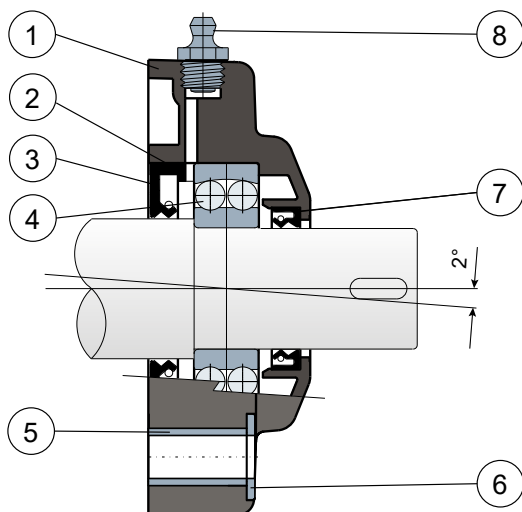


-  1 - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2 - Intermediate bearing ring spacer made out of black colour polyamide reinforced with glass fibers.
- 3 - Back gasket made out of NBR rubber for turning shaft seal.
- 4 - Chrome steel bearing type 1200 supplied without lubricant.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 6 - UNI 6592 support washer made out of stainless steel AISI 304.
- 7 - Front gasket made out of NBR rubber for turning shaft seal.
- 8 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules
Maximum shaft alignment error 2°

For further information please contact our technical office or sales department.

Mounting specifications

Specifiche di montaggio

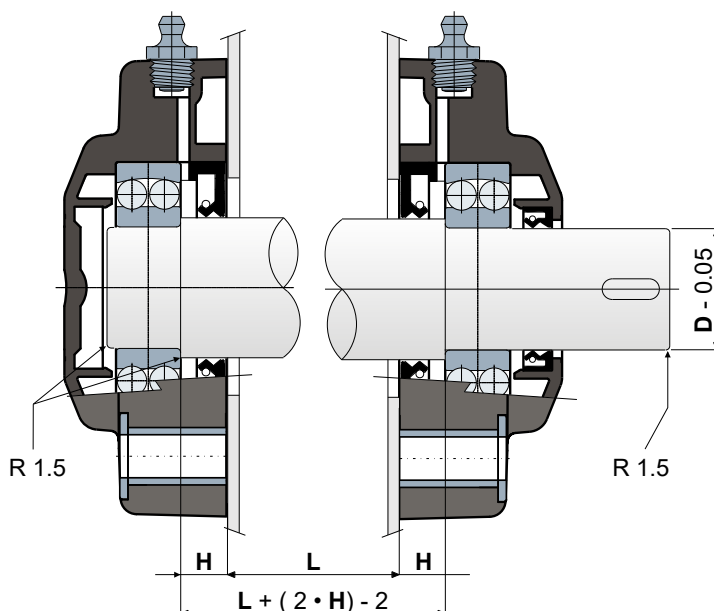


-  1 - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2 - Distanziale intermedio anello cuscinetto in poliammide di colore nero rinforzata con fibre di vetro.
- 3 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 4 - Cuscinetto in acciaio al cromo tipo 1200 fornito senza lubrificante.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 6 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 7 - Guarnizione anteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 8 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

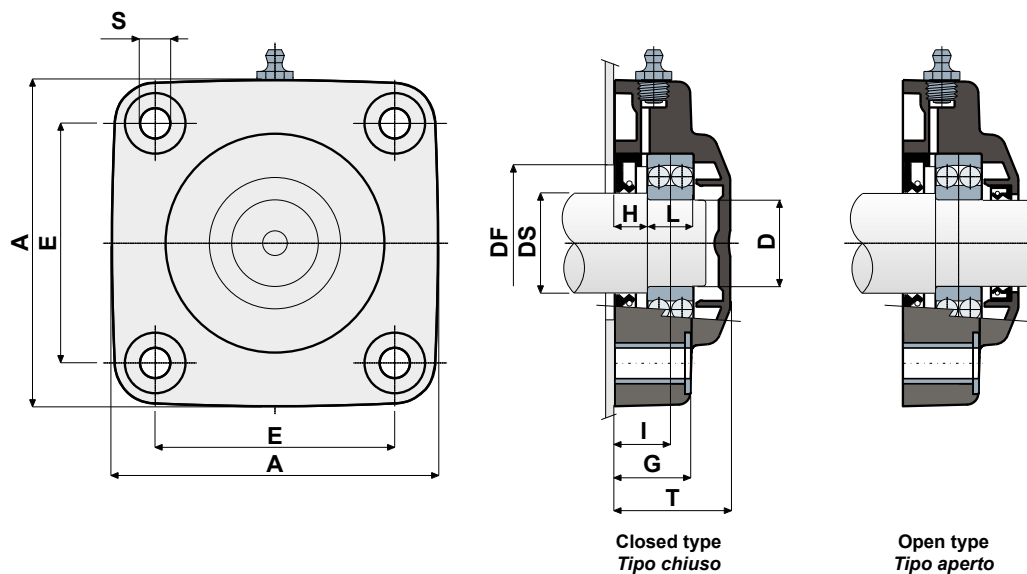


CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			BLACK CLOSED NERO CHIUSO	BLACK OPEN NERO APERTO	E	A	S	G	H	I	L	T	DF		C	C0	(N)
30	25	SFF 205	CPA00614	CPA00616	70	99	10,5	22	11	18,8	15	36,5	50	45	14300	4000	17250
35	30	SFF 206	CPA00615	CPA00617	83	113	10,5	26	11	19,3	16	40	60	50	15600	4650	17250
40	35	SFF 207	CPA00804	CPA00806	92	122,5	10,5	26	11	20	17	40,7	70	60	19000	6000	17250
45	40	SFF 208	CPA00805	CPA00807	102	133	10,5	26	14,5	23,5	18	46,2	78	65	19900	6950	18400

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO



DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			WHITE CLOSED BIANCO CHIUSO	WHITE OPEN BIANCO APERTO	E	A	S	G	H	I	L	T	DF		C	C0	(N)
30	25	SFF 205	CPA00619	CPA00621	70	99	10,5	22	11	18,8	15	36,5	50	45	14300	4000	17250
35	30	SFF 206	CPA00620	CPA00622	83	113	10,5	26	11	19,3	16	40	60	50	15600	4650	17250
40	35	SFF 207	CPA00808	CPA00810	92	122,5	10,5	26	11	20	17	40,7	70	60	19000	6000	17250
45	40	SFF 208	CPA00809	CPA00811	102	133	10,5	26	14,5	23,5	18	46,2	78	65	19900	6950	18400

Square flanged bearing supports - Series HSF/CX and HXF/CX
Supporti a flangia quadra con borchie - Serie HSF/CX e HXF/CX

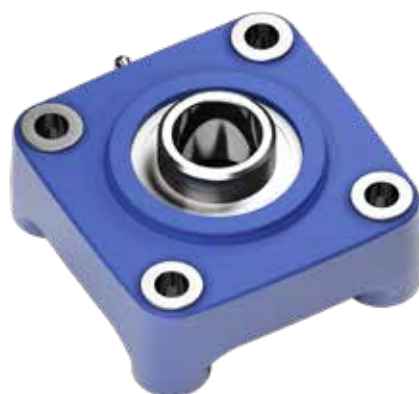

Without protection cover
Senza coperchio di protezione

Example of applications
Esempio di applicazione

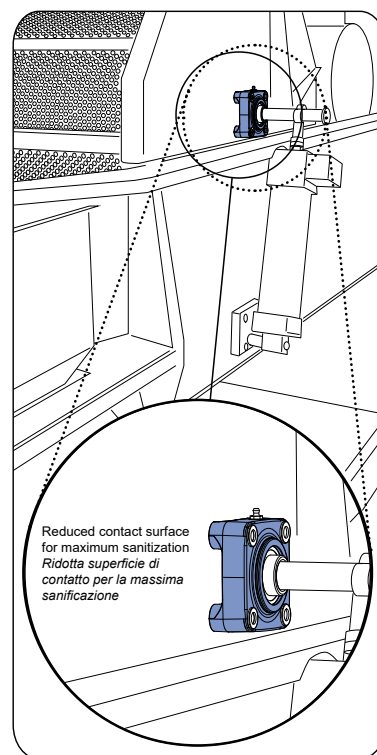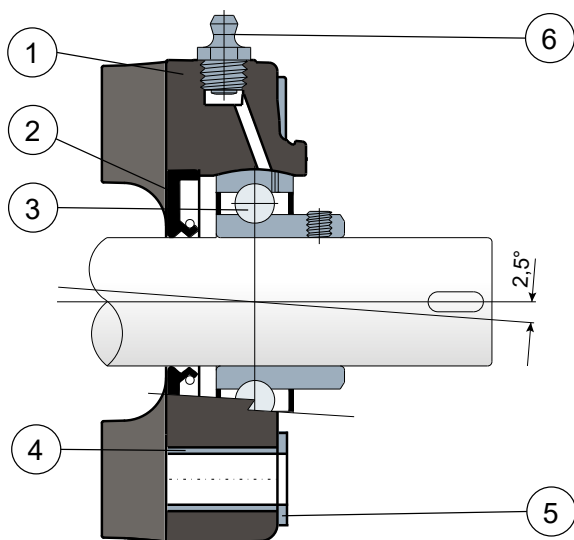

-  1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


-  1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

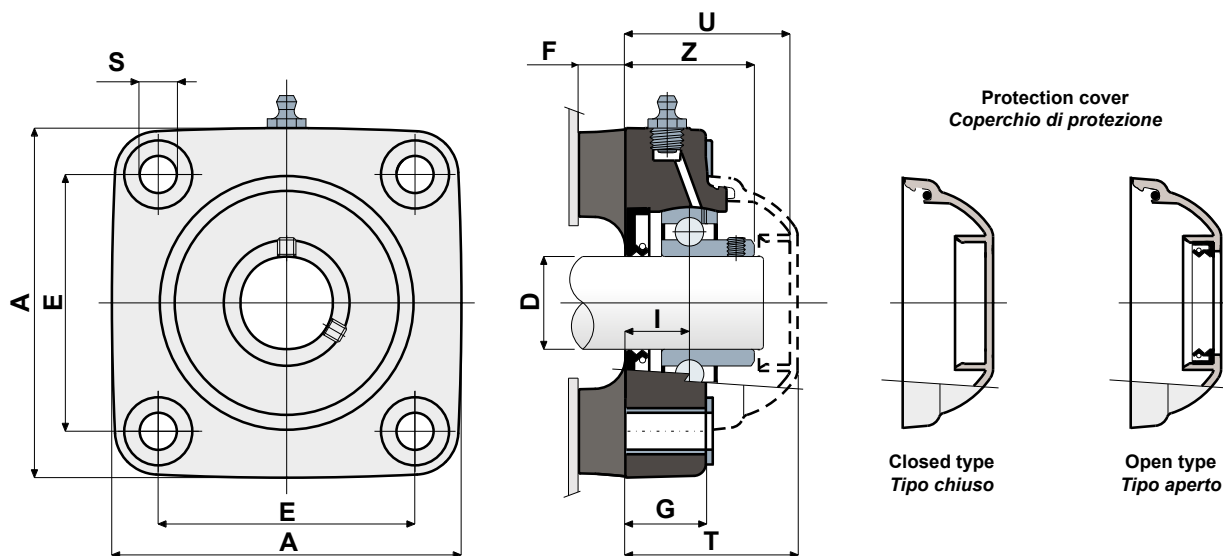

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO														
D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)									Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)
20	HSF/CX 204	CPC00001	63,5	90,5	10,5	15	19,2	15,5	33,8	44	46,5	12800	6600	16500
25	HSF/CX 205	CPC00833	70	99,5	10,5	15	22	17,4	36,9	47	49,5	14000	7800	17000
30	HSF/CX 206	CPC00834	83	113	10,5	15	26	20	41	53,2	55,7	19500	11300	17500
35	HSF/CX 207	CPC00002	92	122,5	10,5	15	26,3	20	43,2	56,5	59	25500	15300	18000
40	HSF/CX 208	CPC00003	102	133	10,5	15	26,3	19,5	44,8	65,5	68	32500	19800	18000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BEARING AISI 440 C / CUSCINETTO IN ACCIAIO INOX AISI 440														
D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)									Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)
20	HXF/CX 204	CPC00004	63,5	90,5	10,5	15	19,2	15,5	33,8	44	46,5	8300	6600	16500
25	HXF/CX 205	CPC00835	70	99,5	10,5	15	22	17,4	37	47	49,5	9150	7800	17000
30	HXF/CX 206	CPC00836	83	113	10,5	15	26	20	42	53,2	55,7	12500	11200	17500
35	HXF/CX 207	CPC00005	92	122,5	10,5	15	26,3	20	43,2	56,5	59	16600	15300	18000
40	HXF/CX 208	CPC00006	102	133	10,5	15	26,3	19,5	44,8	65,5	68	20000	19800	18000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042					BLUE/BLU RAL 5015				
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice		Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	
20	CF 204	CP002004	CF 204A	CP002014		CFB 204	CPA02004	CFB 204A	CPA02014	
25	CF 205	CP002005	CF 205A	CP002015		CFB 205	CPA02005	CFB 205A	CPA02015	
30	CF 206	CP002006	CF 206A	CP002016		CFB 206	CPA02006	CFB 206A	CPA02016	
35	CF 207	CP002007	CF 207A	CP002017		CFB 207	CPA02007	CFB 207A	CPA02018	
40	CF 206-7-8	CP002008	CF 208A	CP002018		CFB 206-7-8	CPA02008	CFB 208A	CPA02020	

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO														
D (inches)	SERIE	Support codes/Codici supporto	Dimensions/Dimensioni (mm)									Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)
1"	HSF/CX 205	CP001881	70	99,5	10,5	15	22	17,4	36,9	47	49,5	14000	7800	17000
1 1/4"	HSF/CX 206	CP001882	83	113	10,5	15	26	20	41	53,2	55,7	19500	11300	17500


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042					BLUE/BLU RAL 5015				
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice		Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	
1"	CF 205	CP002005	CF 205A M	CP002024		CFB 205	CPA02005	CFB 205A M	CPA02024	
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025		CFB 206	CPA02006	CFB 206A M3	CPA02025	





Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series HSF/CX EC
Supporti a flangia quadrata con borchie - Serie HSF/CX EC

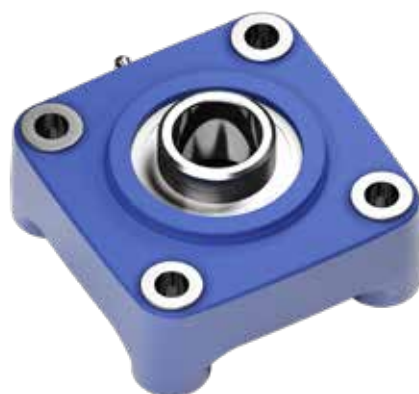

Without protection cover
Senza coperchio di protezione

Example of applications
Esempio di applicazione

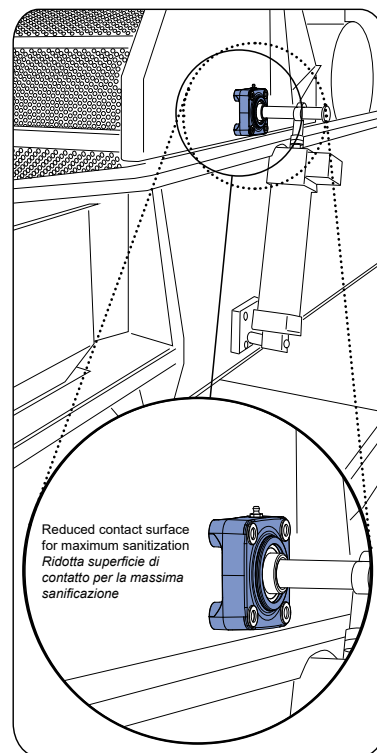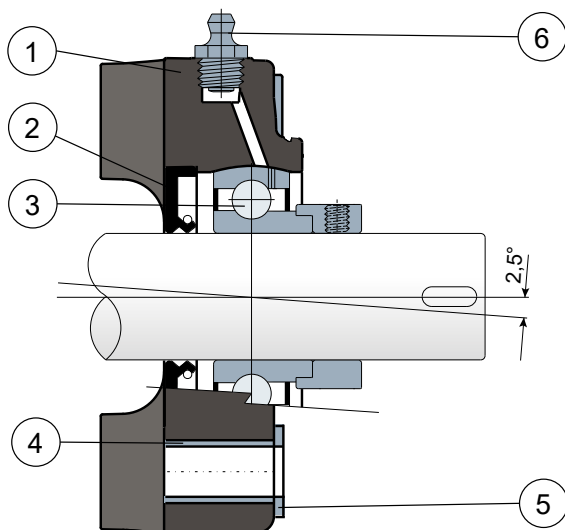


- 1** - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
2 - Back gasket made out of NBR rubber for turning shaft seal.
3 - Chrome steel bearing.
4 - UNI 6592 support washer made out of stainless steel AISI 304.
5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303.

- 1** - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
3 - Cuscinetto in acciaio al cromo.
4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303.

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

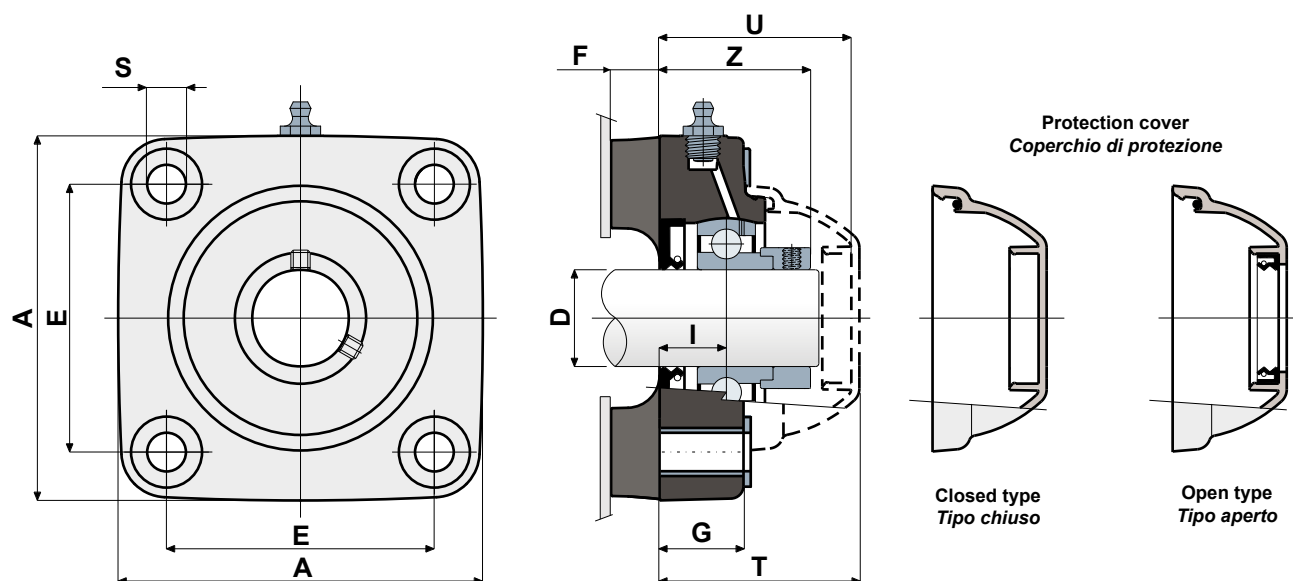

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)									Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)
20	HSF/CX 204 EC	CPC00007	63,5	90,5	10,5	15	19,2	15,5	33,8	44	46,5	12800	6600	16500
25	HSF/CX 205 EC	CPC00837	70	99,5	10,5	15	22	17,4	36,9	47	49,5	14000	7800	17000
30	HSF/CX 206 EC	CPC00838	83	113	10,5	15	26	20	41	53,2	55,7	19500	11300	17500
35	HSF/CX 207 EC	CPC00008	92	122,5	10,5	15	26,3	20	43,2	56,5	59	25500	15300	18000
40	HSF/CX 208 EC	CPC00009	102	133	10,5	15	26,3	19,5	44,8	65,5	68	32500	19800	18000


COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
25	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.


Square flanged bearing supports - Series HSF/CX LL
Supporti a flangia quadra con borchie - Serie HSF/CX LL

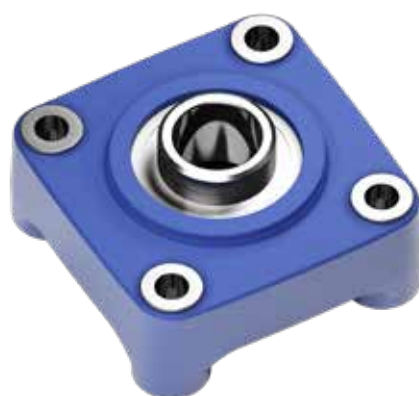

Without protection cover
Senza coperchio di protezione

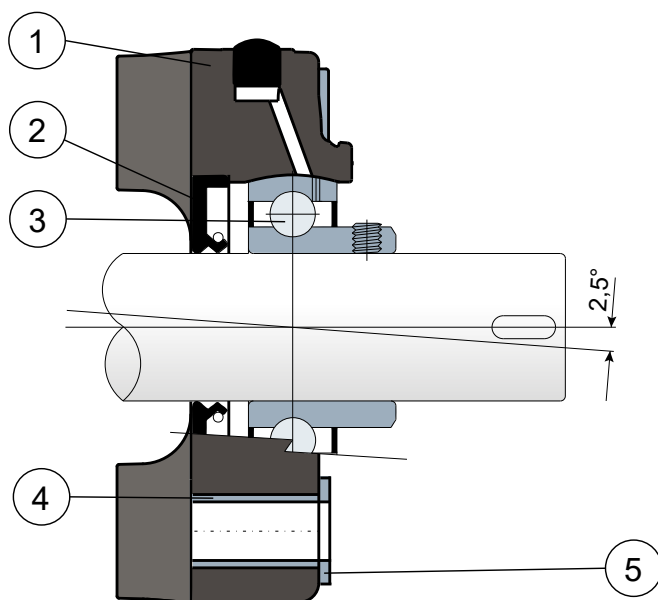

Example of applications
Esempio di applicazione

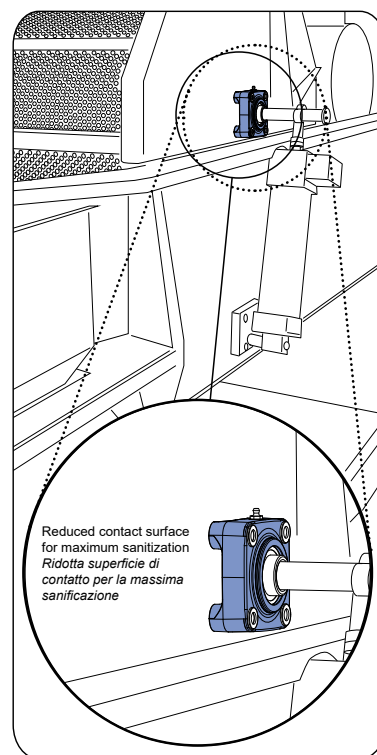

-  1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.

-  1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.


NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°
 For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
 Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

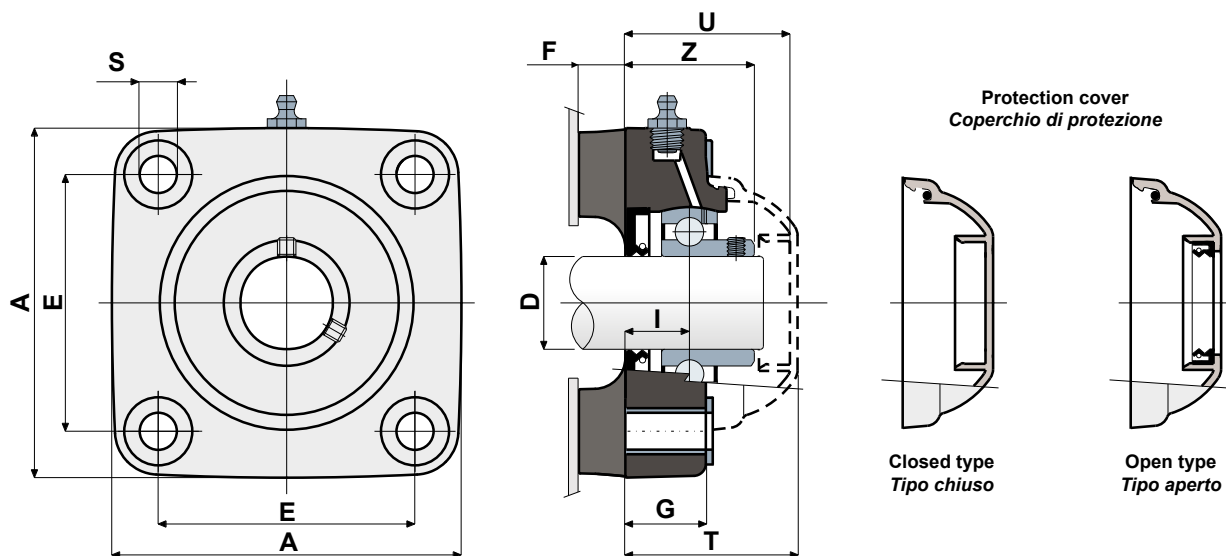

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)	
20	HSF/CX 204 LL	CPC00010	63,5	90,5	10,5	15	19,2	15,5	33,8	44	46,5	12800	6600	16500	
25	HSF/CX 205 LL	CPC01170	70	99,5	10,5	15	22	17,4	36,9	47	49,5	14000	7800	17000	
30	HSF/CX 206 LL	CPC01171	83	113	10,5	15	26	20	41	53,2	55,7	19500	11300	17500	
35	HSF/CX 207 LL	CPC00011	92	122,5	10,5	15	26,3	20	43,2	56,5	59	25500	15300	18000	
40	HSF/CX 208 LL	CPC00012	102	133	10,5	15	26,3	19,5	44,8	65,5	68	32500	19800	18000	

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)	
20	HXF/CX 204 LL	CPC00013	63,5	90,5	10,5	15	19,2	15,5	33,8	44	46,5	8300	6600	16500	
25	HXF/CX 205 LL	CPC01172	70	99,5	10,5	15	22	17,4	37	47	49,5	9150	7800	17000	
30	HXF/CX 206 LL	CPC01173	83	113	10,5	15	26	20	42	53,2	55,7	12500	11200	17500	
35	HXF/CX 207 LL	CPC00014	92	122,5	10,5	15	26,3	20	43,2	56,5	59	16600	15300	18000	
40	HXF/CX 208 LL	CPC00015	102	133	10,5	15	26,3	19,5	44,8	65,5	68	20000	19800	18000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)	
1"	HSF/CX 205 LL	CP001883	70	99,5	10,5	15	22	17,4	36,9	47	49,5	14000	7800	17000	
1 1/4"	HSF/CX 206 LL	CP001884	83	113	10,5	15	26	20	41	53,2	55,7	19500	11300	17500	


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025





Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Square flanged bearing supports - Series HSF/CX EC LL
Supporti a flangia quadra con borchie - Serie HSF/CX EC LL

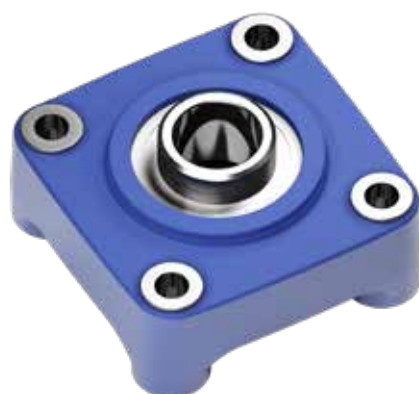

Without protection cover
Senza coperchio di protezione

Example of applications
Esempio di applicazione

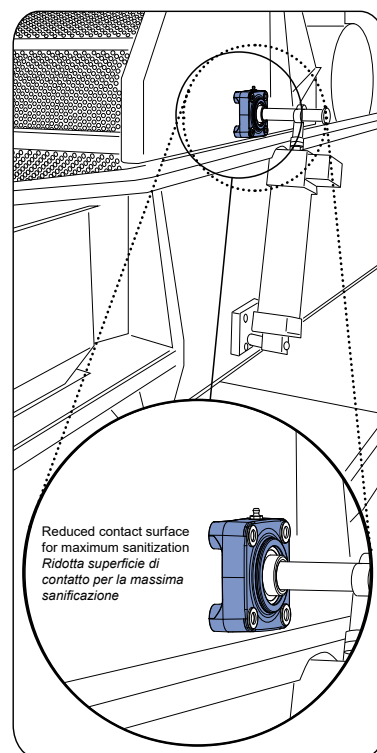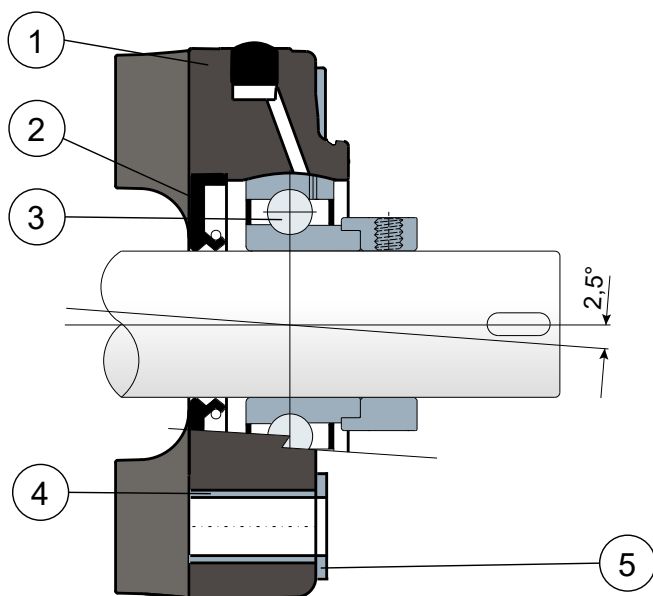


-  1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel bearing.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.

-  1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

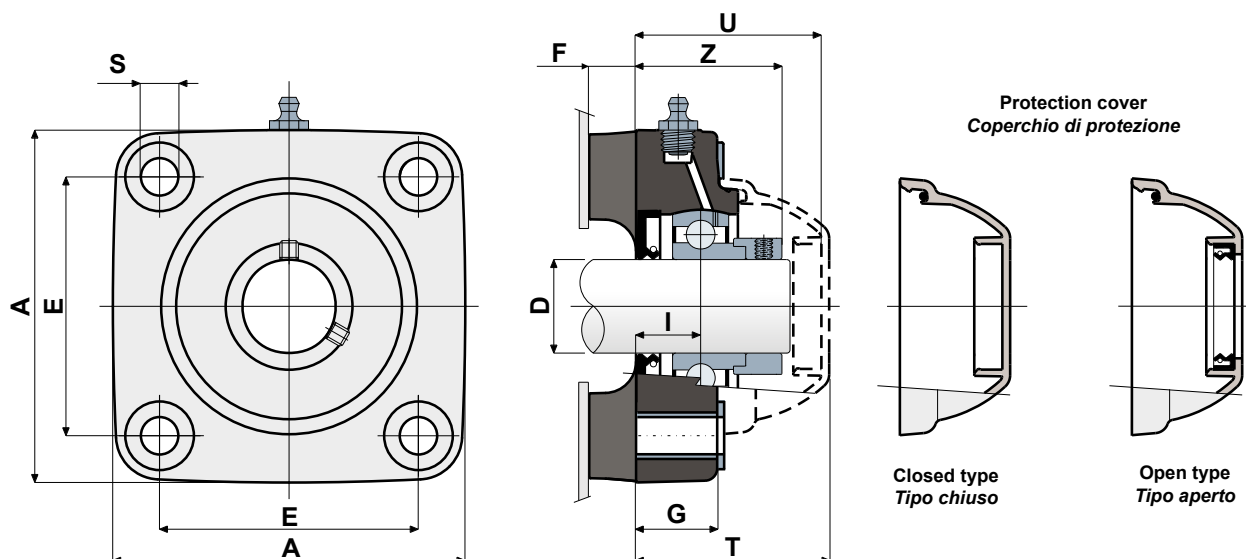

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	S	F	G	I	Z	U	T	C	C0	(N)	
20	HSF/CX 204 EC LL	CPC00016	63,5	90,5	10,5	15	19,2	15,5	33,8	44	46,5	12800	6600	16500	
25	HSF/CX 205 EC LL	CPC01174	70	99,5	10,5	15	22	17,4	36,9	47	49,5	14000	7800	17000	
30	HSF/CX 206 EC LL	CPC01175	83	113	10,5	15	26	20	41	53,2	55,7	19500	11300	17500	
35	HSF/CX 207 EC LL	CPC00017	92	122,5	10,5	15	26,3	20	43,2	56,5	59	25500	15300	18000	
40	HSF/CX 208 EC LL	CPC00018	102	133	10,5	15	26,3	19,5	44,8	65,5	68	32500	19800	18000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
25	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CX (SXL/CX) and MSFL/CX (MSXL/CX)
Supporti a flangia ovale - Serie SFL/CX (SXL/CX) e MSFL/CX (MSXL/CX)



Without protection cover / Senza coperchio di protezione

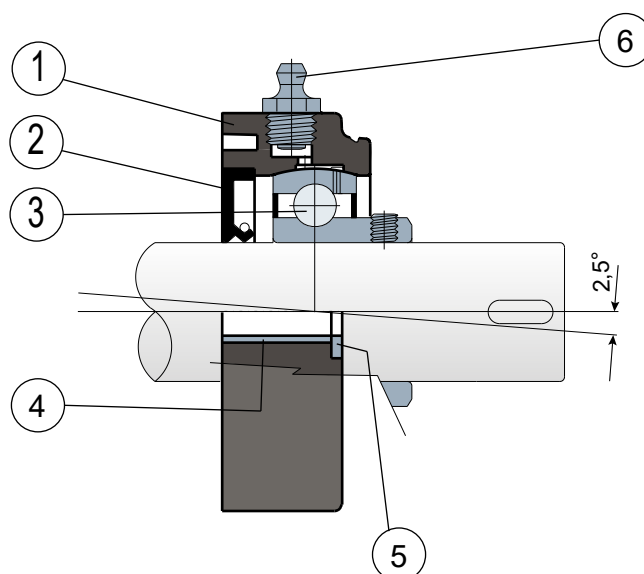

- | | |
|---|---|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel or stainless steel bearing AISI 440.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.</p> |
|---|---|

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

NOTE: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**


Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

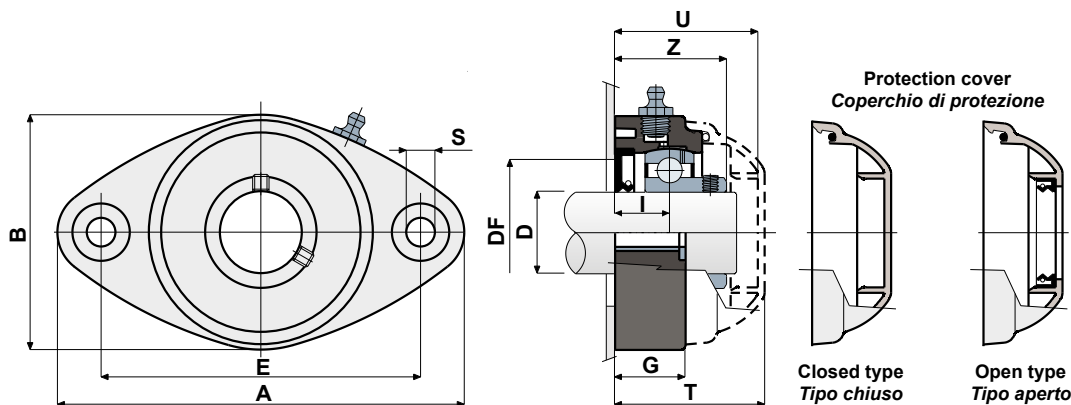

CHROME STEEL BEARING/CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	SFL/CX 204	CP000640	CPA00630	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSFL/CX 204	CP000672	CPA00631	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSFL/CX 204	CPA00624	CPA00632	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SFL/CX 205	CP000641	CPA00633	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSFL/CX 205	CP000673	CPA00634	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SFL/CX 206	CP000642	CPA00635	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSFL/CX 206	CP000674	CPA00636	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SFL/CX 207	CP000643	CPA00637	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSFL/CX 207	CPA00627	CPA00638	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SFL/CX 208	CPA00628	CPA00639	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSFL/CX 208	CPA00629	CPA00640	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	SXL/CX 204	CP000644	CPB00630	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSXL/CX 204	CP000675	CPB00631	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSXL/CX 204	CPB00624	CPB00632	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SXL/CX 205	CP000645	CPB00633	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSXL/CX 205	CP000676	CPB00634	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SXL/CX 206	CP000646	CPB00635	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSXL/CX 206	CP000677	CPB00636	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SXL/CX 207	CP000647	CPB00637	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSXL/CX 207	CPB00627	CPB00638	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SXL/CX 208	CPB00628	CPB00639	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSXL/CX 208	CPB00629	CPB00640	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

COVER CODES/CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206 M	CP002009	CF 206A M1	CP002020	CFB 206 M	CPA02009	CFB 206A M	CPA02021
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING/CUSCINETTO IN ACCIAIO AL CROMO

D (Inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
1"	SFL/CX 205	CPA00596	CPA00600	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
1"	MSFL/CX 205	CPA00597	CPA00601	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
1" 1/4	SFL/CX 206	CPA00598	CPA00604	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
1" 1/4	MSFL/CX 206	CPA00599	CPA00605	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000


COVER CODES/CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1" 1/4	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1" 1/4	CF 206 M	CP002009	CF 206A M2	CP002027	CFB 206 M	CPA02009	CFB 206A M1	CPA02027

Oval flanged bearing supports - Series SFL/CX EC and MSFL/CX EC
Supporti a flangia ovale - Serie SFL/CX EC e MSFL/CX EC



Without protection cover / Senza coperchio di protezione

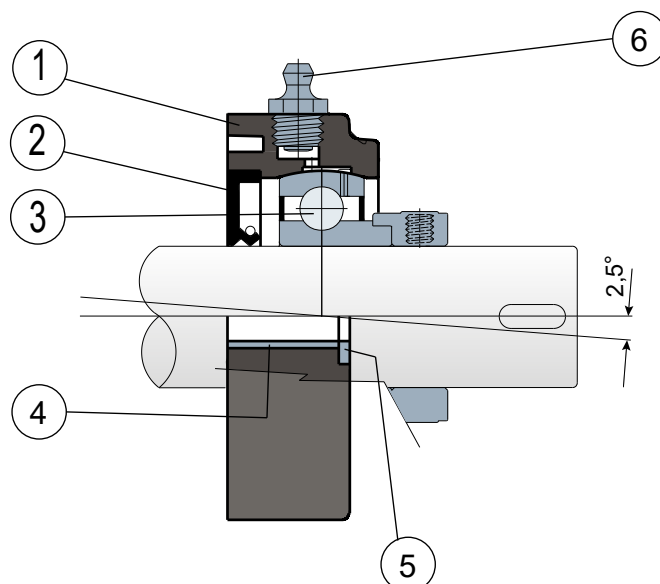

- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel bearing.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> <p>6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> <p>6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.</p> |
|---|--|

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

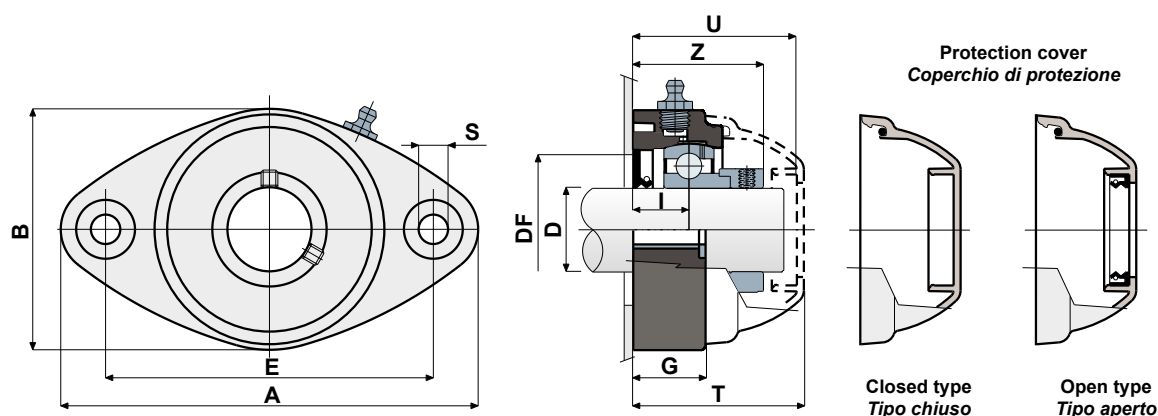

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																		
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
													Max	Min				
20	SFL/CX 204 EC	CPC00839	CPC00850	90	118	64	10,5	19	15,5	39	51	53,5	45	40	12800	6600	8500	
20	MSFL/CX 204 EC	CPC00840	CPC00851	90	112	86	10,5	19	16	39,5	51	53,5	45	40	12800	6600	8500	
S	20	MSFL/CX 204 EC	CPC00841	CPC00852	76,5	100	70	10,5	11	15,5	39	50,9	53,4	45	40	12800	6600	8500
	25	SFL/CX 205 EC	CPC00842	CPC00853	99	131	72	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	10000
25	MSFL/CX 205 EC	CPC00843	CPC00854	90	122	86	10,5	19	15,5	39	50	52,4	50	45	14000	7800	10000	
30	SFL/CX 206 EC	CPC00844	CPC00855	117	149	86	10,5	26	20	47,4	59,4	61,9	60	50	19500	11300	13000	
30	MSFL/CX 206 EC	CPC00845	CPC00856	90	122	86	10,5	19	13	39,7	52	54,5	60	50	19500	11300	13000	
35	SFL/CX 207 EC	CPC00846	CPC00857	130	163	94	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	14000	
35	MSFL/CX 207 EC	CPC00847	CPC00858	117	147	112	10,5	27	20	49,3	62	64,4	70	55	25500	15300	14000	
40	SFL/CX 208 EC	CPC00848	CPC00859	144	172	100	10,5	27	19,5	52,2	65	68	78	65	32500	19800	15000	
40	MSFL/CX 208 EC	CPC00849	CPC00860	117	147	112	10,5	27	19,5	52,2	65,5	68	78	65	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206 M EC	CP002033	CF 206A M EC	CP002039
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CX LL and MSFL/CX LL
Supporti a flangia ovale - Serie SFL/CX LL e MSFL/CX LL



Without protection cover / Senza coperchio di protezione

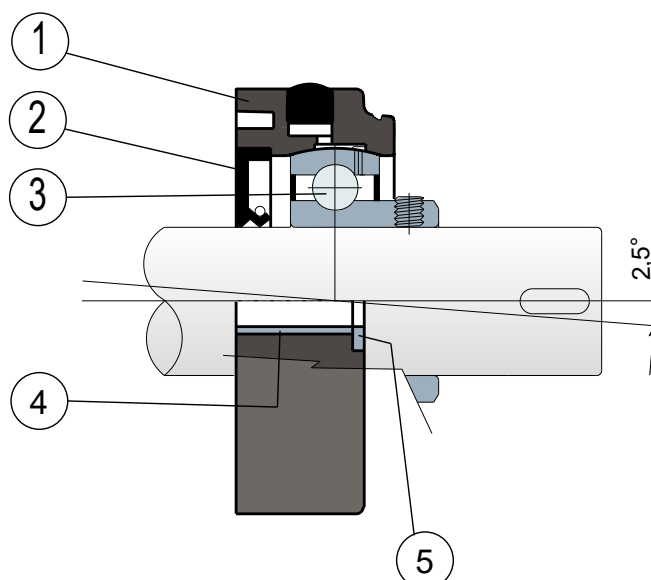

- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel or stainless steel bearing AISI 440.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> |
|---|--|

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


NOTE: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

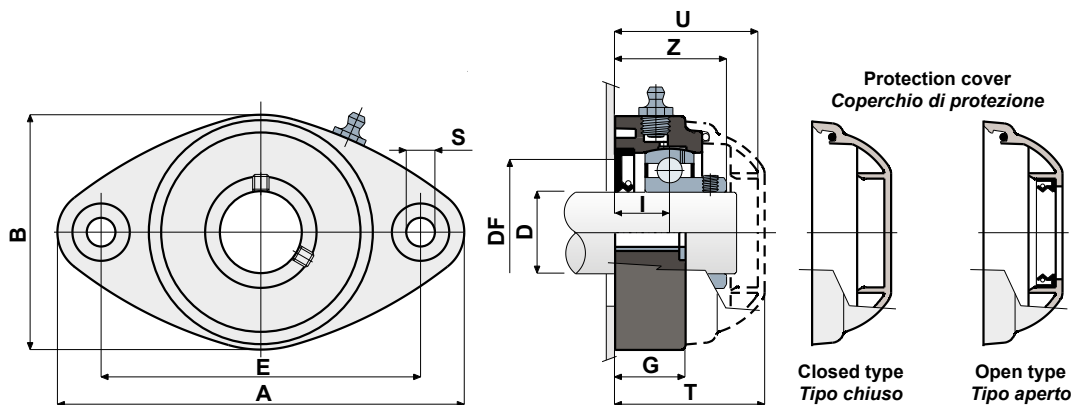

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS		E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
		BLACK NERO	WHITE BIANCO										Max	Min			
20	SFL/CX 204 LL	CPC01176	CPC01187	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSFL/CX 204 LL	CPC01177	CPC01188	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSFL/CX 204 LL	CPC01178	CPC01189	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SFL/CX 205 LL	CPC01179	CPC01190	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSFL/CX 205 LL	CPC01180	CPC01191	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SFL/CX 206 LL	CPC01181	CPC01192	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSFL/CX 206 LL	CPC01182	CPC01193	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SFL/CX 207 LL	CPC01183	CPC01194	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSFL/CX 207 LL	CPC01184	CPC01195	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SFL/CX 208 LL	CPC01185	CPC01196	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSFL/CX 208 LL	CPC01186	CPC01197	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS		E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
		BLACK NERO	WHITE BIANCO										Max	Min			
20	SXL/CX 204 LL	CPC01198	CPC01209	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSXL/CX 204 LL	CPC01199	CPC01210	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSXL/CX 204 LL	CPC01200	CPC01211	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SXL/CX 205 LL	CPC01201	CPC01212	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSXL/CX 205 LL	CPC01202	CPC01213	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SXL/CX 206 LL	CPC01203	CPC01214	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSXL/CX 206 LL	CPC01204	CPC01215	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SXL/CX 207 LL	CPC01205	CPC01216	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSXL/CX 207 LL	CPC01206	CPC01217	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SXL/CX 208 LL	CPC01207	CPC01218	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSXL/CX 208 LL	CPC01208	CPC01219	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206 M	CP002009	CF 206A M1	CP002020	CFB 206 M	CPA02009	CFB 206A M	CPA02021
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (Inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS		E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
		BLACK NERO	WHITE BIANCO										Max	Min			
1"	SFL/CX 205 LL	CPC01220	CPC01224	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
1"	MSFL/CX 205 LL	CPC01221	CPC01225	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
1" 1/4	SFL/CX 206 LL	CPC01222	CPC01226	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
1" 1/4	MSFL/CX 206 LL	CPC01223	CPC01227	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A	CP002024	CFB 205	CPA02005	CFB 205A	CPA02024
1"	CF 205	CP002005	CF 205A	CP002024	CFB 205	CPA02005	CFB 205A	CPA02024
1" 1/4	CF 206	CP002006	CF 206A	CP002025	CFB 206	CPA02006	CFB 206A	CPA02025
1" 1/4	CF 206 M	CP002009	CF 206A M2	CP002027	CFB 206 M	CPA02009	CFB 206A M1	CPA02027

Oval flanged bearing supports - Series SFL/CX EC LL
Supporti a flangia ovale - Serie SFL/CX EC LL



Without protection cover / Senza coperchio di protezione

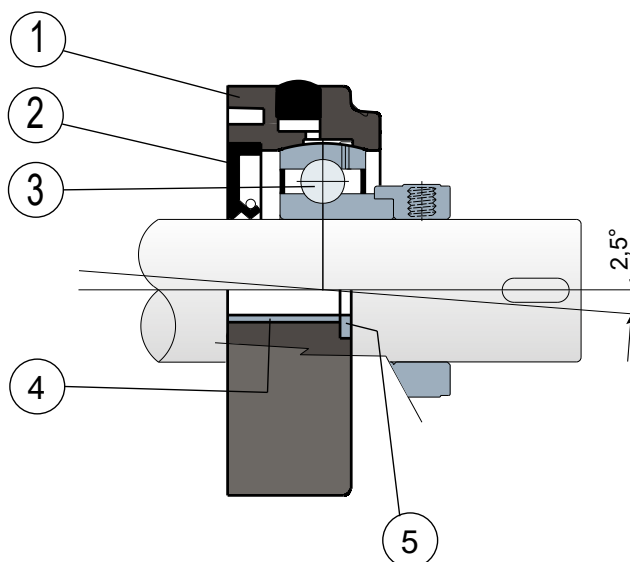


- | | |
|---|--|
| <p> 1 - Support body made out of black or white colour (on request BLUE RAL 5005) polyamide reinforced with glass fibers.</p> <p>2 - Back gasket made out of NBR rubber for turning shaft seal.</p> <p>3 - Chrome steel bearing.</p> <p>4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.</p> <p>5 - UNI 6592 support washer made out of stainless steel AISI 304.</p> | <p> 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta BLU RAL 5005) rinforzata con fibre di vetro.</p> <p>2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.</p> <p>3 - Cuscinetto in acciaio al cromo.</p> <p>4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.</p> <p>5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.</p> |
|---|--|

Support dimensions respect ISO 3228 set of rules.
 Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

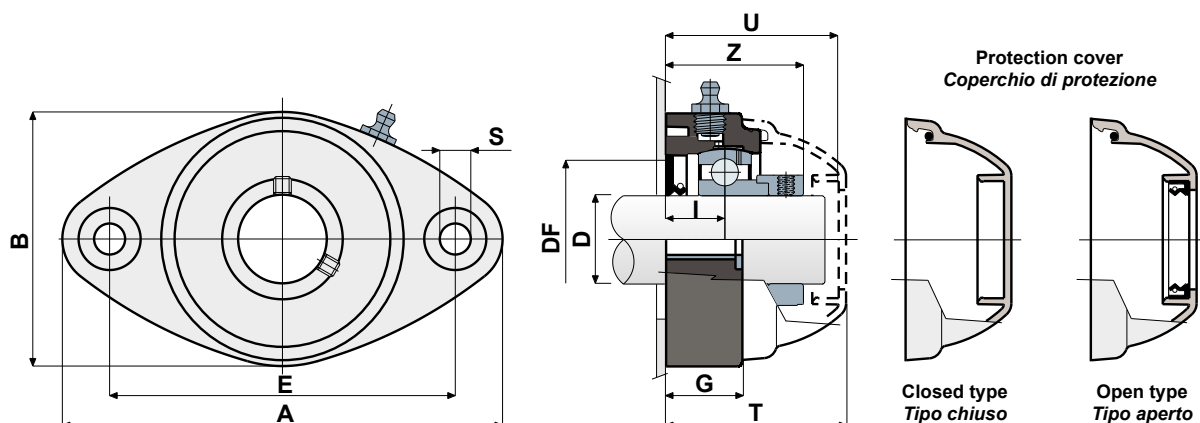

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																		
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
		LONG LIFE BEARINGS														C	C0	
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF Max Min					
20	SFL/CX 204 EC LL	CPB00715	CPB00726	90	118	64	10,5	19	15,5	39	51	53,5	45	40	12800	6600	8500	
20	MSFL/CX 204 EC LL	CPB00716	CPB00727	90	112	86	10,5	19	16	39,5	51	53,5	45	40	12800	6600	8500	
20	MSFL/CX 204 EC LL	CPB00717	CPB00728	76,5	100	70	10,5	11	15,5	39	50,9	53,4	45	40	12800	6600	8500	
25	SFL/CX 205 EC LL	CPB00718	CPB00729	99	131	72	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	10000	
25	MSFL/CX 205 EC LL	CPB00719	CPB00730	90	122	86	10,5	19	15,5	39	50	52,4	50	45	14000	7800	10000	
30	SFL/CX 206 EC LL	CPB00720	CPB00731	117	149	86	10,5	26	20	47,4	59,4	61,9	60	50	19500	11300	13000	
30	MSFL/CX 206 EC LL	CPB00721	CPB00732	90	122	86	10,5	19	13	39,7	52	54,5	60	50	19500	11300	13000	
35	SFL/CX 207 EC LL	CPB00722	CPB00733	130	163	94	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	14000	
35	MSFL/CX 207 EC LL	CPB00723	CPB00734	117	147	112	10,5	27	20	49,3	62	64,4	70	55	25500	15300	14000	
40	SFL/CX 208 EC LL	CPB00724	CPB00735	144	172	100	10,5	27	19,5	52,2	65	68	78	65	32500	19800	15000	
40	MSFL/CX 208 EC LL	CPB00725	CPB00736	117	147	112	10,5	27	19,5	52,2	65,5	68	78	65	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206 M EC	CP002033	CF 206A M EC	CP002039
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CX and MSFL/CX (SOLID)
Supporti a flangia ovale - Serie SFL/CX e MSFL/CX (SOLID)



Without protection cover / Senza coperchio di protezione

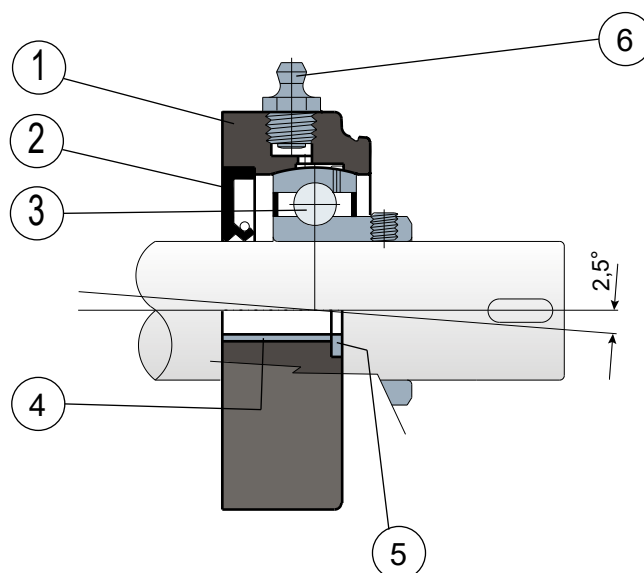

- 1** - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
2 - Back gasket made out of NBR rubber for turning shaft seal.
3 - Chrome steel or stainless steel bearing AISI 440.
4 - UNI 6592 support washer made out of stainless steel AISI 304.
5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303 (absent in the versions with LONG LIFE bearing).

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

- 1** - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303 (assente nelle versioni LONG LIFE).

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**


Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

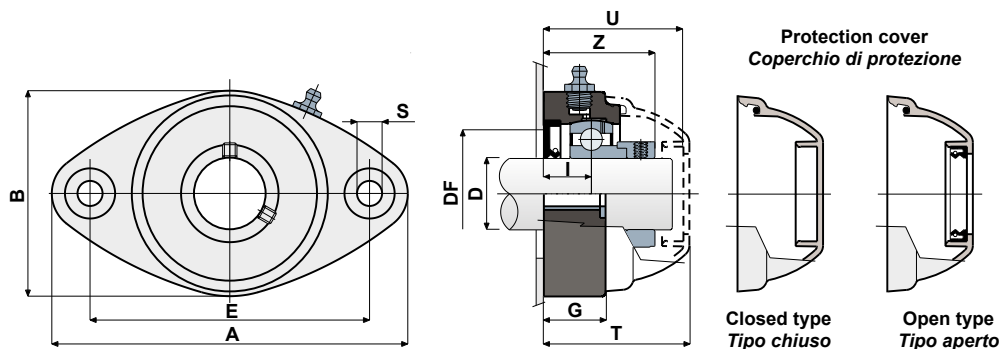

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005															
		Standard bearings	Long Life bearings	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
20	SFL/CX 204 SOLID	CPB00737	CPB00748	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSFL/CX 204 SOLID	CPB00738	CPB00749	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSFL/CX 204 SOLID	CPB00739	CPB00750	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SFL/CX 205 SOLID	CPB00740	CPB00751	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSFL/CX 205 SOLID	CPB00741	CPB00752	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SFL/CX 206 SOLID	CPB00742	CPB00753	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSFL/CX 206 SOLID	CPB00743	CPB00754	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SFL/CX 207 SOLID	CPB00744	CPB00755	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSFL/CX 207 SOLID	CPB00745	CPB00756	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SFL/CX 208 SOLID	CPB00746	CPB00757	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSFL/CX 208 SOLID	CPB00747	CPB00758	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005															
		Standard bearings	Long Life bearings	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
20	SXL/CX 204 SOLID	CPB00759	CPB00770	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSXL/CX 204 SOLID	CPB00760	CPB00771	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSXL/CX 204 SOLID	CPB00761	CPB00772	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SXL/CX 205 SOLID	CPB00762	CPB00773	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSXL/CX 205 SOLID	CPB00763	CPB00774	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SXL/CX 206 SOLID	CPB00764	CPB00775	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSXL/CX 206 SOLID	CPB00765	CPB00776	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SXL/CX 207 SOLID	CPB00766	CPB00777	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSXL/CX 207 SOLID	CPB00767	CPB00778	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SXL/CX 208 SOLID	CPB00768	CPB00779	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSXL/CX 208 SOLID	CPB00769	CPB00780	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206 M	CP002009	CF 206A M1	CP002020	CFB 206 M	CPA02009	CFB 206A M	CPA02021
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES / VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (Inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005															
		Standard bearings	Long Life bearings	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
1"	SFL/CX 205 SOLID	CPB00781	CPB00785	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
1"	MSFL/CX 205 SOLID	CPB00782	CPB00786	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
1" 1/4	SFL/CX 206 SOLID	CPB00783	CPB00787	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
1" 1/4	MSFL/CX 206 SOLID	CPB00784	CPB00788	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1" 1/4	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1" 1/4	CF 206 M	CP002009	CF 206A M2	CP002027	CFB 206 M	CPA02009	CFB 206A M1	CPA02027

Oval flanged bearing supports - Series SFL/CX EC and MSFL/CX EC (SOLID) Supporti a flangia ovale - Serie SFL/CX EC e MSFL/CX EC (SOLID)



Without protection cover / Senza coperchio di protezione

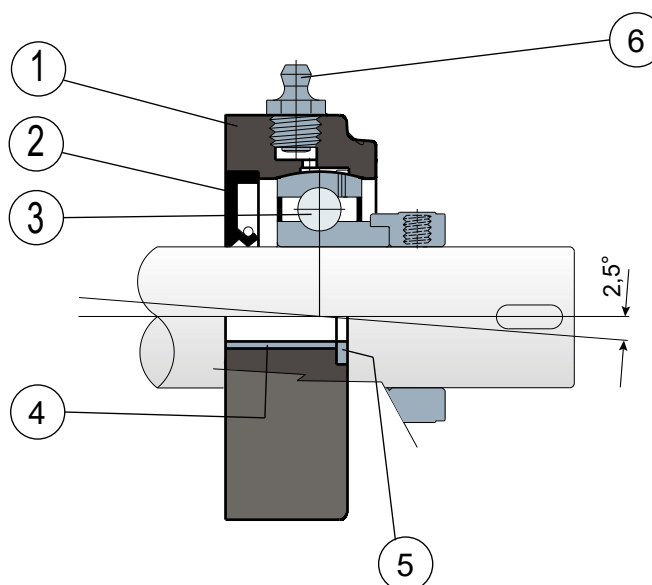


- 1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303 (absent in the versions with LONG LIFE bearing).

- 1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303 (assente nelle versioni LONG LIFE).

Support dimensions respect ISO 3228 set of rules
Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

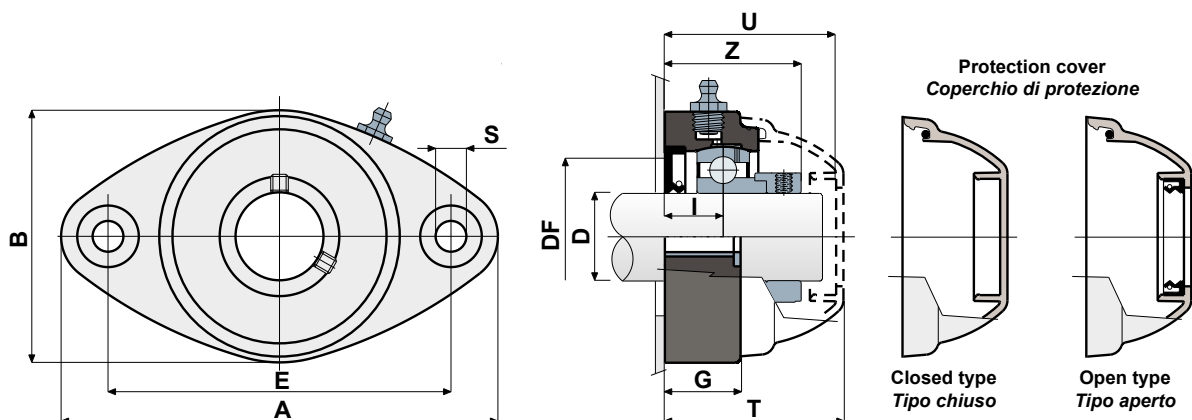

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005														C	C0	(N)
		Standard bearings	Long Life bearings	E	A	B	S	G	I	Z	U	T	DF					
													Max	Min				
20	SFL/CX 204 EC SOLID	CPB00789	CPB00800	90	118	64	10,5	19	15,5	39	51	53,5	45	40	12800	6600	8500	
20	MSFL/CX 204 EC SOLID	CPB00790	CPB00801	90	112	86	10,5	19	16	39,5	51	53,5	45	40	12800	6600	8500	
20	MSFL/CX 204 EC SOLID	CPB00791	CPB00802	76,5	100	70	10,5	11	15,5	39	50,9	53,4	45	40	12800	6600	8500	
25	SFL/CX 205 EC SOLID	CPB00792	CPB00803	99	131	72	10,5	22	17,4	40,9	52,9	55,4	50	45	14000	7800	10000	
25	MSFL/CX 205 EC SOLID	CPB00793	CPB00804	90	122	86	10,5	19	15,5	39	50	52,4	50	45	14000	7800	10000	
30	SFL/CX 206 EC SOLID	CPB00794	CPB00805	117	149	86	10,5	26	20	47,4	59,4	61,9	60	50	19500	11300	13000	
30	MSFL/CX 206 EC SOLID	CPB00795	CPB00806	90	122	86	10,5	19	13	39,7	52	54,5	60	50	19500	11300	13000	
35	SFL/CX 207 EC SOLID	CPB00796	CPB00807	130	163	94	10,5	26	20	49,3	61,3	63,8	70	55	25500	15300	14000	
35	MSFL/CX 207 EC SOLID	CPB00797	CPB00808	117	147	112	10,5	27	20	49,3	62	64,4	70	55	25500	15300	14000	
40	SFL/CX 208 EC SOLID	CPB00798	CPB00809	144	172	100	10,5	27	19,5	52,2	65	68	78	65	32500	19800	15000	
40	MSFL/CX 208 EC SOLID	CPB00799	CPB00810	117	147	112	10,5	27	19,5	52,2	65,5	68	78	65	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206 M EC	CP002033	CF 206A M EC	CP002039
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL (SXL) and MSFL (MSXL) Supporti a flangia ovale - Serie SFL (SXL) e MSFL (MSXL)



Without cover and back gasket / Senza coperchio e guarnizione posteriore

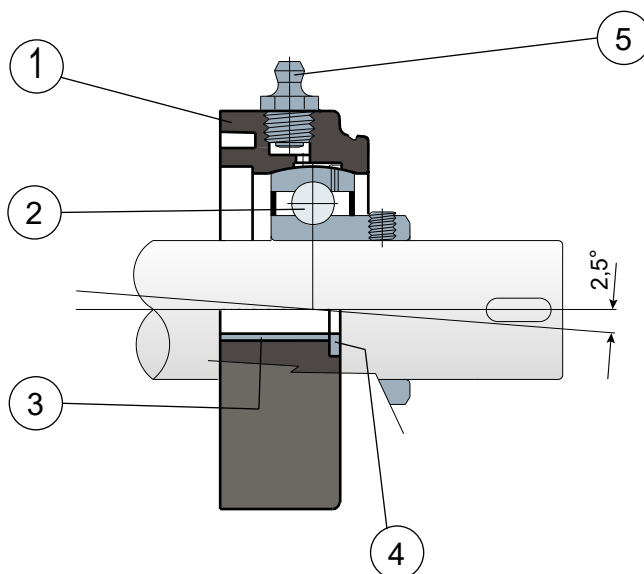

- 1 - Support body made out of black or white colour (on request **BLUE RAL 5005**) polyamide reinforced with glass fibers.
- 2 - Chrome steel or stainless steel bearing AISI 440.
- 3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

- 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta **BLU RAL 5005**) rinforzata con fibre di vetro.
- 2 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**


Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

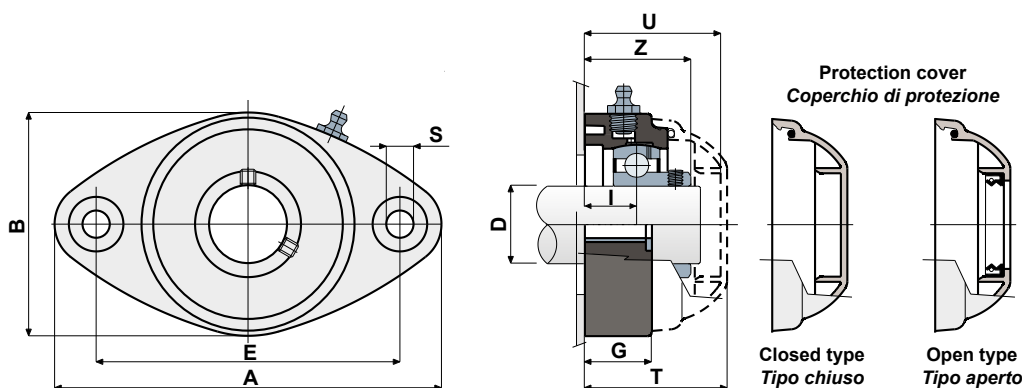

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	SFL 204	CP000648	CPB00641	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSFL 204	CP000678	CPB00642	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSFL 204	CPA00642	CPB00643	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SFL 205	CP000649	CPB00644	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSFL 205	CP000679	CPB00645	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SFL 206	CP000650	CPB00646	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSFL 206	CP000680	CPB00647	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SFL 207	CP000651	CPB00648	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSFL 207	CPA00645	CPB00649	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SFL 208	CPA00646	CPB00650	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSFL 208	CPA00647	CPB00651	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
20	SXL 204	CP000652	CPB00652	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MSXL 204	CP000681	CPB00653	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MSXL 204	CPA00649	CPB00654	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	SXL 205	CP000653	CPC00623	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MSXL 205	CP000682	CPC00624	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	SXL 206	CP000654	CPC00625	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MSXL 206	CP000683	CPC00626	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	SXL 207	CP000655	CPC00627	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MSXL 207	CPA00652	CPC00628	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	SXL 208	CPA00653	CPC00629	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSXL 208	CPA00654	CPC00630	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206 M	CP002009	CF 206A M1	CP002020	CFB 206 M	CPA02009	CFB 206A M	CPA02021
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (Inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
													Max	Min			
1"	SFL 205	CPC00631	CPC00635	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
1"	MSFL 205	CPC00632	CPC00636	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
1" 1/4	SFL 206	CPC00633	CPC00637	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
1" 1/4	MSFL 206	CPC00634	CPC00638	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1" 1/4	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1" 1/4	CF 206 M	CP002009	CF 206A M2	CP002027	CFB 206 M	CPA02009	CFB 206A M1	CPA02027

Oval flanged bearing supports - Series SFL EC and MSFL EC Supporti a flangia ovale - Serie SFL EC e MSFL EC



Without cover and back gasket / Senza coperchio e guarnizione posteriore

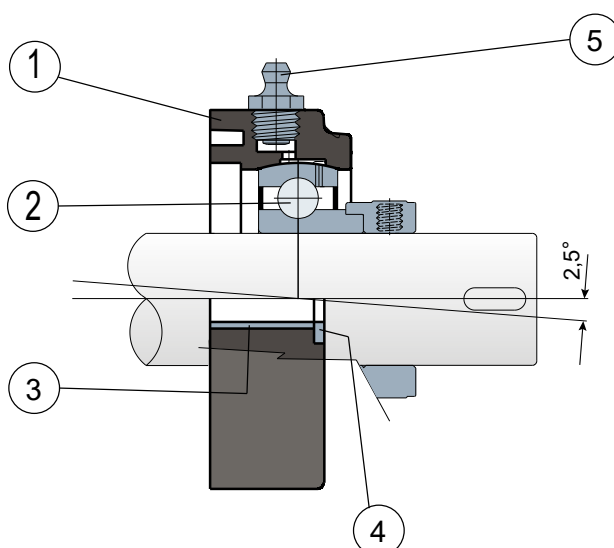

- 1 - Support body made out of black or white colour (on request **BLUE RAL 5005**) polyamide reinforced with glass fibers.
- 2 - Chrome steel bearing.
- 3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.


- 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta **BLU RAL 5005**) rinforzata con fibre di vetro.
- 2 - Cuscinetto in acciaio al cromo.
- 3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

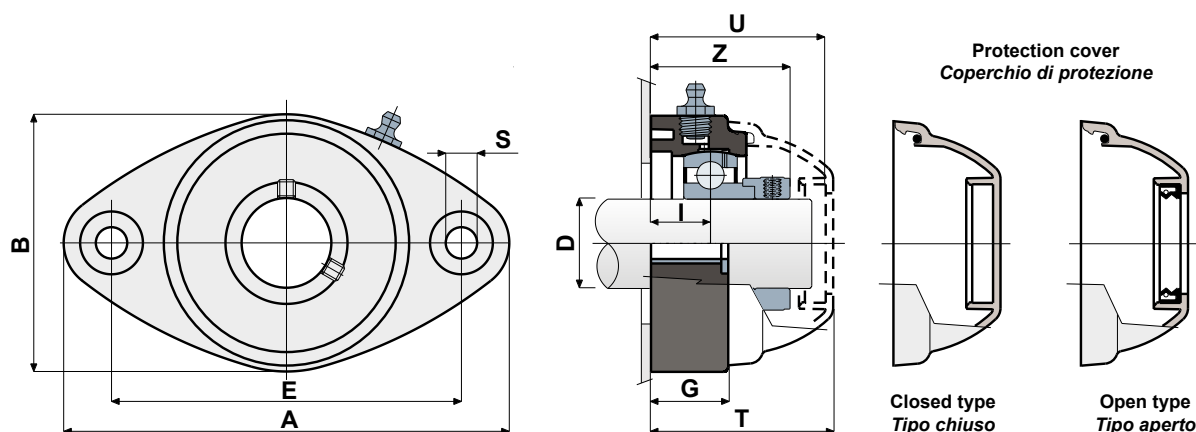

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)									Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto (N)
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	C	C0	(N)
20	SFL 204 EC	CPC00861	CPC00872	90	118	64	10,5	19	15,5	39	51	53,5	12800	6600	8500
20	MSFL 204 EC	CPC00862	CPC00873	90	112	86	10,5	19	16	39,5	51	53,5	12800	6600	8500
20	MSFL 204 EC	CPC00863	CPC00874	76,5	100	70	10,5	11	15,5	39	50,9	53,4	12800	6600	8500
25	SFL 205 EC	CPC00864	CPC00875	99	131	72	10,5	22	17,4	40,9	52,9	55,4	14000	7800	10000
25	MSFL 205 EC	CPC00865	CPC00876	90	122	86	10,5	19	15,5	39	50	52,4	14000	7800	10000
30	SFL 206 EC	CPC00866	CPC00877	117	149	86	10,5	26	20	47,4	59,4	61,9	19500	11300	13000
30	MSFL 206 EC	CPC00867	CPC00878	90	122	86	10,5	19	13	39,7	52	54,5	19500	11300	13000
35	SFL 207 EC	CPC00868	CPC00879	130	163	94	10,5	26	20	49,3	61,3	63,8	25500	15300	14000
35	MSFL 207 EC	CPC00869	CPC00880	117	147	112	10,5	27	20	49,3	62	64,4	25500	15300	14000
40	SFL 208 EC	CPC00870	CPC00881	144	172	100	10,5	27	19,5	52,2	65	68	32500	19800	15000
40	MSFL 208 EC	CPC00871	CPC00882	117	147	112	10,5	27	19,5	52,2	65,5	68	32500	19800	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206 M EC	CP002033	CF 206A M EC	CP002039
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL LL and MSFL LL Supporti a flangia ovale - Serie SFL LL e MSFL LL



Without cover and back gasket / Senza coperchio e guarnizione posteriore

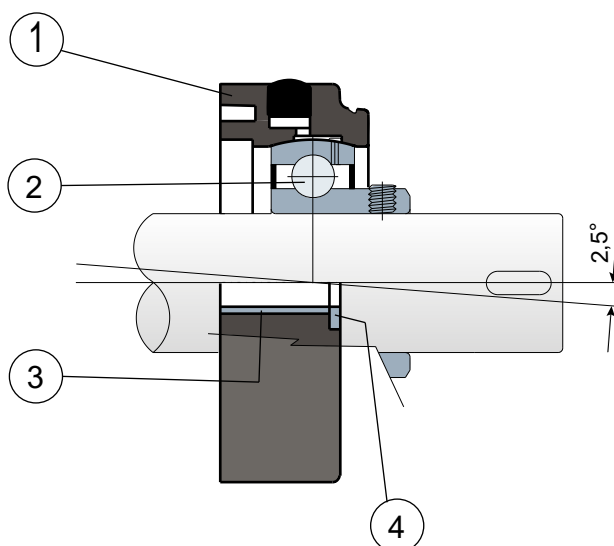

- 1 - Support body made out of black or white colour (on request **BLUE RAL 5005**) polyamide reinforced with glass fibers.
- 2 - Chrome steel or stainless steel bearing AISI 440.
- 3 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.

- 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta **BLU RAL 5005**) rinforzata con fibre di vetro.
- 2 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 3 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

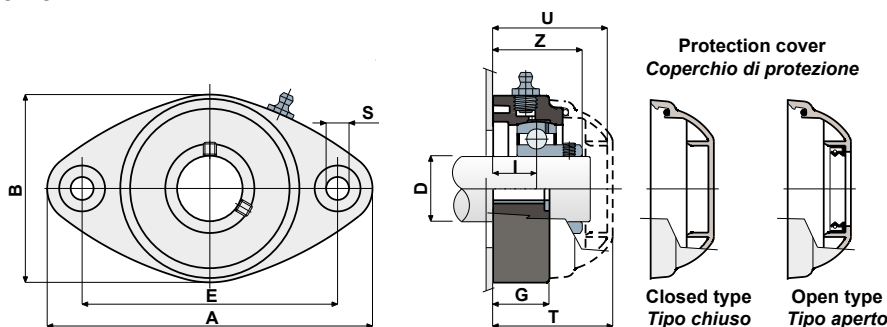

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																		
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS		E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
		BLACK NERO	WHITE BIANCO										Max	Min				
S	20	SFL 204 LL	CPB00811	CPB00822	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
	20	MSFL 204 LL	CPB00812	CPB00823	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
	20	MSFL 204 LL	CPB00813	CPB00824	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
	25	SFL 205 LL	CPB00814	CPB00825	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
	25	MSFL 205 LL	CPB00815	CPB00826	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
	30	SFL 206 LL	CPB00816	CPB00827	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
	30	MSFL 206 LL	CPB00817	CPB00828	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
	35	SFL 207 LL	CPB00818	CPB00829	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
	35	MSFL 207 LL	CPB00819	CPB00830	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
	40	SFL 208 LL	CPB00820	CPB00831	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSFL 208	CPB00821	CPB00832	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000	

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BEARING AISI 440 C USCINETTO IN ACCIAIO INOX AISI 440																		
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS		E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
		BLACK NERO	WHITE BIANCO										Max	Min				
S	20	SXL 204 LL	CPB00833	CPB00844	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
	20	MSXL 204 LL	CPB00834	CPB00845	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
	20	MSXL 204 LL	CPB00835	CPB00846	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
	25	SXL 205 LL	CPB00836	CPB00847	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
	25	MSXL 205 LL	CPB00837	CPB00848	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
	30	SXL 206 LL	CPB00838	CPB00849	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
	30	MSXL 206 LL	CPB00839	CPB00850	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
	35	SXL 207 LL	CPB00840	CPB00851	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
	35	MSXL 207 LL	CPB00841	CPB00852	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
	40	SXL 208 LL	CPB00842	CPB00853	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MSXL 208 LL	CPB00843	CPB00854	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
30	CF 206 M	CP002009	CF 206A M1	CP002020	CFB 206 M	CPA02009	CFB 206A M	CPA02021
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																		
D (Inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS																
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
													Max	Min				
1"	SFL 205 LL	CPB00855	CPB00859	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	
1"	MSFL 205 LL	CPB00856	CPB00860	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000	
1" 1/4	SFL 206 LL	CPB00857	CPB00861	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	
1" 1/4	MSFL 206 LL	CPB00858	CPB00862	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000	

COVER CODES / CODICI COPERCHIO


D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1" 1/4	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025
1" 1/4	CF 206 M	CP002009	CF 206A M2	CP002027	CFB 206 M	CPA02009	CFB 206A M1	CPA02027

Oval flanged bearing supports - Series SFL EC LL and MSFL EC LL

Supporti a flangia ovale - Serie SFL EC LL e MSFL EC LL



Without cover and back gasket / Senza coperchio e guarnizione posteriore

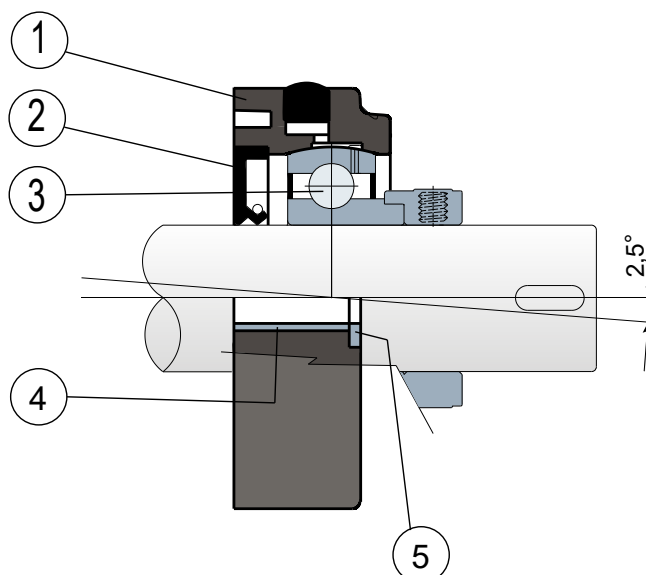

- 1 - Support body made out of black or white colour (on request **BLUE RAL 5005**) polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel bearing.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - UNI 6592 support washer made out of stainless steel AISI 304.

- 1 - Corpo esterno supporto in poliammide di colore nero o bianco (a richiesta **BLU RAL 5005**) rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.


Support dimensions respect ISO 3228 set of rules.
Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

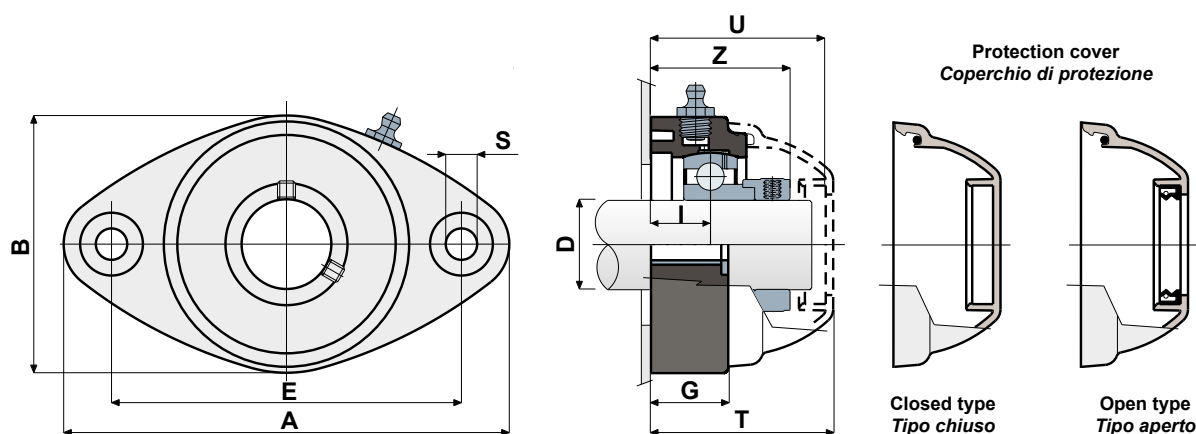

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)									Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		BLACK NERO	WHITE BIANCO	E	A	B	S	G	I	Z	U	T	C	C0	(N)
20	SFL 204 EC LL	CPB00863	CPB00874	90	118	64	10,5	19	15,5	39	51	53,5	12800	6600	8500
20	MSFL 204 EC LL	CPB00864	CPB00875	90	112	86	10,5	19	16	39,5	51	53,5	12800	6600	8500
20	MSFL 204 EC LL	CPB00865	CPB00876	76,5	100	70	10,5	11	15,5	39	50,9	53,4	12800	6600	8500
25	SFL 205 EC LL	CPB00866	CPB00877	99	131	72	10,5	22	17,4	40,9	52,9	55,4	14000	7800	10000
25	MSFL 205 EC LL	CPB00867	CPB00878	90	122	86	10,5	19	15,5	39	50	52,4	14000	7800	10000
30	SFL 206 EC LL	CPB00868	CPB00879	117	149	86	10,5	26	20	47,4	59,4	61,9	19500	11300	13000
30	MSFL 206 EC LL	CPB00869	CPB00880	90	122	86	10,5	19	13	39,7	52	54,5	19500	11300	13000
35	SFL 207 EC LL	CPB00870	CPB00881	130	163	94	10,5	26	20	49,3	61,3	63,8	25500	15300	14000
35	MSFL 207 EC LL	CPB00871	CPB00882	117	147	112	10,5	27	20	49,3	62	64,4	25500	15300	14000
40	SFL 208 EC LL	CPB00872	CPB00883	144	172	100	10,5	27	19,5	52,2	65	68	32500	19800	15000
40	MSFL 208 EC LL	CPB00873	CPB00884	117	147	112	10,5	27	19,5	52,2	65,5	68	32500	19800	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
30	CF 206 M EC	CP002033	CF 206A M EC	CP002039
35	CF 207 EC	CP002032	CF 207A EC	CP002038
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CS (SXL/CS) and MSFL/CS (MSXL/CS)
Supporti a flangia ovale - Serie SFL/CS (SXL/CS) e MSFL/CS (MSXL/CS)



Back gasket for shouldered shaft/Guarnizione posteriore per albero con spallamento

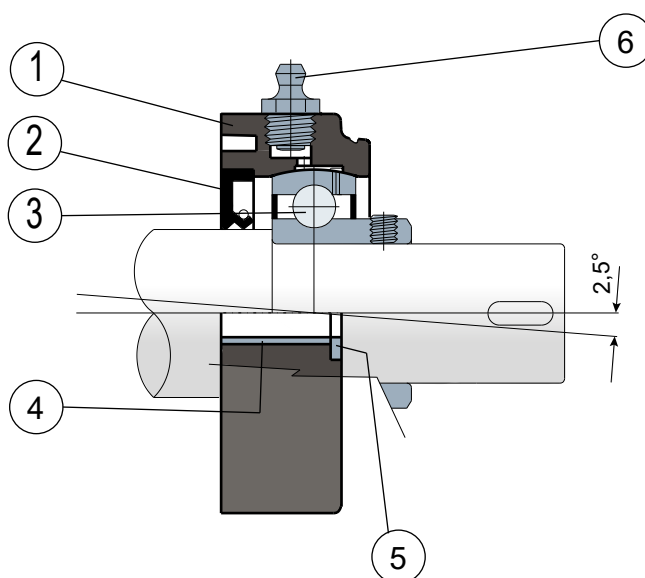

-  1 - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - UNI 6592 support washer made out of stainless steel AISI 304.
- 6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


-  1 - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

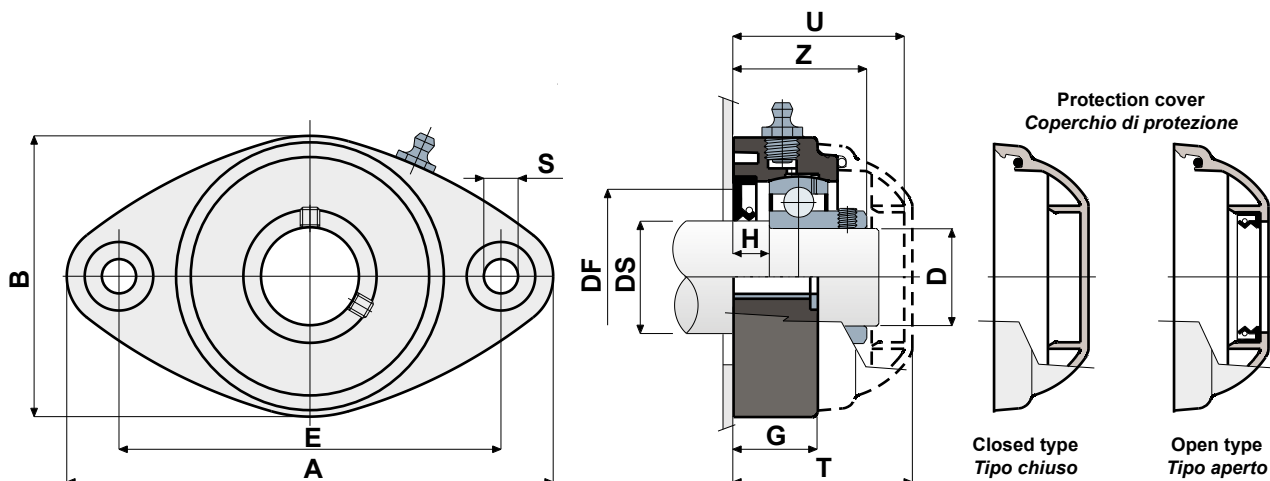

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																			
DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing sup- port load Carico supporto (N)
					BLACK NERO	WHITE BIANCO	E	A	B	S	G	H	Z	U	T	DF		C	
			Max	Min															
	25	20	SFL/CS 204	CP000656	CPB00657	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500
S	25	20	MSFL/CS 204	CPA00656	CPB00658	76,5	100	70	10,5	11	8,5	33,5	44	46,5	45	40	12800	6600	8500
	30	25	SFL/CS 205	CP000657	CPB00659	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000
	35	30	SFL/CS 206	CP000658	CPB00660	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000
	40	35	SFL/CS 207	CP000659	CPB00661	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000
	45	40	SFL/CS 208	CPA00657	CPB00662	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BALL BEARING A618 1407 CUSCINETTO IN ACCIAIO INOX A618 1416																			
DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing sup- port load Carico supporto
			BLACK NERO	WHITE BIANCO	E	A	B	S	G	H	Z	U	T	DF		C	C0	(N)	
														Max	Min				
	25	20	SXL/CS 204	CPC00639	CPC00645	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	8300	6600	8500
	25	20	MSXL/CS 204	CPC00640	CPC00646	76,5	100	70	10,5	11	8,5	33,5	44	46,5	45	40	8300	6600	8500
	30	25	SXL/CS 205	CPC00641	CPC00647	99	131	72	10,5	22	10	36	47	49	50	45	9150	7800	10000
	35	30	SXL/CS 206	CPC00642	CPC00648	117	149	86	10,5	26	11,5	41	54	56	60	50	12500	11200	13000
	40	35	SXL/CS 207	CPC00643	CPC00649	130	163	94	10,5	26	10,5	45	57	59	70	55	16600	15300	14000
	45	40	SXL/CS 208	CPC00644	CPC00650	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	20000	19000	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CS LL and MSFL/CS LL
Supporti a flangia ovale - Serie SFL/CS LL e MSFL/CS LL



Back gasket for shouldered shaft / Guarnizione posteriore per albero con spallamento

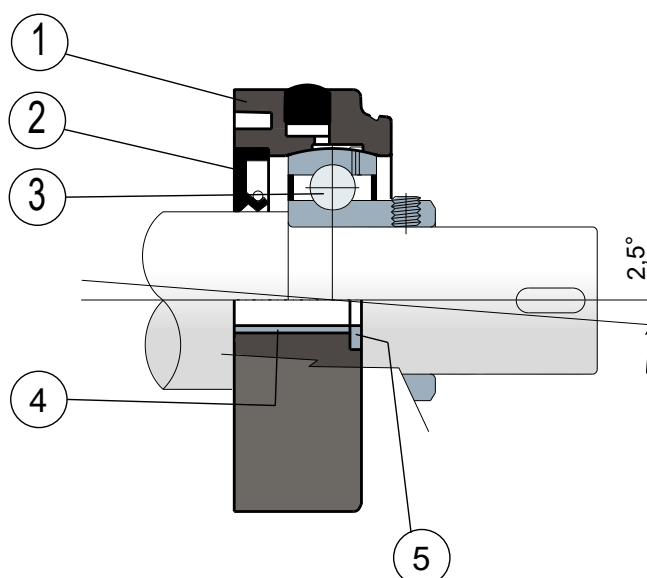

-  1 - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - UNI 6592 support washer made out of stainless steel AISI 304.

-  1 - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules.
 Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

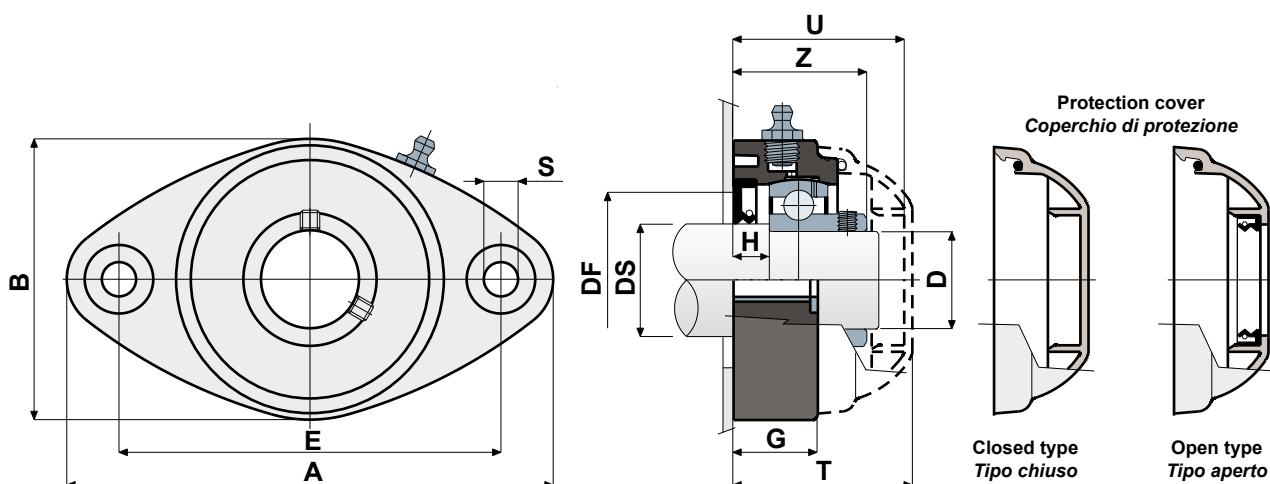

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																			
DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			LONG LIFE BEARINGS		E	A	B	S	G	H	Z	U	T	DF		C	C0	(N)	
			BLACK NERO	WHITE BIANCO										Max	Min				
	25	20	SFL/CS 204 LL	CPB00885	CPB00891	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500
S	25	20	MSFL/CS 204 LL	CPB00886	CPB00892	76,5	100	70	10,5	11	8,5	33,5	44	46,5	45	40	12800	6600	8500
	30	25	SFL/CS 205 LL	CPB00887	CPB00893	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000
	35	30	SFL/CS 206 LL	CPB00888	CPB00894	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000
	40	35	SFL/CS 207 LL	CPB00889	CPB00895	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000
	45	40	SFL/CS 208 LL	CPB00890	CPB00896	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

DS	D	SERIE	Support codes/ <i>Codici supporto</i>		Dimensions/ <i>Dimensioni</i> (mm)												Bearing load <i>Carico cuscinetto</i> (N)		Bearing support load <i>Carico supporto</i>
			LONG LIFE BEARINGS																
			BLACK NERO	WHITE BIANCO	E	A	B	S	G	H	Z	U	T	DF		C	C0	(N)	
														Max	Min				
	25	20	SXL/CS 204 LL	CPB00897	CPB00903	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	8300	6600	8500
S	25	20	MSXL/CS 204 LL	CPB00898	CPB00904	76,5	100	70	10,5	11	8,5	33,5	44	46,5	45	40	8300	6600	8500
	30	25	SXL/CS 205 LL	CPB00899	CPB00905	99	131	72	10,5	22	10	36	47	49	50	45	9150	7800	10000
	35	30	SXL/CS 206 LL	CPB00900	CPB00906	117	149	86	10,5	26	11,5	41	54	56	60	50	12500	11200	13000
	40	35	SXL/CS 207 LL	CPB00901	CPB00907	130	163	94	10,5	26	10,5	45	57	59	70	55	16600	15300	14000
	45	40	SXL/CS 208 LL	CPB00902	CPB00908	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	20000	19000	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFFL



Supporti a flangia ovale - Serie SFFL



The bearing cover integrated into the body of the support guarantees maximum sanitation
 La copertura del cuscinetto integrata nel corpo del supporto garantisce la massima sanificazione

Back gasket for shouldered shaft

Guarnizione posteriore per albero con spallamento

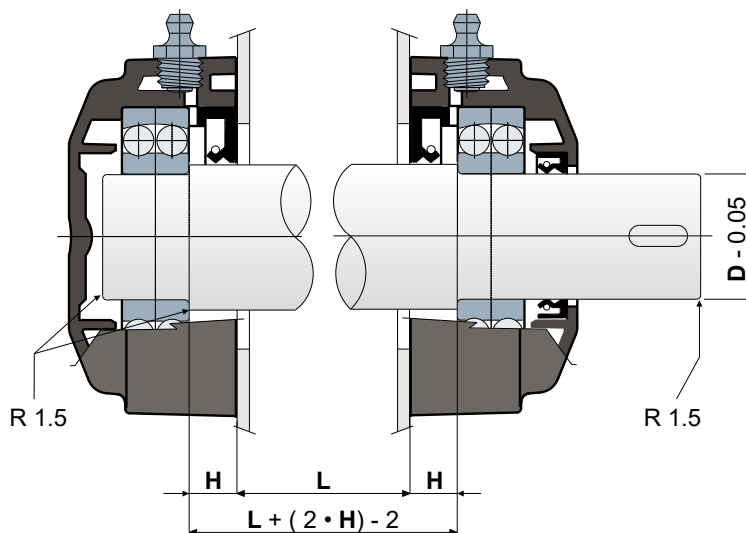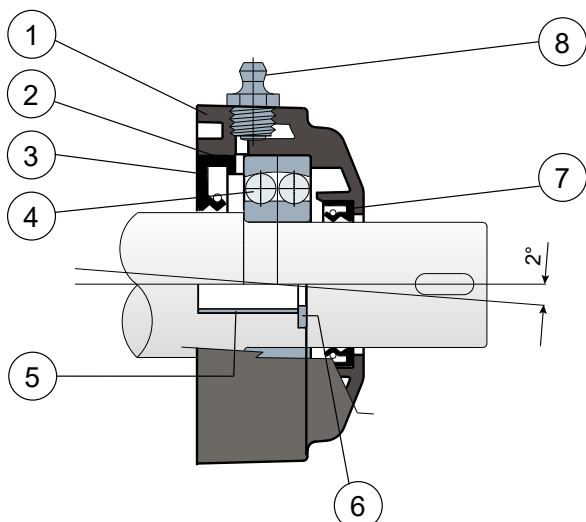

- 1 - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2 - Intermediate bearing ring spacer made out of black colour polyamide reinforced with glass fibers.
- 3 - Back gasket made out of NBR rubber for turning shaft seal.
- 4 - Chrome steel bearing type 1200 supplied without lubricant.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 6 - UNI 6592 support washer made out of stainless steel AISI 304.
- 7 - Front gasket made out of NBR rubber for turning shaft seal.
- 8 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

- 1 - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2 - Distanziale intermedio anello cuscinetto in poliammide di colore nero rinforzata con fibre di vetro.
- 3 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 4 - Cuscinetto in acciaio al cromo tipo 1200 fornito senza lubrificante.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 6 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 7 - Guarnizione anteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 8 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.



Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2°

For further information please contact our technical office or sales department.


Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

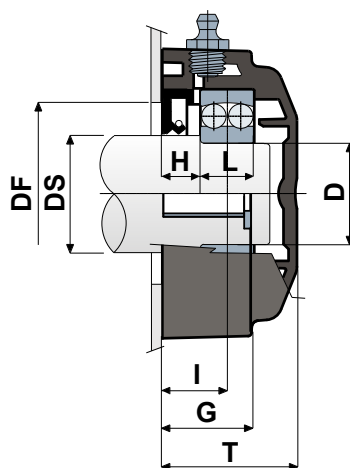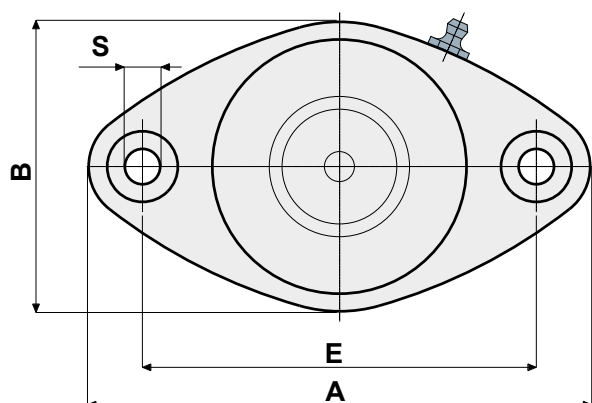

Closed type
Tipo chiuso



Open type
Tipo aperto

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			BLACK CLOSED NERO CHIUSO	BLACK OPEN NERO APERTO	E	A	B	S	G	H	I	L	T	DF		C	C0	(N)	
														Max	Min				
25	20	SFFL 204	CPA00812	CPA00814	90	118	64	10,5	19	11	18	14	35,5	45	40	12700	3400	11500	
30	25	SFFL 205	CPA00658	CPA00660	99	131	72	10,5	22	11	18,8	15	36,5	50	45	14300	4000	11500	
35	30	SFFL 206	CPA00659	CPA00661	117	149	86	10,5	26	11	19,3	16	40	60	50	15600	4650	12650	
40	35	SFFL 207	CPA00813	CPA00815	130	163	94	10,5	26	11	19,5	17	40,7	70	60	19000	6000	12650	

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO



DS	D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
					WHITE CLOSED BIANCO CHIUSO	WHITE OPEN BIANCO APERTO	E	A	B	S	G	H	I	L	T	DF		C	C0
			Max	Min															
25	20	SFFL 204	CPA00816	CPA00818	90	118	64	10,5	19	11	18	14	35,5	45	40	12700	3400	11500	
30	25	SFFL 205	CPA00662	CPA00664	99	131	72	10,5	22	11	18,8	15	36,5	50	45	14300	4000	11500	
35	30	SFFL 206	CPA00663	CPA00665	117	149	86	10,5	26	11	19,3	16	40	60	50	15600	4650	12650	
40	35	SFFL 207	CPA00817	CPA00819	130	163	94	10,5	26	11	19,5	17	40,7	70	60	19000	6000	12650	

Oval flanged bearing supports - Series HSFL/CX and HSXL/CX
Supporti a flangia ovale con borchie - Serie HSFL/CX e HSXL/CX



Without protection cover
Senza coperchio di protezione

Example of applications
Esempio di applicazione

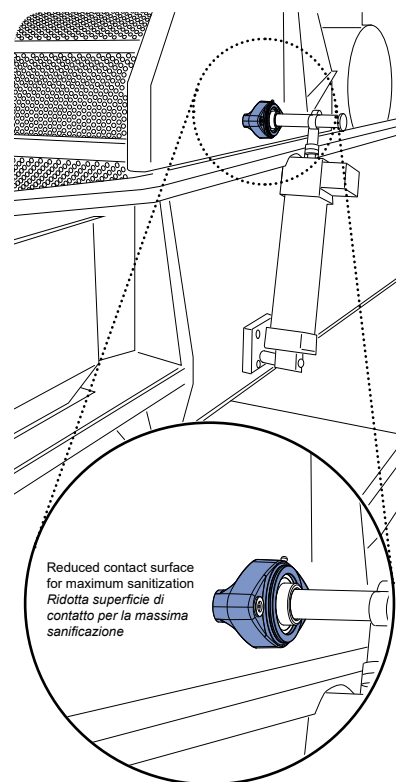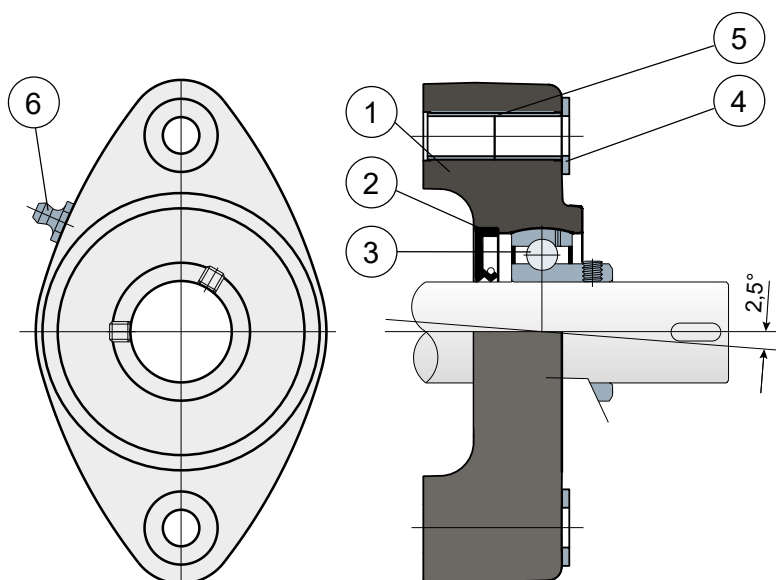

-  1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal.
- 3 - Chrome steel or stainless steel bearing AISI 440.
- 4 - UNI 6592 support washer made out of stainless steel AISI 304.
- 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


-  1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

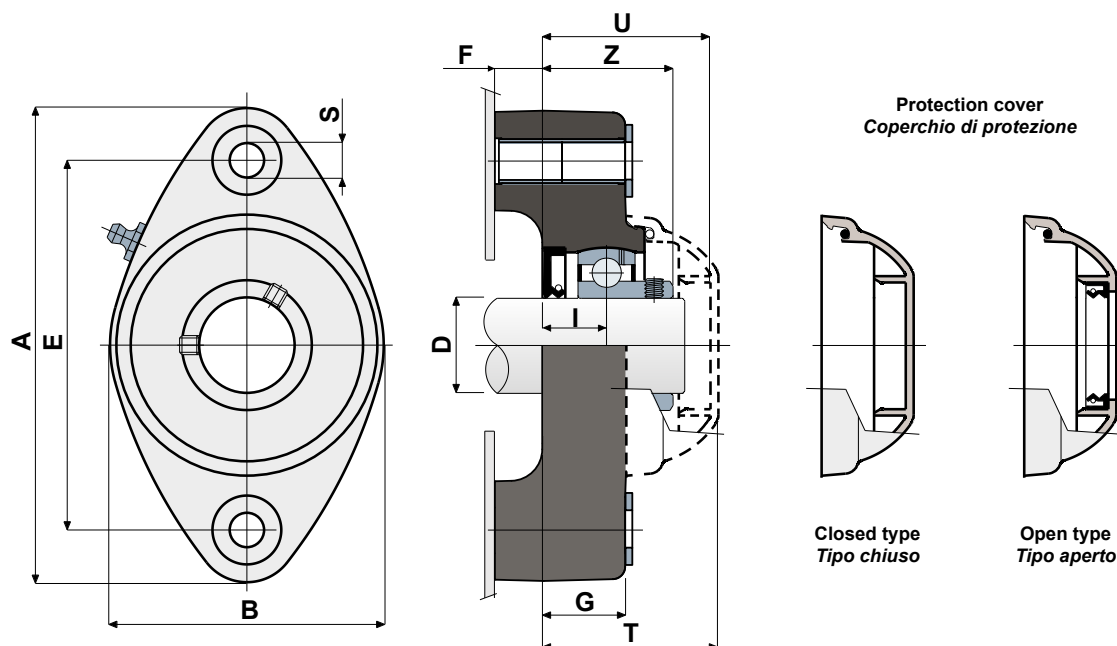

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)
20	HSFL/CX 204	CPC00019	90	118	64	10,5	15	19,2	15,5	33,8	44	46,5	12800	6600	8500
25	HSFL/CX 205	CPB00709	99	131	72	10,5	12	22	17,4	36,9	47	49,5	14000	7800	10000
30	HSFL/CX 206	CPA00666	117	149	86	10,5	15	26	20	41	52,5	55	19500	11300	13000
35	HSFL/CX 207	CPC00020	130	163	94	10,5	15	26,3	20	43,2	56,3	59	25500	15300	14000
40	HSFL/CX 208	CPC00021	144	172	100	10,5	15	26,3	19,5	44,8	65,5	68	32500	19800	15000

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)
20	HSXL/CX 204	CPC00022	90	118	64	10,5	15	19,2	15,5	33,8	44	46,5	8300	6600	8500
25	HSXL/CX 205	CPB00710	99	131	72	10,5	12	22	17,4	36,9	47	49,5	9150	7800	10000
30	HSXL/CX 206	CPA00667	117	149	86	10,5	15	26	20	41	52,5	55	12500	11300	13000
35	HSXL/CX 207	CPC00023	130	163	94	10,5	15	26,3	20	43,2	56,3	59	16600	15300	14000
40	HSXL/CX 208	CPC00024	144	172	100	10,5	15	26,3	19,5	44,8	65,5	68	20000	19000	15000

COVER CODES/CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support codes Codici supporto	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)
1"	HSFL/CX 205	CP001885	99	131	72	10,5	15	22	17,4	36,9	47	49,5	14000	7800	10000
1 1/4"	HSFL/CX 206	CP001886	117	149	86	10,5	15	26	20	41	52,5	55	19500	11300	13000

COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.


Oval flanged bearing supports - Series HSFL/CX EC
Supporti a flangia ovale con borchie - Serie HSFL/CX EC



Without protection cover
Senza coperchio di protezione

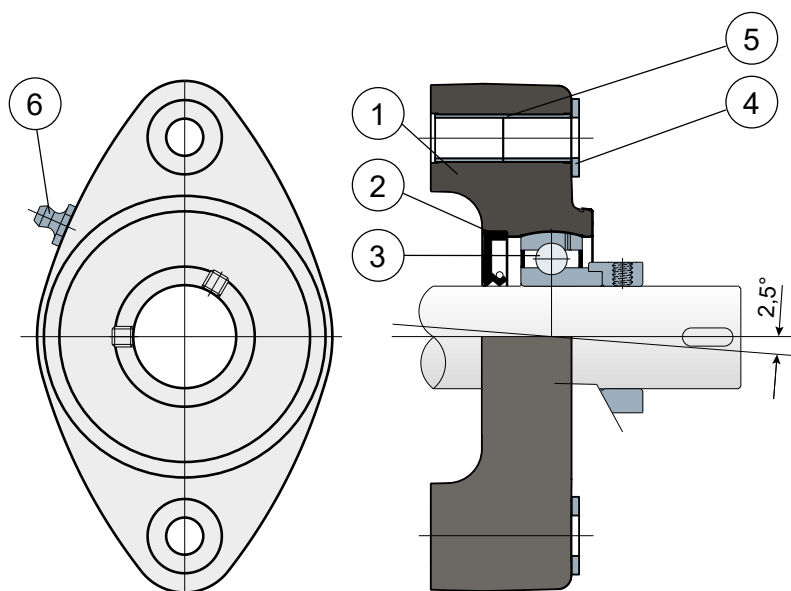

Example of applications
Esempio di applicazione

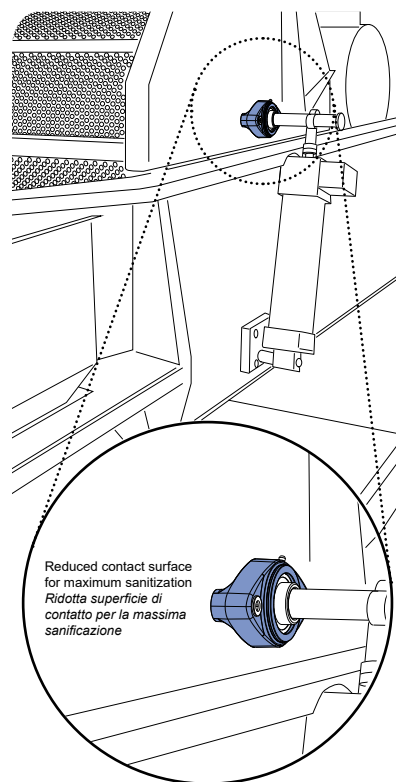


- 1** - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
2 - Back gasket made out of NBR rubber for turning shaft seal.
3 - Chrome steel bearing.
4 - UNI 6592 support washer made out of stainless steel AISI 304.
5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
6 - Greaser, straight type with 1/8 gas thread, made out of stainless steel AISI 303.

- 1** - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
3 - Cuscinetto in acciaio al cromo.
4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
6 - Ingrassatore tipo dritto con filetto da 1/8 gas in acciaio inox AISI 303.

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

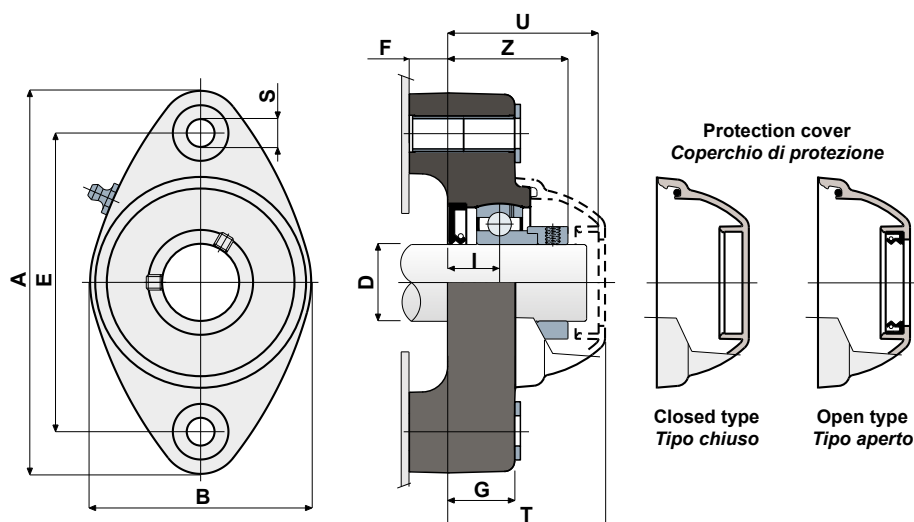

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																
D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)	
20	HSFL/CX 204 EC	CPC00025	90	118	64	10,5	15	19,2	15,5	39	50,8	53,3	12800	6600	8500	
25	HSFL/CX 205 EC	CPC00886	99	131	72	10,5	15	22	17,4	40,9	52,9	55,4	14000	7800	10000	
30	HSFL/CX 206 EC	CPC00887	117	149	86	10,5	15	26	20	46,7	59,4	61,9	19500	11300	13000	
35	HSFL/CX 207 EC	CPC00026	130	163	94	10,5	15	26,3	20	49,3	61,3	63,8	25500	15300	14000	
40	HSFL/CX 208 EC	CPC00027	144	172	100	10,5	15	26,3	19,5	52,2	65,5	68	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018





Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series HSFL/CX LL and HSXL/CX LL
Supporti a flangia ovale con borchie - Serie HSFL/CX LL e HSXL/CX LL



Without protection cover
Senza coperchio di protezione

Example of applications
Esempio di applicazione

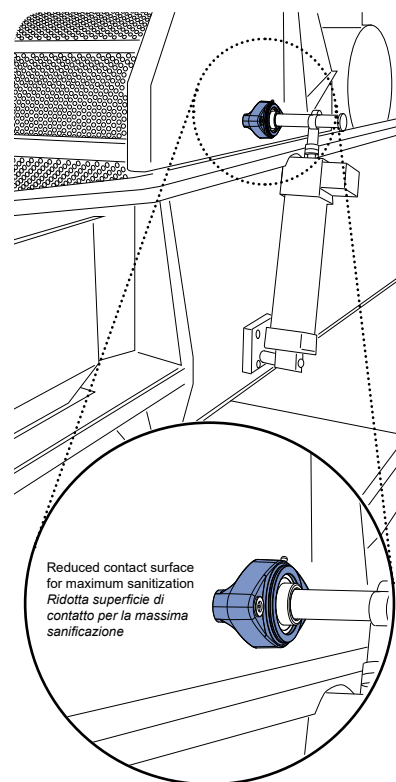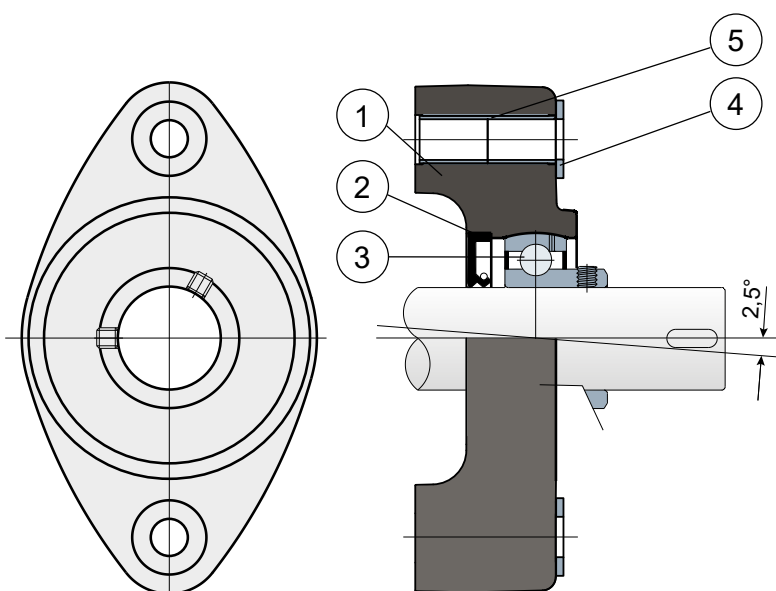

- 1** - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
2 - Back gasket made out of NBR rubber for turning shaft seal.
3 - Chrome steel or stainless steel bearing AISI 440.
4 - UNI 6592 support washer made out of stainless steel AISI 304.
5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.

- 1** - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
3 - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.


NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

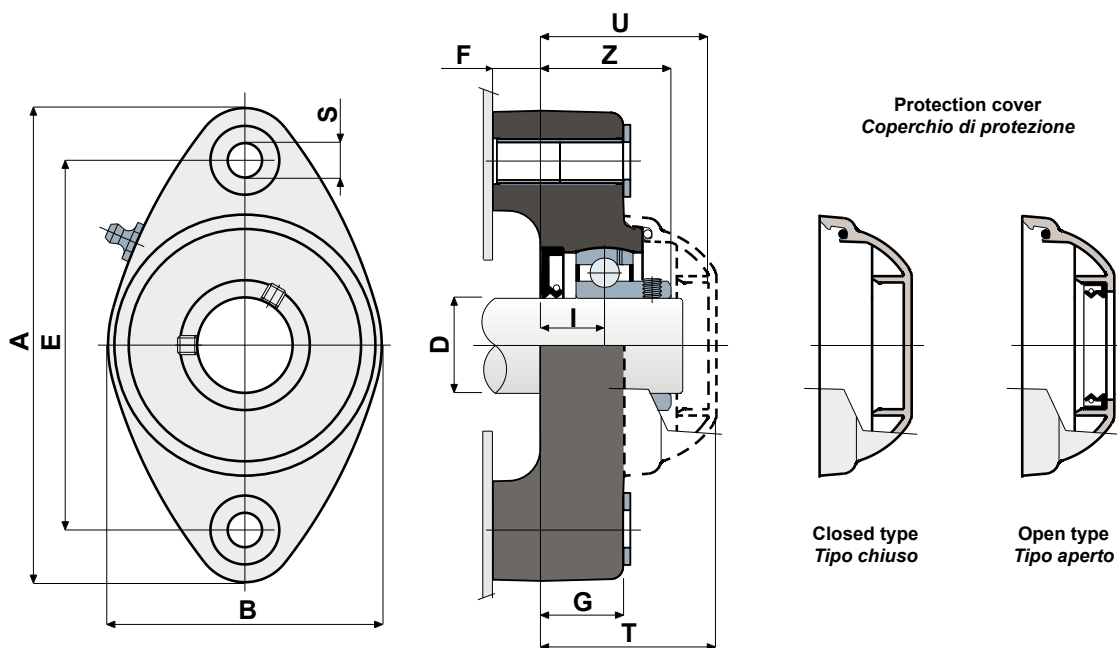

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)
20	HSFL/CX 204 LL	CPC00028	90	118	64	10,5	15	19,2	15,5	33,8	44	46,5	12800	6600	8500
25	HSFL/CX 205 LL	CPB00909	99	131	72	10,5	12	22	17,4	36,9	47	49,5	14000	7800	10000
30	HSFL/CX 206 LL	CPB00910	117	149	86	10,5	15	26	20	41	52,5	55	19500	11300	13000
35	HSFL/CX 207 LL	CPC00029	130	163	94	10,5	15	26,3	20	43,2	56,3	59	25500	15300	14000
40	HSFL/CX 208 LL	CPC00030	144	172	100	10,5	15	26,3	19,5	44,8	65,5	68	32500	19800	15000

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)
20	HSXL/CX 204 LL	CPC00031	90	118	64	10,5	15	19,2	15,5	33,8	44	46,5	8300	6600	8500
25	HSXL/CX 205 LL	CPB00911	99	131	72	10,5	12	22	17,4	36,9	47	49,5	9150	7800	10000
30	HSXL/CX 206 LL	CPB00912	117	149	86	10,5	15	26	20	41	52,5	55	12500	11300	13000
35	HSXL/CX 207 LL	CPC00032	130	163	94	10,5	15	26,3	20	43,2	56,3	59	16600	15300	14000
40	HSXL/CX 208 LL	CPC00033	144	172	100	10,5	15	26,3	19,5	44,8	65,5	68	20000	19000	15000

COVER CODES/CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)										Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS													
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)
1"	HSFL/CX 205 LL	CP001887	99	131	72	10,5	15	22	17,4	36,9	47	49,5	14000	7800	10000
1 1/4"	HSFL/CX 206 LL	CP001888	117	149	86	10,5	15	26	20	41	52,5	55	19500	11300	13000

COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1 1/4"	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025





Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series HSFL/CX EC LL
Supporti a flangia ovale con borchie - Serie HSFL/CX EC LL



Without protection cover
Senza coperchio di protezione

Example of applications
Esempio di applicazione

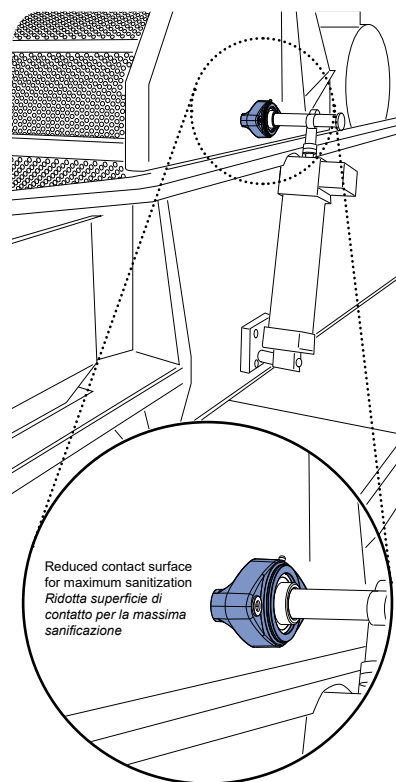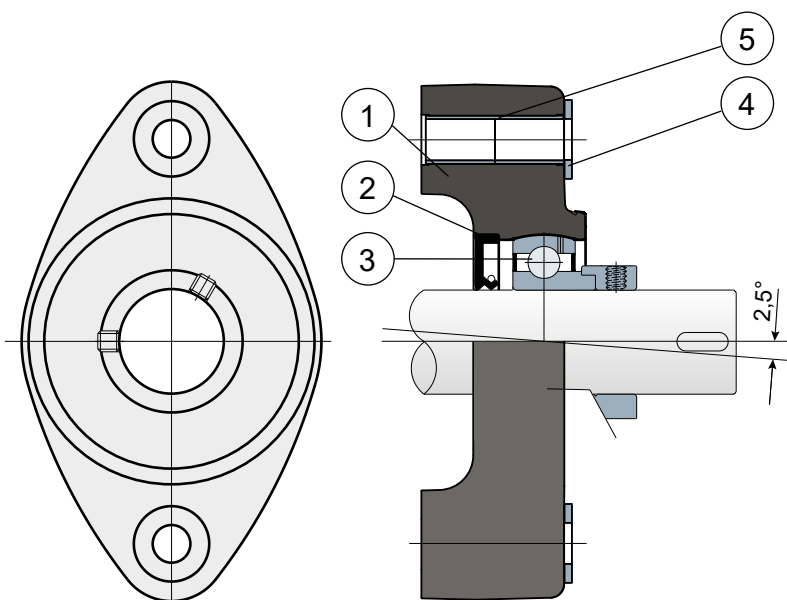

-  1 - Support body made out of **BLUE RAL 5005** colour polyamide reinforced with glass fibers.
 2 - Back gasket made out of NBR rubber for turning shaft seal.
 3 - Chrome steel bearing.
 4 - UNI 6592 support washer made out of stainless steel AISI 304.
 5 - Spacer for fixing reinforcement made out of stainless steel AISI 304.

-  1 - Corpo esterno supporto in poliammide di colore **BLU RAL 5005** rinforzata con fibre di vetro.
 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
 3 - Cuscinetto in acciaio al cromo.
 4 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
 5 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.


Support dimensions respect ISO 3228 set of rules
 Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Le dimensioni del supporto sono conformi alla norma ISO 3228
 Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

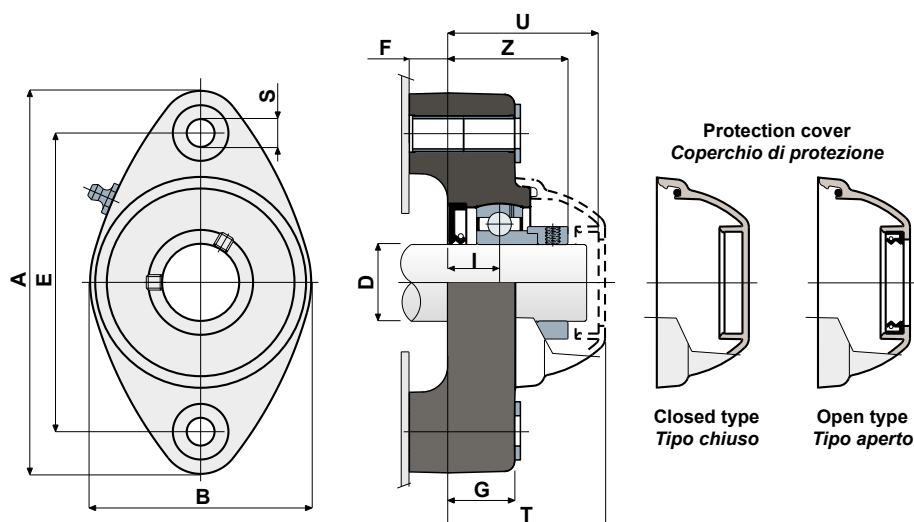

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Codes/Codici	Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS														
		Blue Ral 5005	E	A	B	S	F	G	I	Z	U	T	C	C0	(N)	
20	HSFL/CX 204 EC LL	CPC00034	90	118	64	10,5	15	19,2	15,5	39	50,8	53,3	12800	6600	8500	
25	HSFL/CX 205 EC LL	CPB00913	99	131	72	10,5	15	22	17,4	40,9	52,9	55,4	14000	7800	10000	
30	HSFL/CX 206 EC LL	CPB00914	117	149	86	10,5	15	26	20	46,7	59,4	61,9	19500	11300	13000	
35	HSFL/CX 207 EC LL	CPC00035	130	163	94	10,5	15	26,3	20	49,3	61,3	63,8	25500	15300	14000	
40	HSFL/CX 208 EC LL	CPC00036	144	172	100	10,5	15	26,3	19,5	52,2	65,5	68	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CXA and SXL/CXA
Supporti a flangia ovale - Serie SFL/CXA e SXL/CXA



External cover made out of stainless AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

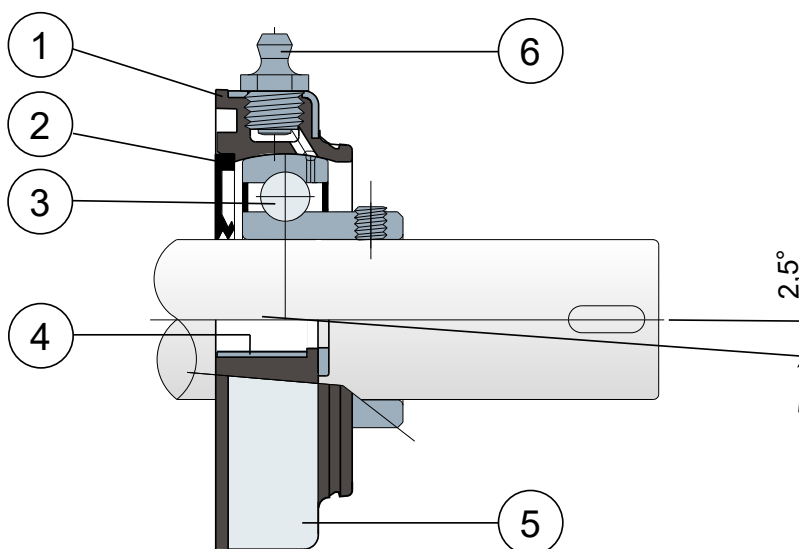

-  **1** - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2** - Back gasket made out of NBR rubber for turning shaft seal
- 3** - Chrome steel or stainless steel bearing AISI 440.
- 4** - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5** - External cover of support made out of AISI 304 stainless steel.
- 6** - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

-  **1** - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2** - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3** - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4** - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5** - Copertura esterna supporto in acciaio inox AISI 304.
- 6** - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.


NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

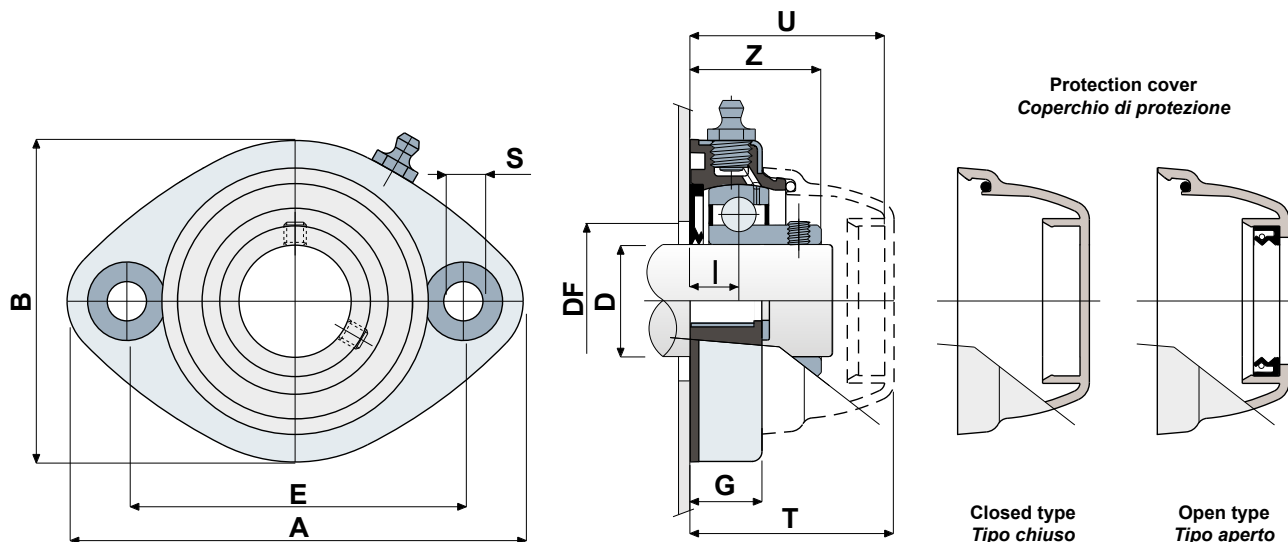

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
30	SFL/CXA 206	CPA00668	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000	
35	SFL/CXA 207	CPA00669	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000	
40	SFL/CXA 208	CPA00670	117	147	112	11	27	20	48,5	65,5	68	78	65	32500	19800	15000	

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BEARING AISI 440 / CUSCINETTI IN ACCIAIO INOX AISI 440																
D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
30	SXL/CXA 206	CPA00671	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000
35	SXL/CXA 207	CPA00672	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000
40	SXL/CXA 208	CPA00673	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (inches)	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
1 1/4	SFL/CXA 206	CPA00674	117	147	112	11	27	21	42	65.5	68	60	50	19500	11300	13000


COVER CODES / CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1" 1/4	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Oval flanged bearing supports - Series SFL/CXA EC Supporti a flangia ovale - Serie SFL/CXA EC



External cover made out of stainless AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

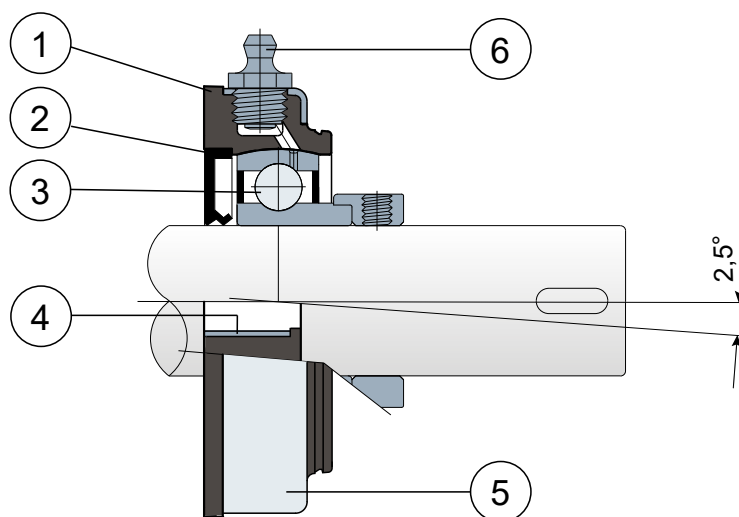

- 1 - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal
- 3 - Chrome steel bearing.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - External cover of support made out of AISI 304 stainless steel.
- 6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

- 1 - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Copertura esterna supporto in acciaio inox AISI 304.
- 6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

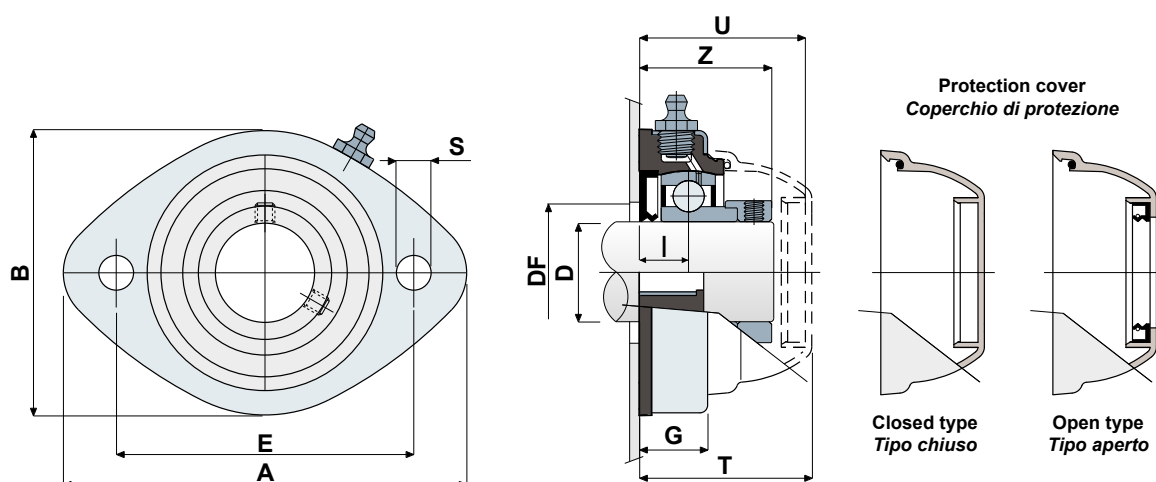

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																	
D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)											Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto	
			E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	30	SFL/CXA 206 EC	CPC00883	117	147	112	11	27	21	47,7	65,5	68	60	50	19500	11300	13000
	35	SFL/CXA 207 EC	CPC00884	117	147	112	11	27	20	49,3	65,5	68	70	55	25500	15300	14000
	40	SFL/CXA 208 EC	CPC00885	117	147	112	11	27	19,5	52,2	65,5	68	78	65	32500	19800	15000

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Oval flanged bearing supports - Series SFL/CXA LL and SXL/CXA LL
Supporti a flangia ovale - Serie SFL/CXA LL e SXL/CXA LL



External cover made out of stainless AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

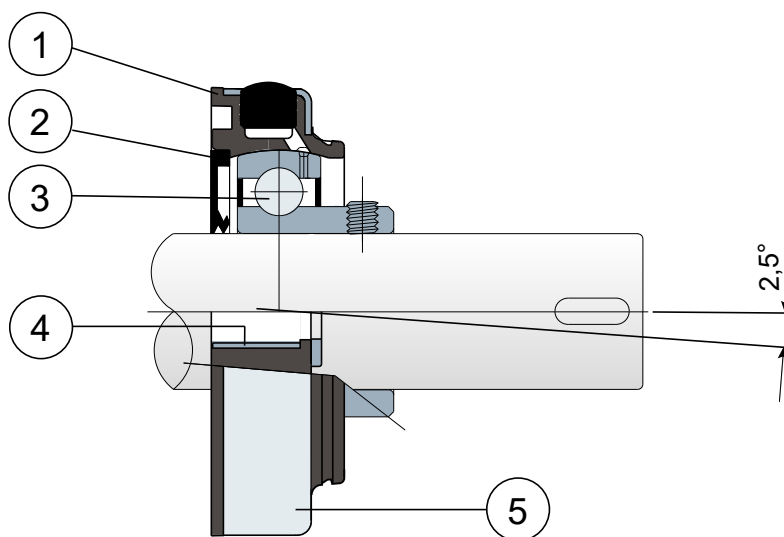

-  **1** - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2** - Back gasket made out of NBR rubber for turning shaft seal
- 3** - Chrome steel or stainless steel bearing AISI 440.
- 4** - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5** - External cover of support made out of AISI 304 stainless steel.

-  **1** - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2** - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3** - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4** - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5** - Copertura esterna supporto in acciaio inox AISI 304.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Maximum shaft alignment error 2,5°
For further information please contact our technical office or sales department.


NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Errore massimo di allineamento dell'albero 2,5°
Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
 Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Technical data/Dati tecnici

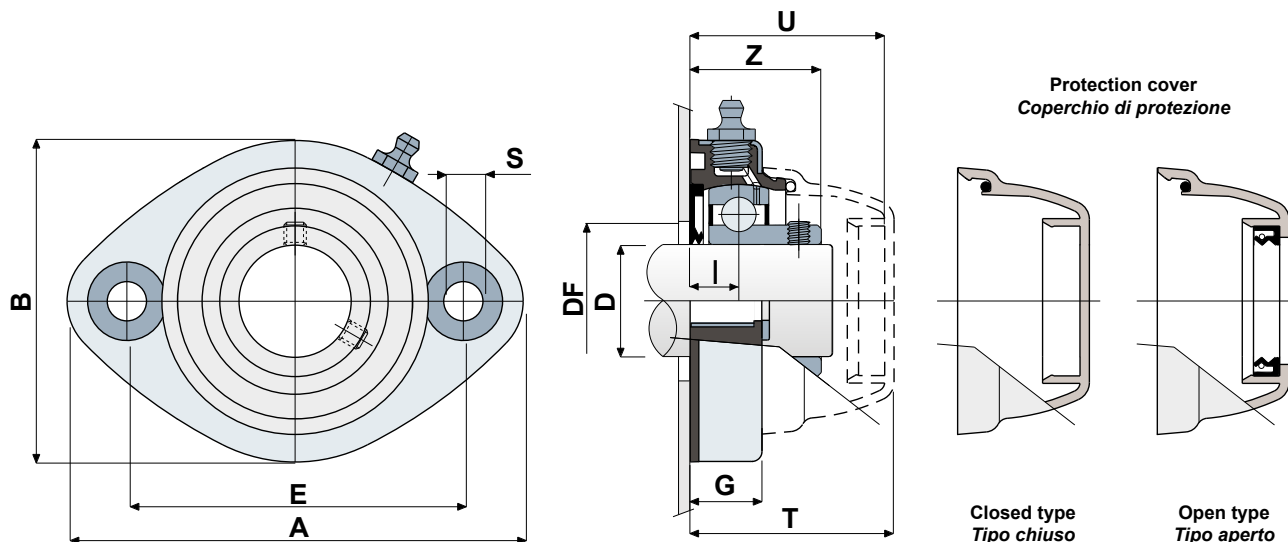

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
	30	SFL/CXA 206 LL	CPB00915	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000
	35	SFL/CXA 207 LL	CPB00916	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000
	40	SFL/CXA 208 LL	CPB00917	117	147	112	11	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

D	SERIE	Support code Codici supporto	Dimensions/Dimensioni (mm)												Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
 30	SXL/CXA 206 LL	CPB00918	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000	
 35	SXL/CXA 207 LL	CPB00919	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000	
 40	SXL/CXA 208 LL	CPB00920	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019	CFB 206-7-8	CPA02008	CFB 206A M2	CPA02017
35	CF 206-7-8	CP002008	CF 207A M	CP002021	CFB 206-7-8	CPA02008	CFB 207A M2	CPA02019
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING/CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING/CUSCINETTO IN ACCIAIO AL CROMO																
D (inches)	SERIE	Support code <i>Codici supporto</i>	Dimensions/ <i>Dimensioni</i> (mm)											Bearing load <i>Carico cuscinetto</i> (N)		Bearing support load <i>Carico supporto</i>
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)
												Max	Min			
1 1/4	SFL/CXA 206 LL	CPB00921	117	147	112	11	27	21	42	65.5	68	60	50	19500	11300	13000


COVER CODES/CODICI COPERCHIO

D (inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1" 1/4	CF 206-7-8	CP002008	CF 206A M4	CP002026	CFB 206-7-8	CPA02008	CFB 206A M4	CPA02026

Oval flanged bearing supports - Series SFL/CXA EC LL Supporti a flangia ovale - Serie SFL/CXA EC LL



External cover made out of stainless AISI 304, without protection cover
Copertura in acciaio inox AISI 304, senza coperchio di protezione

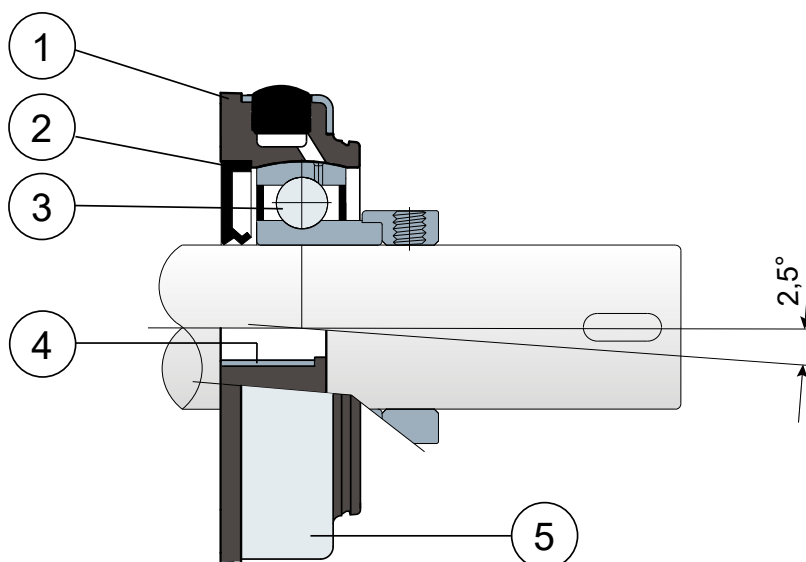

- 1 - Internal body of support made out of black colour polypropylene reinforced with glass fibers.
- 2 - Back gasket made out of NBR rubber for turning shaft seal
- 3 - Chrome steel bearing.
- 4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5 - External cover of support made out of AISI 304 stainless steel.

- 1 - Corpo interno supporto in polipropilene di colore nero rinforzato con fibre di vetro.
- 2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3 - Cuscinetto in acciaio al cromo.
- 4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5 - Copertura esterna supporto in acciaio inox AISI 304.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

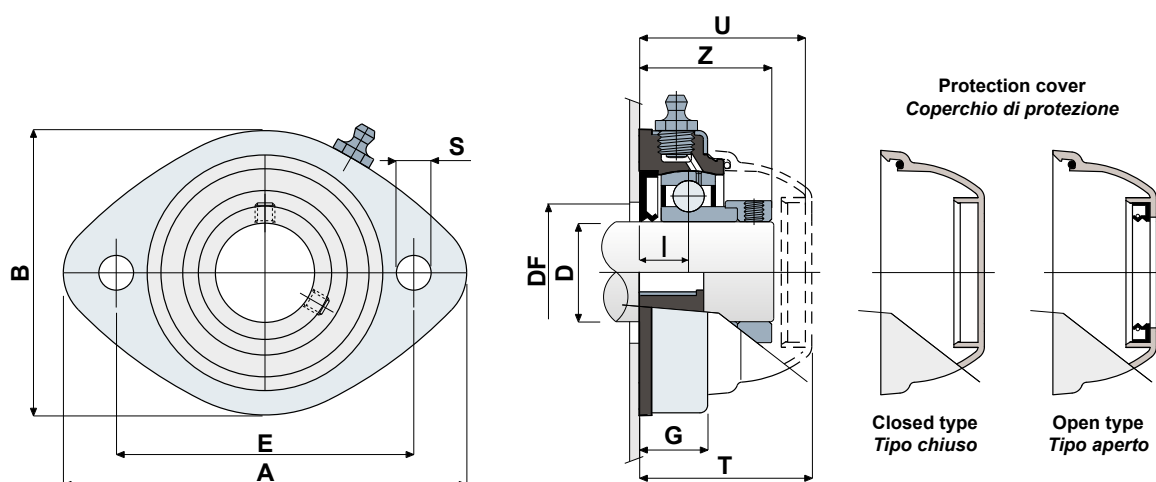

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																	
D	SERIE	Support code <i>Codici supporto</i>	Dimensions/ <i>Dimensioni</i> (mm)												Bearing load <i>Carico cuscinetto</i> (N)		Bearing support load <i>Carico supporto</i>
		LONG LIFE BEARINGS	E	A	B	S	G	I	Z	U	T	DF		C	C0	(N)	
												Max	Min				
 30	SFL/CXA 206 EC LL	CPB00922	117	147	112	11	27	21	47,7	65,5	68	60	50	19500	11300	13000	
 35	SFL/CXA 207 EC LL	CPB00923	117	147	112	11	27	20	49,3	65,5	68	70	55	25500	15300	14000	
 40	SFL/CXA 208 EC LL	CPB00924	117	147	112	11	27	19,5	52,2	65,5	68	78	65	32500	19800	15000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
30	CF 206-7-8	CP002008	CF 206A M	CP002019
35	CF 206-7-8	CP002008	CF 207A M	CP002021
40	CF 206-7-8	CP002008	CF 208A	CP002018




Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.
Supporti con flangia Solid: flangia realizzata a superficie chiusa per garantire la massima sanificazione.

Side flanged bearing supports - Series SFB/CX and SXB/CX
Supporti a flangia laterale - Serie SFB/CX e SXB/CX



Without protection cover / Senza coperchio di protezione

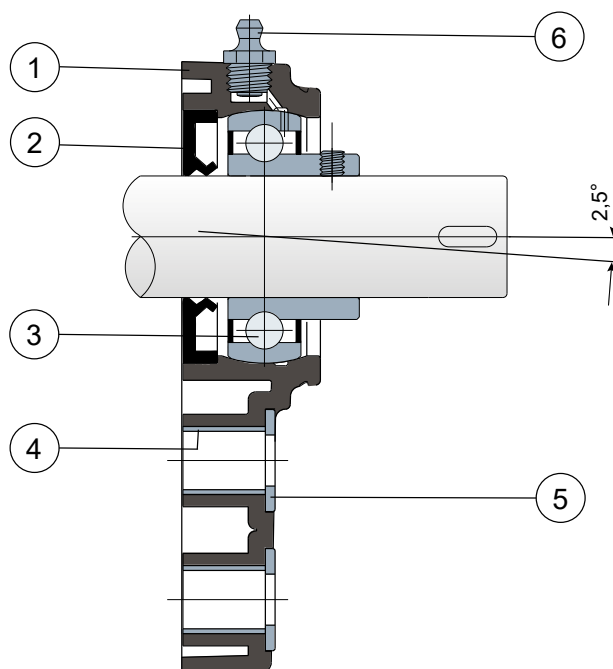

-  **1** - Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2** - Back gasket made out of NBR rubber for turning shaft seal.
- 3** - Chrome steel or stainless steel bearing AISI 440.
- 4** - Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5** - UNI 6592 support washer made out of stainless steel AISI 304.
- 6** - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: Protection cover on request colors **ORANGE RAL 2004** and **RED RAL 3000**

Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.


-  **1** - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
- 2** - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
- 3** - Cuscinetto in acciaio al cromo o acciaio inox AISI 440.
- 4** - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
- 5** - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
- 6** - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.

NOTA: Coperchio di protezione a richiesta colorazioni **ARANCIONE RAL 2004** e **ROSSO RAL 3000**

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

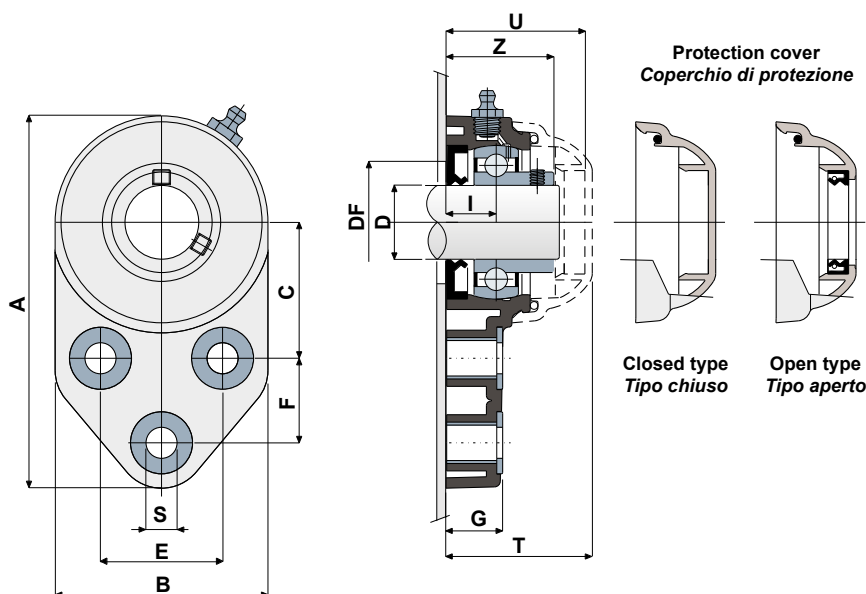

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO																				
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)														Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)	
															Max	Min				
20	SFB/CX 204	CP000696	CPB00663	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	
25	SFB/CX 205	CP000697	CPB00664	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	
30	SFB/CX 206	CPA00675	CPB00665	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000	
35	SFB/CX 207	CPA00676	CPB00666	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	25500	15300	13000	
40	SFB/CX 208	CP000698	CPB00667	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	

STAINLESS STEEL BEARING AISI 440 / CUSCINETTO IN ACCIAIO INOX AISI 440

STAINLESS STEEL BEARING AISI 440 C/CUSCINETTO IN ACCIAIO INOX AISI 440																				
D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)														Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)	
															Max	Min				
20	SXB/CX 204	CP000699	CPB00668	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	
25	SXB/CX 205	CP000700	CPB00669	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	
30	SXB/CX 206	CPA00677	CPB00670	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000	
35	SXB/CX 207	CPA00678	CPB00671	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	25500	15300	13000	
40	SXB/CX 208	CP000701	CPB00672	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204	CP002004	CF 204A	CP002014	CFB 204	CPA02004	CFB 204A	CPA02014
25	CF 205	CP002005	CF 205A	CP002015	CFB 205	CPA02005	CFB 205A	CPA02015
30	CF 206	CP002006	CF 206A	CP002016	CFB 206	CPA02006	CFB 206A	CPA02016
35	CF 207	CP002007	CF 207A	CP002017	CFB 207	CPA02007	CFB 207A	CPA02018
40	CF 206-7-8	CP002008	CF 208A	CP002018	CFB 206-7-8	CPA02008	CFB 208A	CPA02020

VERSIONS WITH MEASURES IN INCHES/VERSIONE CON MISURE IN POLLICI

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D (Inches)	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)														Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)	
															Max	Min				
1"	SFB/CX 205	CPA00679	CPB00673	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	
1" 1/4	SFB/CX 206	CPA00680	CPB00674	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000	


COVER CODES / CODICI COPERCHIO

D (Inches)	GREY/GRIGIO RAL 7042				BLUE/BLU RAL 5015			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
1"	CF 205	CP002005	CF 205A M	CP002024	CFB 205	CPA02005	CFB 205A M	CPA02024
1" 1/4	CF 206	CP002006	CF 206A M3	CP002025	CFB 206	CPA02006	CFB 206A M3	CPA02025

Side flanged bearing supports - Series SFB/CX EC
Supporti a flangia laterale - Serie SFB/CX EC



Without protection cover / Senza coperchio di protezione

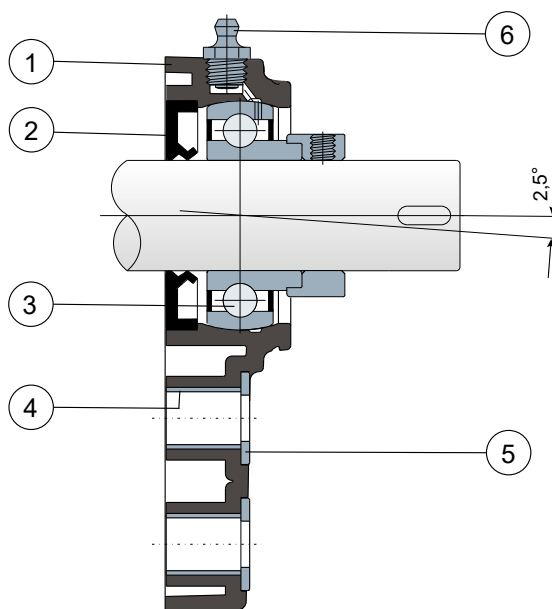

- 1** - Support body made out of black or white colour polyamide reinforced with glass fibers.
2 - Back gasket made out of NBR rubber for turning shaft seal.
3 - Chrome steel bearing.
4 - Spacer for fixing reinforcement made out of stainless steel AISI 304.
5 - UNI 6592 support washer made out of stainless steel AISI 304.
6 - Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

- 1** - Corpo esterno supporto in poliammide di colore nero o bianco rinforzata con fibre di vetro.
2 - Guarnizione posteriore a tenuta stagna in gomma NBR per alberi rotanti.
3 - Cuscinetto in acciaio al cromo.
4 - Distanziale di rinforzo fissaggi in acciaio inox AISI 304.
5 - Rosetta di appoggio UNI 6592 in acciaio inox AISI 304.
6 - Ingrassatore tipo dritto con filetto da 1/8 gas in ottone nichelato.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.

Errore massimo di allineamento dell'albero 2,5°

Per ulteriori informazioni contattare il nostro Ufficio Tecnico commerciale.

Technical data/Dati tecnici

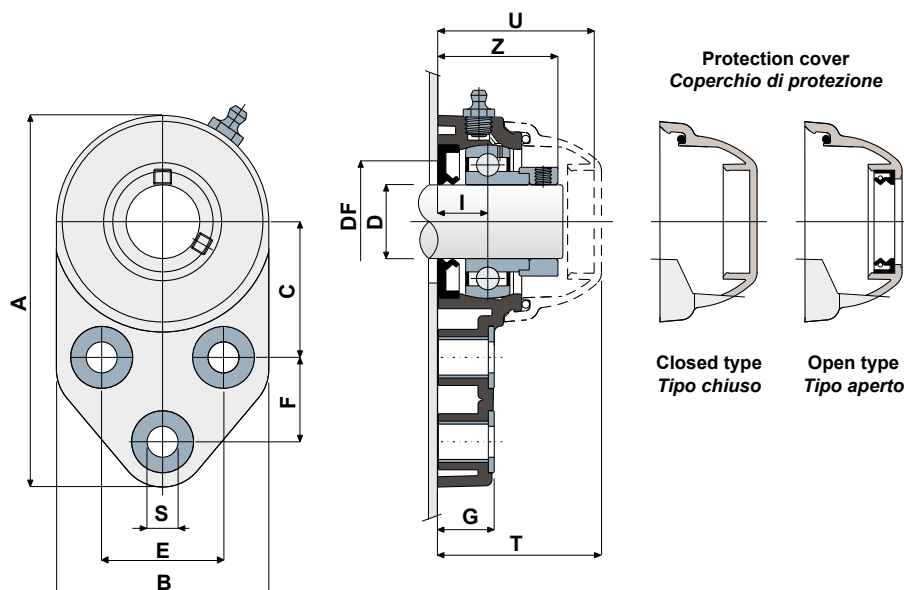

CHROME STEEL BEARING / CUSCINETTO IN ACCIAIO AL CROMO

D	SERIE	Support codes/Codici supporto		Dimensions/Dimensioni (mm)														Bearing load Carico cuscinetto (N)		Bearing support load Carico supporto
		BLACK NERO	WHITE BIANCO	E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	(N)	
															Max	Min				
20	SFB/CX 204 EC	CPC00888	CPC00893	41,3	126	72	46	28,6	10,5	19	18	41,5	54	56,5	45	40	12800	6600	8500	
25	SFB/CX 205 EC	CPC00889	CPC00894	41,3	126	72	46	28,6	10,5	19	17	40,5	52,9	55,4	50	45	14000	7800	9000	
30	SFB/CX 206 EC	CPC00890	CPC00895	47,6	142	85	52,4	32	10,5	26,3	20,7	47,4	59,4	61,9	60	50	19500	11300	11000	
35	SFB/CX 207 EC	CPC00891	CPC00896	51	155	94	60,5	32	10,5	26,3	20	49,3	61,3	63,8	70	55	25500	15300	13000	
40	SFB/CX 208 EC	CPC00892	CPC00897	50	165	100	60,5	41	10,5	26,3	19,5	52,2	65,5	68	78	65	32500	19800	18000	

COVER CODES / CODICI COPERCHIO

D	GREY/GRIGIO RAL 7042			
	Closed/Chiuso	Code/Codice	Open/Aperto	Code/Codice
20	CF 204 EC	CP002029	CF 204A EC	CP002035
25	CF 205 EC	CP002030	CF 205A EC	CP002036
30	CF 206 EC	CP002031	CF 206A EC	CP002037
35	CF 207 EC	CP002032	CF 207A EC	CP002038
40	CF 206-7-8	CP002008	CF 208A	CP002018